

# HAMMERS AND STRIKING TOOLS

## Strike by strike: hammers and striking tools from GEDORE withstand the toughest stress and force.

From the head to the handle, when it comes to hammers, it's safety that counts above all. GEDORE manufactures its own engineers' hammer, sledge hammers, bricklayer's hammers and more. Attention is paid to the correct tempering of the hammer head, a clean edge break on the face and pein, and the secure connection between head and handle.


The head and handle connection has been perfected by the ROTBAND-PLUS system developed by GEDORE. Seamless quality right down to the wood used.

GEDORE also makes no compromises when it comes to pin punches, drift punches and centre punches. All striking tools are hot forged, through-hardened and the impact heads are additionally inductively tempered. This is the only way to achieve the highest level of stability and work safety.



### ORIGINAL ROTBAND-PLUS SYSTEM - RELIABLE UNDER EXTREME LOADS

- Ring wedge distributes clamping force evenly over 360°, wood fibres remain intact
- Safety plate keeps shaft and head firmly connected
- Protective steel sleeve absorbs impacts and provides additional safety

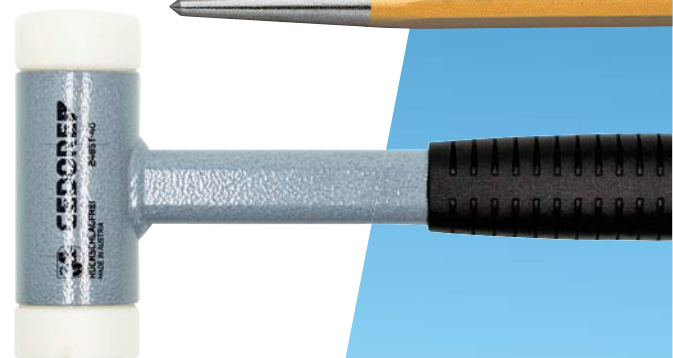

BALANCED  
NON-SLIP

#### HAMMER QUALITY FROM ONE HAND

- Strictly controlled quality steel and wood
- Manufactured by GEDORE in Germany

#### WOODEN HANDLES

- Break-proof ash handles meet the requirements of DIN norms
- Vibration-damping hickory handles withstand 3 to 4 times higher impacts




#### TUBULAR STEEL, FIBREGLASS AND RUBBER GRIP HANDLES

- Tubular steel handles with high bending strength are resistant to weather conditions
- Fibreglass handles are almost unbreakable and resistant to weather conditions, oils and greases
- Steel tube reinforced rubber handles are vibration damping, almost indestructible and resistant to oils and petrols





# **ROTBAND-PLUS** The original - A secure connection

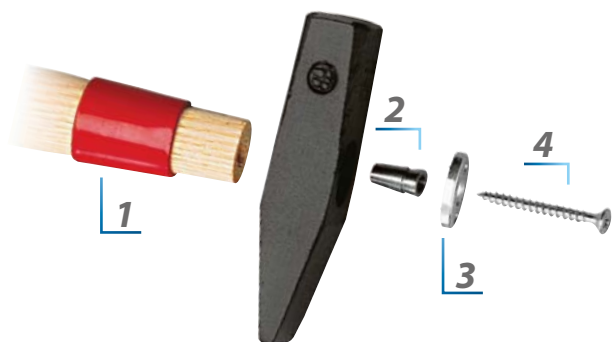

- 1** FIRM FIT OF THE HANDLE ON THE HEAD AND PROTECTION AGAINST MISSED HITS DUE TO STEEL SLEEVE
- 2** ROUND, CONICAL RING WEDGE FOR EVEN CONTACT PRESSURE
- 3** SAFETY PLATE STRENGTHENS THE CONNECTION BETWEEN THE SCREW AND THE RING WEDGE
- 4** WOODEN SCREW CONNECTS SECURING PLATE AND HANDLE FRICTIONALLY

- System developed by GEDORE - the original for increased safety and longer service life
- More than five times the tightening force with ROTBAND-PLUS
- Increased bending strength compared to conventional DIN hammers
- Absolutely firm connection between head and handle even after 1,000 failures
- Standardised ROTBAND-PLUS replacement shafts for optimising DIN hammers

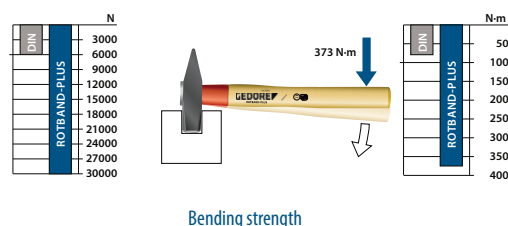

## 600 E + 600 H Engineers' hammer ROTBAND-PLUS - The Original



- > Forged hammer head DIN 1041
- > With contoured ash (E 600 E) or hickory (E 600 H) handle DIN 5111, additionally shaped with a long hardened handle protective steel sleeve
- > ROTBAND-PLUS handle attachment, high safety, long life




Code	No.	g	mm	kg
8581610	600 E-100	100	260	0,188
8581880	600 E-200	200	280	0,325
8581960	600 E-300	300	305	0,502
8582180	600 E-400	400	305	0,605
8582260	600 E-500	500	320	0,727
8582340	600 E-600	600	330	0,841
8582420	600 E-800	800	350	1,135
8582500	600 E-1000	1000	360	1,326
8582690	600 E-1500	1500	380	1,908
8582770	600 E-2000	2000	400	2,491
8582850	600 H-100	100	260	0,188
8582930	600 H-200	200	280	0,325
8583070	600 H-300	300	305	0,502
8583150	600 H-400	400	305	0,605
8583230	600 H-500	500	320	0,727
8583310	600 H-600	600	330	0,84
8583580	600 H-800	800	350	1,135
8583660	600 H-1000	1000	360	1,326
8583740	600 H-1500	1500	380	1,908
8583820	600 H-2000	2000	400	2,491

**600 IH**

Engineers' hammer  
ROTBAND-PLUS -  
The Original



- › The edges of the flat side of the head are induction hardened
- › Forged hammer head DIN 1041
- › With contoured hickory handle DIN 5111, additionally shaped with a long hardened handle protective steel sleeve
- › ROTBAND-PLUS handle attachment, high safety, long life


Code	No.	g 	l mm 	
<b>8583900</b>	600 IH-200	200	280	0,325
<b>8584040</b>	600 IH-300	300	300	0,502
<b>8584120</b>	600 IH-400	400	310	0,605
<b>8584200</b>	600 IH-500	500	320	0,727
<b>8584390</b>	600 IH-600	600	330	0,841
<b>8587300</b>	600 IH-800	800	350	1,135
<b>8587490</b>	600 IH-1000	1000	360	1,326
<b>8587570</b>	600 IH-1500	1500	380	1,908
<b>8588970</b>	600 IH-2000	2000	400	2,491

**E 600 E + E 600 H**

Spare handle  
ROTBAND-PLUS



- › Double curved ash (No. E 600 E) or hickory handle (No. E 600 H) DIN 5111
- › With hardened handle protective steel sleeve, tapered collar, fixing plate and wood screw


Code	No.	for  g	l mm 	
<b>8589000</b>	E 600 E-100	100	260	0,076
<b>8589190</b>	E 600 E-200	200	280	0,099
<b>8589270</b>	E 600 E-300	300	300	0,15
<b>8589350</b>	E 600 E-400	400	310	0,179
<b>8589430</b>	E 600 E-500	500	320	0,185
<b>8589510</b>	E 600 E-600	600	330	0,214
<b>8589780</b>	E 600 E-800	800	350	0,21
<b>8589860</b>	E 600 E-1000	1000	360	0,288
<b>8589940</b>	E 600 E-1500	1500	380	0,35
<b>8593700</b>	E 600 E-2000	2000	400	0,377
<b>8593890</b>	E 600 H-100	100	260	0,081
<b>8595080</b>	E 600 H-200	200	280	0,12
<b>8595160</b>	E 600 H-300	300	300	0,134
<b>8595240</b>	E 600 H-400	400	310	0,18
<b>8596480</b>	E 600 H-500	500	320	0,198
<b>8596560</b>	E 600 H-600	600	330	0,234
<b>8596640</b>	E 600 H-800	800	350	0,296
<b>8597880</b>	E 600 H-1000	1000	360	0,315
<b>8597960</b>	E 600 H-1500	1500	380	0,373
<b>8599070</b>	E 600 H-2000	2000	400	0,442

**E 5**

Spare tapered collar



- › For safe fastening of the wooden handles




Code	No.	Ø	
<b>8593970</b>	E 5-100	7	0,001
<b>8594000</b>	E 5-200	8	0,003
<b>8594190</b>	E 5-300	10	0,004
<b>8594270</b>	E 5-400	11	0,005
<b>8594350</b>	E 5-500	12	0,007
<b>8594860</b>	E 5-600	13	0,008
<b>8594430</b>	E 5-800	14	0,009
<b>8594940</b>	E 5-1000	14	0,009
<b>8594510</b>	E 5-1500	15	0,013
<b>8594780</b>	E 5-2000	16	0,014

#### 4 E

Engineers' hammer



- › Forged hammer head DIN 1041
- › Ash handle DIN 5111




Code	No.	g 	l mm 	
8586090	4 E-50	50	250	0,089
8586170	4 E-100	100	260	0,158
8586250	4 E-200	200	280	0,275
8586330	4 E-300	300	300	0,44
8586410	4 E-400	400	310	0,53
8586680	4 E-500	500	320	0,625
8586760	4 E-600	600	330	0,75
8586840	4 E-800	800	350	0,93
8586920	4 E-1000	1000	360	1,18
8587060	4 E-1500	1500	380	1,76
8587140	4 E-2000	2000	400	2,32

#### E 4 E

Spare handle



- › Ash handle DIN 5111




Code	No.	for  g	l mm 	
8587650	E-4 E-50	50	250	0,033
8587730	E-4 E-100	100	260	0,045
8587810	E-4 E-200	200	280	0,085
8588110	E-4 E-400	400	310	0,1
8588380	E-4 E-500	500	320	0,16
8588460	E-4 E-600	600	330	0,14
8588540	E-4 E-800	800	350	0,165
8588620	E-4 E-1000	1000	360	0,183
8588700	E-4 E-1500	1500	380	0,196
8588890	E-4 E-2000	2000	400	0,261

#### 500 F

Engineers' hammer



- › Forged hammer head
- › Virtually unbreakable fibreglass handle with plastic grip
- › Additionally hardened handle protective steel sleeve, with secured head



Code	No.	g 	l mm 	
8598420	500 F-500	500	320	0,77

#### 8601

Engineer's ball pein hammer





- › With hickory handle
- › In heat-treated steel as per EN 10083
- › Enamelled, face and ball ground

Code	No.	lbs 	
6764030	8601 1/4	1/4 lbs	0,172
6764110	8601 1/2	1/2 lbs	0,307
6764380	8601 3/4	3/4 lbs	0,475
6764460	8601 1	1 lbs	0,565
1429078	8601 1.1/8	1.1/8 lbs	0,5
6764540	8601 1.1/4	1.1/4 lbs	0,772
6764620	8601 1.1/2	1.1/2 lbs	0,8
1429108	8601 1.3/4	1.3/4 lbs	1,04
6764700	8601 2	2 lbs	1,073

#### E-8601

Spare handle hickory



Code	No.	l mm 	
1431056	E-8601 1/4	270	0,1
1431102	E-8601 1/2	290	0,225
1431110	E-8601 3/4	310	0,34
1431129	E-8601 1	325	0,45
1431137	E-8601 1.1/8	350	0,5
1431145	E-8601 1.1/4	350	0,6
1431153	E-8601 1.1/2	365	0,7
1431161	E-8601 1.3/4	400	0,8
1431188	E-8601 2	380	0,9







### 20 ST

Club hammer



- › Forged club hammer head
- › With steel tube handle and plastic grip
- › Extremely strong and robust




Code	No.	g 	↳ mm 	
<b>8640800</b>	20 ST-1000	1000	260	1,4

### 609 H

Sledge hammer  
ROTBAND-PLUS -  
The Original



- › Forged hammer head DIN 1042
- › Hickory handle DIN 5112, with additional long and hardened steel sleeve
- › ROTBAND-PLUS handle attachment, high safety, long life



Code	No.	g 	↳ mm 	
<b>8673220</b>	609 H-3	3000	600	3,755
<b>8673300</b>	609 H-3-90	3000	900	3,88
<b>8673490</b>	609 H-4	4000	700	4,94
<b>8673570</b>	609 H-4-90	4000	900	5,27
<b>8673650</b>	609 H-5	5000	800	6,035
<b>8673730</b>	609 H-5-90	5000	900	6,22
<b>8673810</b>	609 H-6	6000	800	7,045
<b>8674030</b>	609 H-6-90	6000	900	7,2
<b>8674110</b>	609 H-8	8000	900	9,185

### E 609 H

Spare handle  
ROTBAND-PLUS



- › Hickory handle DIN 5112
- › Steel sleeve, fixing plate, tapered collar and wood screw
- › For all hammer heads according to DIN 1042


Code	No.	↳ mm 	
<b>8681750</b>	E-609 H-3	600	0,77
<b>8681910</b>	E-609 H-4	700	0,84
<b>8683530</b>	E-609 H-5	800	1,12
<b>8683610</b>	E-609 H-8	900	1,39
<b>8740350</b>	E-609 H-6	800	0,9
<b>8740510</b>	E-609 H-3-90	900	0,99
<b>8747950</b>	E-609 H-6-90	900	1,1

### 9 E

Sledge hammer



- › Forged hammer head DIN 1042
- › With ash handle DIN 5135



Code	No.	g 	↳ mm 	
<b>8612000</b>	9 E-3	10000	600	3,33
<b>8612270</b>	9 E-5	5000	800	5,535

### E 9 E + E 9 H

Spare handle



- › Ash (No. E 9 E) or hickory handle (No. E 9 H)
- › Acc. to DIN 5112
- › Version -90 = 90 cm handle
- › With oval fixing hole




Code	No.	Spare handle for	↳ mm 	
<b>8613080</b>	E 9 E-3	9-3, 10-3, 17-3, 20-3	600	0,4
<b>8613240</b>	E 9 E-5	9-5, 9-6, 10-5, 10-6, 17-5, 17-6, 20-5, 20-6	800	0,73

### 9 F

Sledge hammer



- › Forged hammer head DIN 1042
- › Fiberglass handle with plastic grip and head protection

Code	No.	g 	↳ mm 	
<b>8614130</b>	9 F-3	3000	600	3,665
<b>8614210</b>	9 F-4	4000	700	4,93
<b>8614480</b>	9 F-5	5000	800	6,37
<b>8614560</b>	9 F-6	6000	800	7,165
<b>8614640</b>	9 F-8	8000	900	9,28

### 94 ST


Bricklayer's hammer  
Berlin pattern




- › With steel tube handle and plastic grip
- › Extremely strong and robust

Code	No.	g 	↳ mm 	
<b>8697240</b>	94 ST	600	270	0,891

# i ANTI-VIBRATION SYSTEM

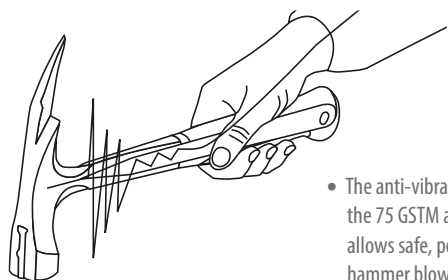

- The anti-vibration system of the 75 GSTM and 71 GSTM allows safe, powerful hammer blows

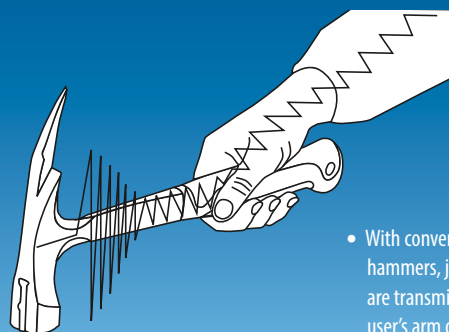

- With conventional all-steel hammers, jarring vibrations are transmitted through to the user's arm on every impact

## 75 GSTM

Carpenter's hammer



- › Head and handle forged in one piece, virtually unbreakable
- › Ergonomic 2-component handle
- › With magnetic nail holder

Code	No.	l mm	kg
1576143	75 GSTM	340	0,873

## 75 ST

Carpenter's hammer



- › With steel tube handle and plastic grip
- › Extremely strong and robust

Code	No.	Version/Execution	g	l mm	Handle length	kg
8688920	75 ST	without magnet	600	317	300	0,76
8689220	75 STM	with magnet	600	317	300	0,835

## 75 STKM

Carpenter's hammer with magnet



- › With steel tube handle, plastic grip and secured head
- › Extremely strong and robust

Code	No.	Version/Execution	g	l mm	Handle length	kg
8813090	75 STKM	with magnet	600	317	300	0,847

## E-251 H

Spare handle hickory 300 mm



Code	No.	l mm	kg
3126781	E-251 H	300	0,09

## 677 H

Scaling hammer  
ROT BAND-PLUS -  
The Original



- › Forged hammer head
- › ROT BAND-PLUS handle attachment, high safety, long life

Code	No.	g	l mm	kg
8671950	677 H	300	300	0,44
1822357	E-677 H-300		300	0,15



### 77 E

Scaling hammer



- > With ash handle  
DIN 5111
- > Spare handle No. E 4 E

Code	No.	g	mm	kg
<b>8588030</b>	E-4 E-300		300	0,099
<b>8690900</b>	77 E-300	330	300	0,39

### 77 ST

Scaling hammer



- > Acc. to DIN 5133
- > With steel tube handle

Code	No.	g	kg
<b>8691390</b>	77 ST-400	400	0,505

### 41 E

Scaling hammer



- > With ash handle  
DIN 5111

Code	No.	g	mm	kg
<b>8665390</b>	41 E-500	500	320	0,655

### 248 H

Recoilless hammer



- > With hickory handle
- > Splinter-proof,  
shatter-proof and  
wear-resistant  
polyamide heads,  
75 Shore D,  
tested to -20° C

Code	No.	mm	mm	kg
<b>8728220</b>	248 H-25	25 mm	305 mm	0,3
<b>8868230</b>	248 H-30	30 mm	330 mm	0,47
<b>8868310</b>	248 H-35	35 mm	335 mm	0,59
<b>8868580</b>	248 H-40	40 mm	360 mm	0,73
<b>8868660</b>	248 H-45	45 mm	365 mm	0,87
<b>8868740</b>	248 H-50	50 mm	370 mm	1,02
<b>8868820</b>	248 H-60	60 mm	370 mm	1,65
<b>8728300</b>	248 H-70	70 mm	370 mm	2,26
<b>8728490</b>	248 H-80	80 mm	880 mm	4,27
<b>8728570</b>	248 H-100	100 mm	1.000 mm	6,935

### E 248 H

Spare handle hickory



Code	No.	mm	kg
<b>8739690</b>	E 248 H-25	280	0,062
<b>8739770</b>	E 248 H-30-35	300	0,12
<b>8739850</b>	E 248 H-40-45	320	0,14
<b>8739930</b>	E 248 H-50	320	0,18
<b>8740000</b>	E 248 H-60-70	310	0,21
<b>8740190</b>	E 248 H-80	800	0,68
<b>8740270</b>	E 248 H-100	900	1,1

# i RECOILLESS HAMMERS

## YOUR ADVANTAGE

- Due to the special filling insert in the hammer head a considerably higher impact is made compared to standard engineers' and recoilless hammers
- Universal use for service and assembly work, with all the advantages of a recoilless hammer with higher impact
- "Dead blows" with no recoil reduce stress on muscles, nerves and wrists
- Lower cost due to universal use as an engineer's and recoilless hammer
- Recoilless hammers protect sensitive surfaces
- Each blow is more effective than standard safety hammers
- Available with hickory, tubular steel or fibreglass handles
- Exchangeable inserts, resistant to breakage or wear, made of modified polyamide

## FUNCTION

- The hollow hammer head is filled with steel shot. Small steel balls with a high carbon content.
- Workpiece "adhesion" and a "fully-felt" strike come from the practically 100% pulse transfer onto the workpiece.
- The impact (colloquial term for pulse) results principally from the kinetic energy of the fine-grained steel shot.
- The hammer head mass is slight compared to steel shot.
- That is why the counter pulse triggered by the hammer head is not felt.
- Bouncing blows are avoided.
- Goes easy on one's joints and tendons.



### 248 F Recoilless hammer



- › Nearly unbreakable fibreglass handle with plastic grip and secured head
- › Splinter-proof, shatter-proof and wear-resistant polyamide heads, 75 Shore D, tested to -20° C

Code	No.	Ø mm	l mm	kg
8724310	248 F-25	25 mm	290 mm	0,4
8867690	248 F-30	30 mm	305 mm	0,55
8867770	248 F-35	35 mm	310 mm	0,73
8867850	248 F-40	40 mm	315 mm	0,78
8867930	248 F-45	45 mm	320 mm	0,94
8868070	248 F-50	50 mm	325 mm	1,12
8868150	248 F-60	60 mm	335 mm	1,68

### 248 ST Recoilless hammer



- › With very robust and durable steel tube handle
- › Splinter-proof, shatter-proof and wear-resistant polyamide heads, 75 Shore D, tested to -20° C

Code	No.	Ø mm	l mm	kg
8724070	248 ST-25	25 mm	270 mm	0,44
8828950	248 ST-30	30 mm	290 mm	0,6
8829090	248 ST-35	35 mm	295 mm	0,7
8829170	248 ST-40	40 mm	300 mm	0,8
8829410	248 ST-45	45 mm	305 mm	0,95
8829250	248 ST-50	50 mm	310 mm	1,005
8829330	248 ST-60	60 mm	335 mm	1,8
8724150	248 ST-70	70 mm	335 mm	2,43


**E 248**

Polyamide spare head



- › Made of shatterproof, break and wear resistant polyamide, 75 Shore D, tested to -20° C

Code	No.	Ø mm	kg
<b>8747790</b>	E 248-20	20	0,01
<b>8747870</b>	E 248-25	25	0,01
<b>8830260</b>	E 248-30	30	0,015
<b>8830340</b>	E 248-35	35	0,021
<b>8830420</b>	E 248-40	40	0,031
<b>8829920</b>	E 248-45	45	0,04
<b>8830500</b>	E 248-50	50	0,052
<b>8830690</b>	E 248-60	60	0,09
<b>8748410</b>	E 248-70	70	0,13
<b>8748680</b>	E 248-80	80	0,19
<b>8748760</b>	E 248-100	100	0,35

**247 H**Combination hammer  
KOMBI-PLUS R

- › Reduced expense due to versatile use as an engineer's and recoilless hammer
- › With all advantages of a recoilless hammer with higher impact
- › Less energy necessary, easier working
- › With exchangeable splinter-proof, shatter-proof and wear-resistant polyamide head (E 247), 75 Shore D, tested to -20 °C

Code	No.	Ø mm	↳ mm	kg
<b>1603299</b>	247 H-30	30 mm	305 mm	0,46
<b>1603396</b>	247 H-35	35 mm	310 mm	0,69
<b>1687883</b>	247 H-40	40 mm	330 mm	0,84

**E 247 H**Spare handle Hickory  
KOMBI-PLUS R

- › Ergonomically shaped handle made from high-quality hickory
- › Extremely bend resistant and fail safe

Code	No.	↳ mm	kg
<b>1605313</b>	E 247 H-30	270	0,13
<b>1630709</b>	E 247 H-35	270	0,12
<b>1688014</b>	E 247 H-40	290	0,126

**E 247**spare head Polyamid  
(Piece) KOMBI-PLUS R

- › Made of shatterproof, break and wear resistant polyamide, 75 Shore D, tested to -20° C

Code	No.	Ø mm	kg
<b>1605305</b>	E 247-30	30	0,021
<b>1605380</b>	E 247-35	35	0,034
<b>1688022</b>	E 247-40	40	0,035

**224 E**

Plastic hammer



- › Interchangeable heads of impact-resistant cellulose acetate
- › With ash handle
- › 65 Shore D

Code	No.	Ø mm	↳ mm	Spare handle	kg
<b>8821270</b>	224 E-22	22	250	E 224 E-22	0,157
<b>8821350</b>	224 E-27	27	270	E 224 E-27	0,242
<b>8821430</b>	224 E-32	32	280	E 224 E-32	0,32
<b>8821510</b>	224 E-35	35	290	E 224 E-35	0,445
<b>8821780</b>	224 E-40	40	320	E 224 E-40	0,6
<b>8821860</b>	224 E-50	50	340	E 224 E-50	0,913
<b>8821940</b>	224 E-60	60	380	E 224 E-60	1,392

**E 224**

Plastic spare head



- Made of impact-resistant cellulose acetate
- 65 Shore D

Code	No.	Ø mm	kg
<b>8822590</b>	E 224-22	22	0,005
<b>8822670</b>	E 224-27	27	0,015
<b>8822750</b>	E 224-32	32	0,025
<b>8822830</b>	E 224-35	35	0,03
<b>8822910</b>	E 224-40	40	0,04
<b>8823050</b>	E 224-50	50	0,07
<b>8823130</b>	E 224-60	60	0,11

**E 224 E**

Spare handle ash



Code	No.	l mm	kg
<b>8823210</b>	E 224 E-22	250	0,06
<b>8823480</b>	E 224 E-27	270	0,06
<b>8823560</b>	E 224 E-32	280	0,08
<b>8823640</b>	E 224 E-35	290	0,08
<b>8823720</b>	E 224 E-40	320	0,1
<b>8824290</b>	E 224 E-50	340	0,1
<b>8824370</b>	E 224 E-60	380	0,115

**225 E**

Nylon hammer



- Exchangeable heads made from impact-resistant nylon
- With ash handle
- 60 Shore D

Code	No.	Ø mm	l mm	kg
<b>8805310</b>	225 E-22	22	250	0,16
<b>8805580</b>	225 E-27	27	270	0,25
<b>8805660</b>	225 E-32	32	280	0,35
<b>8805740</b>	225 E-35	35	290	0,42
<b>8805820</b>	225 E-40	40	320	0,58
<b>8805900</b>	225 E-50	50	340	0,9
<b>8806040</b>	225 E-60	60	380	1,34

**E 225**

Nylon spare head



- Made of impact resistant nylon
- 60 Shore D

Code	No.	Ø mm	kg
<b>8814220</b>	E 225-22	22	0,005
<b>8814300</b>	E 225-27	27	0,01
<b>8814490</b>	E 225-32	32	0,015
<b>8814570</b>	E 225-35	35	0,025
<b>8814650</b>	E 225-40	40	0,03
<b>8814730</b>	E 225-50	50	0,055
<b>8814810</b>	E 225-60	60	0,085

**226 E**

Rubber mallet hard



- Acc. to DIN 5128-90, 90 Shore A
- With 2 flat surfaces
- With ash handle

Code	No.	Ø mm	h mm	l mm	kg
<b>8825500</b>	226 E-0	40	80	260	0,21
<b>8825690</b>	226 E-1	55	90	320	0,37
<b>8825770</b>	226 E-2	65	115	340	0,63
<b>8825850</b>	226 E-2 A	65	115	340	0,578
<b>8825930</b>	226 E-3	75	130	380	0,99
<b>8826070</b>	226 E-4	90	140	380	1,15

**227 E**

Rubber mallet soft



- Acc. to DIN 5128-60, 60 Shore A
- With 2 flat surfaces
- With ash handle

Code	No.	Ø mm	h mm	l mm	kg
<b>8826740</b>	227 E-1	55	90	320	0,32
<b>8826820</b>	227 E-2	65	115	340	0,54
<b>8827040</b>	227 E-3	75	130	380	0,77
<b>8827120</b>	227 E-4	90	140	380	1,2

## E 226 E

Spare handle ash



Code	No.	l mm	kg
<b>8826230</b>	E-226 E-0	260	0,043
<b>8826310</b>	E-226 E-1	320	0,045
<b>8826580</b>	E-226 E-2	340	0,1
<b>8827200</b>	E-226 E-3	380	0,13
<b>8827390</b>	E-226 E-4	380	0,17

## 622 H

Copper hammer  
ROT BAND-PLUS



- › Club shape
- › With hickory handle as per DIN 5111, additionally shaped with a long hardened handle protective steel sleeve
- › ROT BAND-PLUS handle attachment, high safety, long life

Code	No.	g	l mm	kg
<b>8672410</b>	622 H-750	750	350	1,12
<b>8672680</b>	622 H-1000	1000	360	1,468
<b>8672760</b>	622 H-1500	1500	380	1,84
<b>8672840</b>	622 H-2000	2000	400	2,4
<b>1985094</b>	622 H-5	5000	800	6,15

## 37 E

Cold chisel hammer



- › For separating cold forgings
- › With ash handle

Code	No.	g	l mm	kg
<b>8663850</b>	37 E-1500	1500	600	1,81
<b>8663930</b>	E-37 E-1500		600	0,27

## 38 E

Hot chisel hammer



- › For separating warm forgings
- › With ash handle

Code	No.	g	l mm	kg
<b>8664310</b>	38 E-1500	1500	600	1,76

## 56 E

Drift punches




- › With ash handle
- › Induction tempered edges of the flat side of the head available on request
- › Can be supplied with rebound-dampened tubular steel handle

Code	No.	L	kg
<b>8679500</b>	56 E-10	600	1,01
<b>8679690</b>	56 E-15	600	1,48
<b>8679770</b>	56 E-20	600	1,77

## 108 UNI

Protective hand guard




- › Made from PVC
- › Highest safety for the hand in case of misses due to an enlarged and double protection plate
- › Avoids injuries of the hand

- › No rolling away (elliptical-shaped)
- › Jarring blows do not move into the hand
- › For all chisels from 250 mm length

Code	No.	oval	octagonal	kg
<b>8658500</b>	108 UNI	20 x 12	14	0,182
		23 x 13	16	
		26 x 13	18	
		26 x 7	20	


97

Flat cold chisel  
octagonal

- > GEDORE vanadium steel
- > Striking heads inductively tempered

Code	No.	L	a	s	
<b>8703820</b>	97-125	125	12,0	10	0,069
<b>8703900</b>	97-150	150	16,0	12	0,13
<b>8704120</b>	97-200	200	22,0	18	0,38

95


Flat cold chisel  
flat oval

- > Acc. to DIN 6453
- > Vanadium Steel
- > Striking heads inductively tempered

\* not standardised

Code	No.	L	a	b	h	
<b>8698560</b>	95-100	100	15,0	14	9	0,075
<b>8698640</b>	95-125	125	15,0	14	9	0,1
<b>8698720</b>	95-150	150	18,0	17	11	0,19
<b>8698800</b>	95-175	175	21,0	20	12	0,28
<b>8698990</b>	95-200	200	24,0	23	13	0,39
<b>8699610*</b>	95-225	225	24,0	23	13	0,46
<b>8699100*</b>	95-250	250	28,0	26	13	0,57
<b>8699020</b>	95-253	250	25,0	23	13	0,5
<b>8699370*</b>	95-300	300	30,0	26	13	0,71
<b>8699290</b>	95-303	300	26,0	23	13	0,604
<b>8699450*</b>	95-400	400	30,0	26	13	0,95
<b>8699530*</b>	95-500	500	30,0	26	13	1,16

104


Splitting chisel  
flat

- > Vanadium Steel
- > Forged pattern
- > Striking heads inductively tempered
- > No. 104 HS with hand protection handle No. 108 UNI

Code	No.	L	a	b	h	
<b>8723850</b>	104	240	26,0	26	7	0,26
<b>8723930</b>	104 HS	240	26,0	26	7	0,4
<b>8724230</b>	104 P	240	26,0	26	7	0,29

2104


Splitting chisel



- > Chrome-vanadium steel
- > Striking heads inductively tempered

Code	No.	L	a	b	h	
<b>8911420</b>	2104	240	26,0	26	4	0,198

103

Brick cutting chisel  
flat oval


- > With broad blade to chisel joints into walls, plaster, tiles, etc.
- > Vanadium Steel
- > Striking heads inductively tempered

Code	No.	L	a	b	h	
<b>8723420</b>	103-50	250	50,0	26	13	0,532
<b>8723500</b>	103-60	250	60,0	26	13	0,557
<b>8723690</b>	103-80	250	80,0	26	13	0,558



### 109

Bricklayer's chisel  
flat oval




- > Acc. to DIN 7254 Form A
- > Vanadium Steel
- > Striking heads inductively tempered

Code	No.	L	a	b	h	
8728650	109-200	200	26,0	20	12	0,32
8728730	109-250	250	26,0	20	12	0,4
8728810	109-300	300	29,0	23	13	0,61
8729030	109-350	350	29,0	23	13	0,71

### 110

Bricklayer's chisel  
octagonal




- > Acc. to DIN 7254 Form B
- > Vanadium Steel
- > Striking heads inductively tempered

Code	No.	L	a	s	
8731280	110-216	200	23,0	16	0,3
8731440	110-256	250	23,0	16	0,39
8731600	110-316	300	23,0	16	0,46
8731790	110-318	300	26,0	18	0,6
8731870	110-358	350	26,0	18	0,7
8731950	110-418	400	26,0	18	0,81
8732090	110-420	400	30,0	20	0,99

### 110 HS

Bricklayer's chisel  
octagonal



- > Acc. to DIN 7254 Form B
- > 104 P with plastic grip
- > Vanadium Steel
- > Striking heads inductively tempered

Code	No.	L	a	s	
8732680	110 HS-256	250	23,0	16	0,51
8733140	110 HS-318	300	26,0	18	0,72

### 111

Point chisel  
octagonal




- > Acc. to DIN 7256
- > Vanadium Steel
- > Striking heads inductively tempered

Code	No.	L	s	
8741240	111-256	250	16	0,37
8741400	111-316	300	16	0,444
8741590	111-318	300	18	0,576

### 112

Electricians' chisel  
square



- > Chrome-vanadium steel
- > Striking heads inductively tempered

Code	No.	L	a	b	
8744500	112-2006	200	6,0	6	0,054
8744690	112-2008	200	8,0	6	0,054
8744770	112-2100	200	10,0	7	0,073
8744930	112-2508	250	8,0	6	0,068
8745070	112-2510	250	10,0	7	0,091
8745150	112-2512	250	12,0	8	0,119
8745310	112-3000	300	15,0	10	0,227


### 112 S

Electricians' splitting  
chisel




- > GEDORE vanadium steel
- > Striking heads inductively tempered

Code	No.	L	a	
8746550	112 S	200	26,8	0,228

**96**Cross cut chisel  
flat oval

- > Acc. to DIN 6451
- > Vanadium Steel
- > Striking heads inductively tempered

Code	No.	L	a	b	h	
<b>8702180</b>	96-125	125	5,0	14	9	0,098
<b>8702260</b>	96-150	150	6,0	17	11	0,17
<b>8702340</b>	96-175	175	7,0	17	11	0,21
<b>8702420</b>	96-200	200	8,0	20	12	0,29
<b>8702500</b>	96-250	250	9,0	23	13	0,46

**98**Cross cut chisel  
octagonal


- > Vanadium steel
- > Striking heads inductively tempered

Code	No.	L	a	s	
<b>8704630</b>	98-125	125	5,0	10	0,066

**129**Grooving chisel  
octagonal


- > Acc. to DIN 6455
- > Vanadium Steel
- > Striking head inductively tempered

Code	No.	L	a	s	
<b>8776460</b>	129-3	150	3,0	10	0,07

**99**Drift punches  
octagonal

- > Acc. to DIN 6458
- > GEDORE vanadium steel
- > Striking heads inductively tempered
- > Special sizes available on request
- \* not standardised**

Code	No.	d	L	s	
<b>8708700</b>	99 10-1	1	120	10	0,06
<b>8708970</b>	99 10-2	2	120	10	0,061
<b>8709190</b>	99 10-3	3	120	10	0,063
<b>8709350</b>	99 10-4	4	120	10	0,065
<b>8709510</b>	99 10-5	5	120	10	0,063
<b>8710950</b>	99 12-3	3	120	12	0,088
<b>8711170</b>	99 12-4	4	120	12	0,086
<b>8711330</b>	99 12-5	5	120	12	0,091
<b>8711410</b>	99 12-6	6	120	12	0,094
<b>8711680</b>	99 12-7	7	120	12	0,096
<b>8711760</b>	99 12-8	8	120	12	0,099
<b>8711920*</b>	99 12-10	10	120	12	0,103

**100**Centre punch  
octagonal

- > Acc. to DIN 7250
- > Vanadium Steel
- > Striking heads inductively tempered

Code	No.	d	L	s	
<b>8721050</b>	100-10	4	120	10	0,063
<b>8721130</b>	100-12	5	120	12	0,091
<b>8721210</b>	100-15	5	150	12	0,119
<b>8721480</b>	100-16	8	150	16	0,216

## 100 A

Centre punch  
8-edge, with carbide tip



> Vanadium Steel

Code	No.	L	s	d	
<b>8721720</b>	100 A-10	120	10	4	0,063
<b>1568396</b>	100 A-12	130	12	4	0,089

## 101

Automatic centre punch  
with tip




- > For one hand operation
- > Automatic impact release by spring mechanism
- > Impact power infinitely adjustable between 60 - 130 N

Code	No.	L	s	d	
<b>3081214</b>	E-101	99		4	0,01
<b>8722880</b>	101	130	14	4	0,145

## 119

Pin punch  
octagonal



- > Acc. to DIN 6450
  - > GEDORE vanadium steel
  - > Striking heads inductively tempered
  - > Special sizes available on request
- \* not standardised**

Code	No.	d	L1	L2	s	
<b>2004658*</b>	119-1,5	1,5	110	30	8	0,061
<b>8758640</b>	119-2	2	150	30	10	0,07
<b>8758720*</b>	119-2,5	2,5	150	30	10	0,069
<b>8758800</b>	119-3	3	150	40	10	0,071
<b>8758990*</b>	119-3,5	3,5	150	40	10	0,072
<b>8759020</b>	119-4	4	150	50	10	0,061
<b>8856220*</b>	119-4,5	4,5	150	50	10	0,065
<b>8759290</b>	119-5	5	150	50	10	0,068
<b>8759370</b>	119-6	6	150	50	10	0,073
<b>8759450*</b>	119-7	7	150	50	12	0,103
<b>8759530</b>	119-8	8	150	50	12	0,109
<b>8759610*</b>	119-9	9	150	50	12	0,115
<b>8759880</b>	119-10	10	150	50	12	0,123
<b>8759960</b>	119-12	12	150	50	14	0,17
<b>8859670</b>	119-14	14	180	80	16	0,237
<b>8761350</b>	119-175	6	175	85	10	0,07

## 115

Pin punch set  
8 pieces



- > In metal case with lid
- > With movable guide sleeve, -59 with fix guide sleeve
- > Insert made of material 115CrV3, hardness 55 - 59 HRC

Code	No.	Contents	Pieces	
<b>8756780</b>	115	114-09 -14 -18 -24 -28 -34 -39 -59	8	0,35

## 116

Pin punch set  
6 pieces



- > Chrome-vanadium steel
- > Striking heads inductively tempered

Code	No.	Contents	Execution
<b>8757670</b>	116 A	119-3 -4 -5 -6 -7 -8	PVC holder
<b>8758050</b>	116 D	119-3 -4 -5 -6 -7 -8	Metal folding box
<b>8839990</b>	116 L	119-2 -3 -5 -175 -175-4 -175-6	

### 119 L

Pin punch set  
6 pieces



- > Vanadium Steel
- > Striking heads inductively tempered
- > In PVC holder
- > Long pattern: 175 mm

Code	No.	Contents	Execution
<b>8866290</b>	119 L	119-175-4 175-5 175-6 175-7 175-8 175-10	PVC holder

### 113

Drift punch set  
6 pieces



- > GEDORE Vanadium steel
- > Striking heads inductively tempered

Code	No.	Contents	Execution
<b>8753680</b>	113	99 10-1 2 3 99 12-4 5 100-10	PVC holder
<b>8754060</b>	113 D	99 10-1 2 3 99 12-4 5 100-10	Metal case with lid

### 106

Tool set  
6 pieces



- > Vanadium Steel
- > Striking heads inductively tempered

Code	No.	Contents	Execution
<b>8725200</b>	106	97-125 150 98-125 99 12-3 100-10 119-4	PVC holder
<b>8725710</b>	106 D	97-125 150 98-125 99 12-3 100-10 119-4	Metal case with lid

### 90 HS

Rivet setter  
octagonal



- > Vanadium steel, galvanized
- > Striking heads inductively tempered

Code	No.	L	s	
<b>8885830</b>	90 HS-4	170	18	0,488

### 208

Carbide scriber  
hexagon



- > Chrom-vanadium-steel 59CrV4
- > zinc-plated

Code	No.	↳ mm ↲	mm	
<b>8881680</b>	208-150	150	6	0,04

**125 B**

rivet extractor and  
rivet head maker set  
6 pieces



- › GEDORE vanadium steel
- › Hardened according to DIN 7255
- › In PVC holder

Code	No.	Contents	Pieces	
<b>8773600</b>	125 B	126-2 3 4 127-2 3 4	6	0,47

**135**

Setting punch



- › Vanadium Steel
- › Special sizes available on request

Code	No.	d	L	c	s	
<b>8782350</b>	135-5	5	180	110	12	0,11
<b>8782430</b>	135-6	6	200	120	13	0,15
<b>8782510</b>	135-8	8	200	130	16	0,225
<b>8782780</b>	135-9	9	200	130	20	0,34
<b>8782860</b>	135-10	10	230	140	22	0,49
<b>8782940</b>	135-11	11	250	155	25	0,62
<b>8783080</b>	135-12	12	280	170	27	0,89
<b>8783160</b>	135-14	14	315	190	30	1,25
<b>8783240</b>	135-15	15	340	200	32	1,555
<b>8783320</b>	135-16	16	380	220	36	2,19

**136-500**

Taper punch  
octagonal



- › Vanadium Steel

Code	No.	L	c	d	s	
<b>8783400</b>	136-500	500	170,0	5	20	1,05

**137-600**

Bending bar



- › Vanadium Steel

Code	No.	L	c	d	s	
<b>8783590</b>	137-600	600	120,0	5	20	1,305

**138-400**

Bending tool, hex



- › Vanadium steel, galvanized

Code	No.	↳ mm ↲	mm	d	
<b>1396609</b>	138-400	400	23,0	17	0,645

**139-400**

Prybar



- › For hand operated levering, bending and centering of components
- › Suitable for galvanized components
- › Power saving through rolling head
- › Chrome vanadium steel 31CrV3, galvanised

Code	No.	↳ mm ↲	Ø	
<b>1396595</b>	139-400	400	14	0,48

**140-380**

Universal prybar



- › Made of special steel, through hardened
- › Cutting edge polished
- › With 3 nail pullers

Code	No.	l mm	mm	
<b>8894310</b>	140-380	380	42,0	0,65

**141**

Prybar



- › Vanadium steel, chromated
- › Carefully hardened along the full length
- › Ergonomic PVC handle
- › Very robust and resilient

Code	No.	l mm	mm	s	
<b>1471945</b>	141-300	300	15,0	12	0,23
<b>1471937</b>	141-390	390	15,0	12	0,39
<b>1471929</b>	141-600	600	15,0	12	0,785

**S 141-3**Prybar set  
3 pieces

- › Vanadium steel, chromated
- › Carefully hardened along the full length
- › Ergonomic PVC handle
- › Very robust and resilient

Code	No.	Contents	Pieces	
<b>1525476</b>	S 141-3	141-300 390 600	3	1,474

**142-430**

Aluminium prybar



- › Made from high quality aluminium
- › Extremely light and very robust
- › For universal use - with pry and tip

Code	No.	l mm	mm	
<b>1859188</b>	142-430	430	26,0	0,405

**120**

Wrecking bar



- › Made of special steel

Code	No.	l mm	Shaft diameter	
<b>8769330</b>	120-350	350	18	0,84
<b>8769410</b>	120-500	500	18	1,15
<b>8769680</b>	120-600	600	18	1,355
<b>8769760</b>	120-700	700	18	1,55
<b>8769840</b>	120-800	800	18	1,77
<b>8769920</b>	120-1000	1.000	18	2,175

[WWW.GEDORE.COM](http://WWW.GEDORE.COM)