

SCREWDRIVERS

The perfect twist: The tightening and loosening of screws is probably one of the most frequent tasks in everyday work. It is therefore all the more important to have a great screwdriver at hand.

GEDORE screwdrivers cover everything from classic slotted and cross-slotted to TX and hexagon allen keys. However, it is not only the product range that is important. It is the composition and quality of the components such as handle, blade and drive make the difference.

Maximum force with minimum effort: This is ensured by ergonomic 3-component handles. Together with the precisely manufactured blade tips, which optimally transfer the torque to the screw head, giving an unbeatable combination.

The GEDORE screwdriver-range offers some special features such as specific lengths, impact caps or ball heads. The GEDORE SilentGEAR stands for extraordinary design performance. The ratchet screwdriver makes a significant change to the way screws are tightened and loosened with its stepless and silent ratchet mechanism.



- The output of the screwdrivers is marked with a pictogram on the head.
- For targeted, quick access to the appropriate screwdriver





POWERFUL PRECISE

TORQUE PINPOINT

- Wide range of screwdrivers for all applications
- Available individually or in practical sets
- Optimised components for best possible results and torque transmission



ERGONOMIC 3-C HANDLES

- Optimal power transmission due to soft quick-turn zone and power point inside the handle
- Ergonomic feel with large contact surface for the hand
- Suitable for small and large hands, right- and left-handers alike



TEMPERED BLADE

- Blade from GEDORE molybdenum-vanadium-plus tempered steel for hardness, elasticity and resistance to wear
- Blade fully tempered for a long service life
- Blade injected as a positive fit into the plastic core and matt chrome-plated
- For optimum power transmission to the screw head

Screwdriver

2150 3C-Screwdriver for slotted head screws



- › Acc. to DIN ISO 2380-2, cutting edge according to DIN ISO 2380-1 Form A
- › Ergonomic 3-component handle Power-Grip³ for maximum power transmission with minimum stress on the hand
- › hanging hole on handle for space-saving storage
- › Type of drive marked at end of the handle

* **not standardised**

Code	No.	⊖	mm	mm	
6679270*	2150 3	3,0	80	165	0,03
2822644	2150 3,5	3,5	75	160	0,055
6679350*	2150 4	4,0	100	185	0,061
2822652	2150 4,5	4,5	90	190	0,1
6679430	2150 5,5	5,5	100	200	0,093
6679510	2150 6,5	6,5	150	260	0,128
6679780	2150 8	8,0	150	270	0,17
2822660	2150 8-175	8,0	175	295	0,222
6679860	2150 10	10,0	200	320	0,203
2822679*	2150 10-300	10,0	300	420	0,222
6679940	2150 12	12,0	200	320	0,257
2822687	2150 12-250	12,0	250	370	0,222

2150 3C-Screwdriver for slotted head screws, special lengths



- › Acc. to DIN ISO 2380-2, cutting edge according to DIN ISO 2380-1 Form B
- › Ergonomic 3-component handle Power-Grip³ for maximum power transmission with minimum stress on the hand
- › hanging hole on handle for space-saving storage
- › Type of drive marked at end of the handle

* **not standardised**

Code	No.	⊖	mm	mm	
2822695*	2150 2-60	2,0	60	145	0,055
2822709	2150 2,5-75	2,5	75	160	0,055
6680280*	2150 3-150	3,0	150	235	0,044
2822717*	2150 3-200	3,0	200	285	0,055
2822725	2150 3,5-100	3,5	100	185	0,055
2822733	2150 3,5-125	3,5	125	210	0,055
2822741*	2150 3,5-200	3,5	200	285	0,055
6680360*	2150 4-150	4,0	150	235	0,069
2822768*	2150 4-200	4,0	200	285	0,055
2822776*	2150 4-300	4,0	300	385	0,055
2822784	2150 5,5-125	5,5	125	225	0,1
6680520	2150 5,5-150	5,5	150	250	0,104
2822792*	2150 5,5-200	5,5	200	300	0,1
2822806*	2150 5,5-300	5,5	300	400	0,1
2822814*	2150 6-100	6,0	100	210	0,14
6680870*	2150 6,5-200	6,5	200	310	0,152

2153 3C-Screwdriver for slotted head screws, short pattern



- › Acc. to DIN ISO 2380-2A, cutting edge according to DIN ISO 2380-1 Form B
- › Especially suitable for work in confined spaces
- › Ergonomic 3-component handle Power-Grip³ for maximum power transmission with minimum stress on the hand
- › hanging hole on handle for space-saving storage
- › Type of drive marked at end of the handle

Code	No.	⊖	mm	mm	
1531174	2153 4	4,0	25	81	0,031
1482432	2153 5,5	5,5	25	81	0,036
1531182	2153 6,5	6,5	25	81	0,039
1531190	2153 8	8,0	25	81	0,044

2160 PH

3C-Screwdriver
for cross-head screws
PH



- > Acc. to DIN ISO 8764, tip according to DIN ISO 8764-1 PH
- > Ergonomic 3-component handle Power-Grip³ for maximum power transmission with minimum stress on the hand
- > hanging hole on handle for space-saving storage
- > Type of drive marked at end of the handle

*** not standardised**

Code	No.	⊕ PH	mm	mm	
6683110	2160 PH 0	0	60	145	0,302
2824043*	2160 PH 0-100	0	100	185	0,055
6683380	2160 PH 1	1	80	180	0,08
2824051*	2160 PH 1-100	1	100	200	0,1
6683700	2160 PH 1-200	1	200	300	0,166
6683460	2160 PH 2	2	100	210	0,119
2824078*	2160 PH 2-150	2	150	260	0,14
6683890	2160 PH 2-200	2	200	310	0,164
6683540	2160 PH 3	3	150	270	0,192
6683620	2160 PH 4	4	200	320	0,274

2160 PZ

3C-Screwdriver
for cross-head screws
Pozi PZ



- > Acc. to DIN ISO 8764, tip according to DIN ISO 8764-1 PZ
- > Ergonomic 3-component handle Power-Grip³ for maximum power transmission with minimum stress on the hand
- > hanging hole on handle for space-saving storage
- > Type of drive marked at end of the handle

*** not standardised**

Code	No.	PZ	mm	mm	
6683970	2160 PZ 0	0	60	145	0,038
6684000	2160 PZ 1	1	80	180	0,079
2824086*	2160 PZ 1-300	1	300	400	0,1
6684190	2160 PZ 2	2	100	210	0,119
2824094*	2160 PZ 2-300	2	300	410	0,14
6684270	2160 PZ 3	3	150	270	0,189
6684350	2160 PZ 4	4	200	320	0,273

2161 PH

3C-Screwdriver
for cross-head screws PH, short



- > Acc. to DIN ISO 8764, tip according to DIN ISO 8764-1 PH
- > Ergonomic 3-component handle Power-Grip³ for maximum power transmission with minimum stress on the hand

- > hanging hole on handle for space-saving storage
- > Type of drive marked at end of the handle

Code	No.	⊕ PH	mm	mm	
1482440	2161 PH 1	1	25	81	0,033
1531204	2161 PH 2	2	25	81	0,036

2161 PZ

3C-Screwdriver
for cross-head screws Pozi PZ, short pattern



- > Acc. to DIN ISO 8764, tip according to DIN ISO 8764-1 PZ
- > Ergonomic 3-component handle Power-Grip³ for maximum power with minimum effort

- > hanging hole on handle for space-saving storage
- > Type of drive marked at end of the handle

Code	No.	PZ	mm	mm	
1550608	2161 PZ 1	1	25	81	0,032
1550616	2161 PZ 2	2	25	81	0,037





Screwdriver

2163 K

3C-Screwdriver
for in-hex screws,
ball end



- › Ergonomic 3-component handle Power-Grip³ for maximum power with minimum effort
- › With hanging hole on handle for space-saving storage
- › Type of drive marked at end of the handle
- › Working angle approx. 25° in each direction





Code	No.				
1828746	2163 K 2	2	100	185	0,04
6684430	2163 K 3	3	100	185	0,045
6684510	2163 K 4	4	100	185	0,068
6684780	2163 K 5	5	100	200	0,1
6684860	2163 K 6	6	125	235	0,139
6684940	2163 K 8	8	150	270	0,23
6685080	2163 K 10	10	150	270	0,285
6685160	2163 K 12	12	150	270	0,369

2163 TX

3C-Screwdriver
for recessed TX
head screws



- › Ergonomic 3-component handle Power-Grip³ for maximum power with minimum effort
- › With hanging hole on handle for space-saving storage
- › Type of drive marked at end of the handle





Code	No.				
1616471	2163 TX T5	T5	60	145	0,037
6685400	2163 TX T6	T6	60	145	0,029
6685590	2163 TX T7	T7	60	145	0,038
6685670	2163 TX T8	T8	60	145	0,038
6685750	2163 TX T9	T9	60	145	0,038
6685830	2163 TX T10	T10	80	165	0,039
6685910	2163 TX T15	T15	80	165	0,054
6686050	2163 TX T20	T20	100	185	0,06
6686130	2163 TX T25	T25	100	200	0,082
6686210	2163 TX T27	T27	115	215	0,098
6686480	2163 TX T30	T30	115	225	0,123
6686560	2163 TX T40	T40	130	240	0,144
6686640	2163 TX T45	T45	130	250	0,176

2163 KTX

3C-Screwdriver
for recessed TX screws,
with ball end



- › Ergonomic 3-component handle Power-Grip³ for maximum power with minimum effort
- › With hanging hole on handle for space-saving storage
- › Type of drive marked at end of the handle
- › Working angle approx. 25° in each direction

Code	No.				
2824213	2163 KTX T10	T10	80	165	0,055
2824221	2163 KTX T15	T15	80	165	0,055
2824248	2163 KTX T20	T20	100	185	0,055
2824256	2163 KTX T25	T25	100	200	0,1
2824264	2163 KTX T27	T27	115	215	0,1
2824272	2163 KTX T30	T30	115	225	0,14
2824280	2163 KTX T40	T40	130	240	0,14

2163 TXIP

3C-Screwdriver
for recessed TX PLUS®
head screws



- › Ergonomic 3-component handle Power-Grip³ for maximum power with minimum effort
- › With hanging hole on handle for space-saving storage
- › Type of drive marked at end of the handle
- › TORQ-SET® is a registered trademark of Phillips Screw Company, USA
- › TX PLUS® = reg. trademark of Acument Intellectual Properties, LLC. USA

Code	No.				
2824299	2163 TX 6IP	6IP	60	145	0,055
2824302	2163 TX 7IP	7IP	60	145	0,055
2824310	2163 TX 8IP	8IP	60	145	0,055
2824329	2163 TX 9IP	9IP	60	145	0,055
2824337	2163 TX 10IP	10IP	80	165	0,055
2824345	2163 TX 15IP	15IP	80	165	0,055
2824353	2163 TX 20IP	20IP	100	185	0,055
2824361	2163 TX 25IP	25IP	100	200	0,1
2824388	2163 TX 27IP	27IP	115	215	0,1
2824396	2163 TX 30IP	30IP	115	225	0,14
2824418	2163 TX 40IP	40IP	130	240	0,14

2163 TXB

3C-Screwdriver
for recessed TX head
screws with pilot




- › Ergonomic 3-component handle Power-Grip³ for maximum power with minimum effort
- › With hanging hole on handle for space-saving storage
- › Type of drive marked at end of the handle

Code	No.			
6677570	2163 TXB T7	T7	145	0,034
6677650	2163 TXB T8	T8	145	0,038
6677730	2163 TXB T9	T9	145	0,038
6677810	2163 TXB T10	T10	165	0,055
2824159	2163 TXB T10-300	T10-300	385	0,055
6678030	2163 TXB T15	T15	165	0,054
2824167	2163 TXB T15-300	T15-300	385	0,055
6678110	2163 TXB T20	T20	185	0,06
2824175	2163 TXB T20-300	T20-300	385	0,055
6678380	2163 TXB T25	T25	200	0,082
6678460	2163 TXB T27	T27	215	0,098
6678540	2163 TXB T30	T30	225	0,123
6678620	2163 TXB T40	T40	240	0,143

2133

Socket wrench
with 3C-handle




- › Acc. to DIN 3125, ISO 2725-1
- › Ergonomic 3-component handle Power-Grip³ for maximum power with minimum effort
- › With hanging hole on handle for space-saving storage
- › From 10 mm with drive hexagon

Code	No.		L1	L2	d		
1746723	2133 5	5,0	225	125	8		0,097
1746731	2133 5,5	5,5	225	125	8		0,107
1746758	2133 6	6,0	225	125	9		0,109
1746766	2133 7	7,0	235	125	11		0,135
1746855	2133 8	8,0	235	125	12		0,152
1746863	2133 9	9,0	235	125	13		0,168
1746898	2133 10	10,0	245	125	14	10	0,198
1746901	2133 11	11,0	245	125	16	13	0,202
1746928	2133 12	12,0	245	125	17	13	0,221
1746944	2133 13	13,0	245	125	18	13	0,225

Screwdriver

2150-2160 PH

3C-Screwdriver set
6 pieces / 10 pieces




- > For slotted and cross-head screws PH
- > Ergonomic 3-component handle Power-Grip³ for maximum power with minimum effort

- > With hanging hole on handle for space-saving storage
- > Type of drive marked at end of the handle

Code	No.	Contents	Pieces	
1482319	2150-2160 PH-06	3C screwdriver bit socket slotted no. 2150, 4 5.5 6.5 8 mm 3C screwdriver cross-slotted No. 2160 PH, 1 2	6	0,66
1482343	2150-2160 PH-010	3C screwdriver bit, slotted No. 2150 5.5 6.5 8, 3C screwdriver, cross recess No. 2160 PH 1 2, Phase tester 3.5	10	0,825

2160 PHZ-06

3C-Screwdriver set
6 pieces



- > for cross-head screws PH and PZ
- > Ergonomic 3-component handle Power-Grip³ for maximum power with minimum effort

- > hanging hole on handle for space-saving storage
- > Type of drive marked at end of the handle

Code	No.	Contents	Pieces	
2003589	2160 PHZ-06	2160 PH 0 1 2 2160 PZ 0 1 2	6	0,344

2150-2160 PZ-06

3C-Screwdriver set
6 pieces



- > For slotted and cross-head screws PZ
- > Ergonomic 3-component handle Power-Grip³ for maximum power with minimum effort

- > hanging hole on handle for space-saving storage
- > Type of drive marked at end of the handle

Code	No.	Contents	Pieces	
1482300	2150-2160 PZ-06	2150 4,5,5 6,5 8 2160 PZ 1 2	6	0,67

2163 TX


3C-Screwdriver set
5 pieces / 10 pieces



- > for recessed TX head screws
- > Ergonomic 3-component handle Power-Grip³ for maximum power with minimum effort

- > hanging hole on handle for space-saving storage
- > Type of drive marked at end of the handle

Code	No.	Contents	Pieces	
1482327	2163 TX-05	2163 TX T10 T15 T20 T25 T30	5	0,435
1482335	2163 TX-010	2163 TX T7 T8 T9 T10 T15 T20 T25 T27 T30 T40	10	0,74

2163 TXB-053C-Screwdriver set
5 pieces

- > for recessed TX head screws with pilot
- > Ergonomic 3-component handle Power-Grip³ for maximum power with minimum effort

- > hanging hole on handle for space-saving storage
- > Type of drive marked at end of the handle

Code	No.	Contents	Pieces	
1616617	2163 TXB-05	2163 TXB T10 T15 T20 T25 T30	5	0,44

2142 T-008Hexagon allen key set
8 pieces

- > 2-component wing grip for high torque when loosening or tightening

- > Extended wing provides optimal support for the ball of the hand

Code	No.	Contents	Pieces	
3037428	2142 T-008	2142 T2,5 3 4 5 6 8 10	8	0,97

DT 2142-008

Hexagon allen key set 8 pcs



- > for in-hex screws
- > With two hexagons, same size each end
- > Long blade with ball end
- > 2-component wing grip for high torque when loosening or tightening

- > Extended wing provides optimal support for the ball of the hand

Code	No.	Contents	Pieces	
3037371	DT 2142-008	Offset screwdriver with 2CT-handle No. DT 2142, 2 2.5 3 4 5 6 8 10 mm	8	0,97

2142 TX-007Screwdriver set TX
7 pieces


- > T-handle screwdriver for special screw-tightening that require great force

Code	No.	Contents	Pieces	
3037401	2142 TX-007	2142 TX T10 T15 T20 T25 T27 T30 T40	7	0,67

Screwdriver

2154SK

3C-Screwdriver
with striking cap
for slotted head screws



- > Acc. to DIN ISO 2380-2, cutting edge according to DIN ISO 2380-1 Form A
- > Ergonomic 3-component handle Power-Grip³ for maximum power with minimum effort
- > hanging hole on handle for space-saving storage
- > Hexagon blade with additional hexagon bolster

*** not standardised**

Code	No.		mm	mm	mm	
1845209	2154SK 3,5	3,5	8,0	75	180	0,086
1845217*	2154SK 4,5	4,5	8,0	75	180	0,09
1845225	2154SK 5,5	5,5	8,0	100	205	0,092
1845233	2154SK 6,5	6,5	10,0	125	230	0,154
2824108	2154SK 6,5-150	6,5	10,0	150	255	0,229
2824116	2154SK 7	7,0	10,0	125	230	0,229
1845241	2154SK 8	8,0	13,0	150	270	0,178
2824124	2154SK 8-175	8,0	13,0	175	295	0,229
1845268	2154SK 10	10,0	13,0	200	320	0,214
2824132	2154SK 10-300	10,0	13,0	300	420	0,229
1845276	2154SK 12	12,0	16,0	200	320	0,26
2824140	2154SK 12-250	12,0	16,0	250	370	0,229
1845284	2154SK 14	14,0	16,0	250	370	0,324

2160SK PH

3C-Screwdriver with striking cap
for cross-head screws PH



- > Acc. to DIN ISO 8764, tip according to DIN ISO 8764-1 PH
- > Ergonomic 3-component handle Power-Grip³ for maximum power with minimum effort

- > hanging hole on handle for space-saving storage
- > Hexagon blade with additional hexagon bolster

Code	No.	PH	mm	mm	mm	
1845292	2160SK PH 1	1	8,0	80	185	0,086
1845306	2160SK PH 2	2	10,0	100	205	0,148
1845314	2160SK PH 3	3	13,0	150	270	0,204
1845322	2160SK PH 4	4	16,0	200	320	0,292

2160SK PZ

3C-Screwdriver with striking cap
for cross-head screws Pozzi PZ



- > Acc. to DIN ISO 8764, tip according to DIN ISO 8764-1 PZ
- > Ergonomic 3-component handle Power-Grip³ for maximum power with minimum effort

- > hanging hole on handle for space-saving storage
- > Hexagon blade with additional hexagon bolster

Code	No.	PZ	mm	mm	mm	
1845330	2160SK PZ 1	1	8,0	80	185	0,086
1845349	2160SK PZ 2	2	10,0	100	205	0,148
1845357	2160SK PZ 3	3	13,0	150	270	0,206

SK 2154 PH-06

3C-Screwdriver set with striking cap
6 pieces



- > For firmly seated slotted and cross-head screws PH
- > Hexagon blade with additional hexagon bolster

- > Ergonomic 3-component handle Power-Grip³ for maximum power with minimum effort
- > hanging hole on handle for space-saving storage

Code	No.	Contents	Pieces	
1878743	SK 2154 PH-06	2154SK 4.5 5.5 6.5 8 mm 2160SK PH 12 mm	6	0,88

164 IN

Elektronik Screwdriver
for in-hex screws



- > 2-component handle in ergonomic design
- > Rotatable end cap with micro-anti-slip surface
- > Colour coding of the drive type

Code	No.				
1845063	164 IN 0,7	0,7	60	155	0,018

i 2C-T-HANDLE

2-component wing handle for high torque level when loosening or tightening. The lengthened wing provides an optimum contact surface for the palm of one's hand. It thus easily transfers considerable forces in a relaxed hand's position.



1

SOFT COMPONENT MADE OF THERMOPLASTIC ELASTOMER

2


WITH HANGING HOLE

3


HARD COMPONENT MADE OF FIBREGLASS REINFORCED PLASTIC WITH SPECIAL-PURPOSE GLASS FIBRES. THE BENEFITS OF SHORT GLASS FIBRES (RIGIDITY AND FIRMNESS) ARE COMBINED WITH THAT OF LONG GLASS FIBRES (IMPACT STRENGTH).

WITH T-SHAPED CROSS-SECTION:

broad at the top and slender below. In this way one's hand takes on a firm grip leading to vigorous working over an extended period without any fatigue.




Soft zones where sensitive hand zones grip e.g. finger tips. Hard zones where robust hand zones grip.



2142 T (MM)

Hexagon allen key
with 2C-T-handle
for in-hex screws




- > 2-component wing grip for high torque when loosening or tightening
- > Extended wing provides optimal support for the ball of the hand

Code	No.		L1	L2	
2647257	2142 T 2	2	152	125	0,061
2647265	2142 T 2,5	2,5	152	125	0,091
2647273	2142 T 3	3	152	125	0,071
2647281	2142 T 4	4	152	125	0,08
2647303	2142 T 5	5	177	150	0,1
2647311	2142 T 6	6	188	150	0,14
2681439	2142 T 7	7	213	175	0,16
2647338	2142 T 8	8	213	175	0,221
2647346	2142 T 10	10	238	200	0,201


Screwdriver

2142 T (AF)

Hexagon allen key with 2C-T-handle for in-hex screws




- > 2-component wing grip for high torque when loosening or tightening
- > Extended wing provides optimal support for the ball of the hand


Code	No.	●	L1	L2	
2647354	2142 T 1/8AF	1/8	152	125	0,101
2647362	2142 T 5/32AF	5/32	152	125	0,121
2647370	2142 T 3/16AF	3/16	177	150	0,1
2647389	2142 T 1/4AF	1/4	213	175	0,14
2647397	2142 T 5/16AF	5/16	213	175	0,221
2647400	2142 T 3/8AF	3/8	268	200	0,201

DT 2142

Hexagon allen key with 2C-T-handle for in-hex screws




- > With two hexagons, same size each end
- > 2-component wing grip for high torque when loosening or tightening
- > Extended wing provides optimal support for the ball of the hand


Code	No.	●	L1	L2	L3	
2488914	DT 2142 2	2	152	125	15	0,091
2498596	DT 2142 2,5	2,5	152	125	15	0,071
2498618	DT 2142 3	3	152	125	15	0,04
2498626	DT 2142 4	4	152	125	15	0,08
2502631	DT 2142 5	5	177	150	20	0,1
2502658	DT 2142 6	6	188	150	20	0,12
2505487	DT 2142 7	7	213	175	25	0,251
2507447	DT 2142 8	8	213	175	25	0,18
2507471	DT 2142 10	10	238	200	25	0,28

2142 TX

Screwdriver with 2C-T-handle for recessed TX head screws





- > 2-component wing grip for high torque when loosening or tightening
- > Extended wing provides optimal support for the ball of the hand

Code	No.	●	L1	L2	
2509393	2142 TX T5	T5	152	125	0,081
2511622	2142 TX T6	T6	152	125	0,081
2511657	2142 TX T7	T7	152	125	0,081
2513072	2142 TX T8	T8	152	125	0,051
2513102	2142 TX T9	T9	152	125	0,071
2513749	2142 TX T10	T10	152	125	0,061
2516934	2142 TX T15	T15	152	125	0,091
2519062	2142 TX T20	T20	152	125	0,081
2519186	2142 TX T25	T25	177	150	0,091
2521571	2142 TX T27	T27	177	150	0,1
2521598	2142 TX T30	T30	188	150	0,1
2521601	2142 TX T40	T40	213	175	0,14
2521636	2142 TX T45	T45	213	175	0,16
2521644	2142 TX T50	T50	238	200	0,18

WWW.GEDORE.COM

DT 2143 KTX

Hexagon allen key
with 2C-T-handle
for recessed TX
head screws




- > With ball end, working angle approx. 25°
- > 2-component wing grip for high torque when loosening or tightening
- > Extended wing provides optimal support for the ball of the hand

Code	No.		L1	L2	L3	
2647486	DT 2143 KTX T10	T10	152	125	15	0,091
2647494	DT 2143 KTX T15	T15	152	125	15	0,081
2647508	DT 2143 KTX T20	T20	152	125	15	0,071
2647516	DT 2143 KTX T25	T25	177	150	20	0,121
2647524	DT 2143 KTX T27	T27	177	150	20	0,12
2647532	DT 2143 KTX T30	T30	188	150	25	0,14
2647540	DT 2143 KTX T40	T40	213	175	25	0,18

DT 2143 KTX-007

Hexagon socket
key set TX
7 pieces




- > With ball end, working angle approx. 25°
- > 2-component wing grip for high torque when loosening or tightening
- > Extended wing provides optimal support for the ball of the hand

Code	No.	Contents	Pieces	
3037398	DT 2143 KTX-007	DT 2143 KTX, T10 T15 T20 T25 T27 T30 T40	7	0,71

2133 T

Socket wrench
with 2C-T-handle



- > Head depth 25 mm
- > 2-component wing grip for high torque when loosening or tightening
- > Extended wing provides optimal support for the ball of the hand

Code	No.		L1	L2	d	
2647621	2133 T 5,5	5,5	257	230	8	0,101
2647656	2133 T 7	7,0	268	230	11	0,101
2647664	2133 T 8	8	230	230	12	0,18
2647672	2133 T 9	9	230	230	13	0,18
2647680	2133 T 10	10,0	268	230	14	0,18
2647699	2133 T 11	11,0	268	230	16	0,2
2647702	2133 T 12	12,0	268	230	17	0,22
2647710	2133 T 13	13,0	268	230	18	0,24

DTT 42

Hexagon Allen key
for in-hex screws




- > With 3 hexagons, same size each end
- > T-handle fixed

Code	No.		↳ mm	∅	
1669540	DTT 42 3	3	150	5,0	0,042
1669559	DTT 42 4	4	180	6,0	0,064
1669567	DTT 42 5	5	180	7,0	0,092
1669575	DTT 42 6	6	210	8,0	0,134
1669583	DTT 42 8	8	250	9,5	0,224
1669591	DTT 42 10	10	300	12,0	0,418

i 42 DKEL

The first with two ball ends

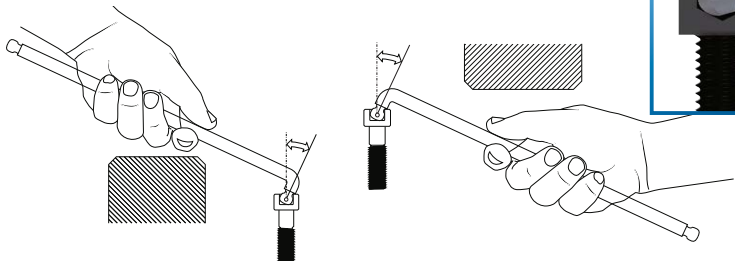

- Two ball ends and an extra short angle side for working optimally in confined spaces
- Positive or negative inclination produces a possible 50° angle of approach (+/- 25°) to the screw axis
- Projecting hindrances can be got round with the two ball ends - rapid work is the outcome
- The GEDORE vanadium steel 59CRV4 with its high manganese share ensures the screwdriver has that strength needed

H 42 CKEL-09

Hexagon allen key set
color-coded
9 pieces




- > Colour coding simplifies the assignment of the correct key width
- > Ball head enables screwing in places that are difficult to access
- > Key easily removable
- > Abrasion-resistant powder-coated

Code	No.	Contents	Pieces	
3297470	H 42 CKEL-09	42 CKEL 1,5 2,2,5 3 4 5 6 8 10	9	0,36

H 42 DKEL-88

Hexagon allen key set
for in-hex screws,
extra long,
double ball end
8 pieces




- > Most used sizes combined in a set
- > 2 ball heads and extra short angle side

Code	No.	Contents	Pieces	
2797186	H 42 DKEL-88	42 DKEL 2 2,5 3 4 5 6 8 10	8	0,4

42 DKEL

Hexagon allen key
for in-hex screws,
extra long,
double ball end




- > 2 ball heads and extra short angle side

Code	No.		L1	L2	
2797062	42 DKEL 1,5	1,5	89	7,5	0,003
2797089	42 DKEL 2	2,0	102	9	0,004
2797097	42 DKEL 2,5	2,5	115	10	0,006
2797100	42 DKEL 3	3,0	129	11,5	0,01
2797119	42 DKEL 4	4,0	144	14,5	0,018
2797127	42 DKEL 5	5,0	165	16,5	0,05
2797135	42 DKEL 6	6,0	186	19	0,06
2797143	42 DKEL 7	7,0	197	20,5	0,07
2797151	42 DKEL 8	8,0	205	22	0,09
2797178	42 DKEL 10	10,0	227	28	0,16

42 KEL

Hexagon allen key for in-hex screws, extra long, with ball end




- > Chrome vanadium steel 59CrV4, chrome-plated

Code	No.		L1	L2	
1563556	42 KEL 1,5	1,5	91,5	15,5	0,003
6370090	42 KEL 2	2,0	102	18	0,004
6370170	42 KEL 2,5	2,5	114,5	20,5	0,006
6370250	42 KEL 3	3,0	129	23	0,01
6370330	42 KEL 4	4,0	144	29	0,019
6370410	42 KEL 5	5,0	165	33	0,033
6370680	42 KEL 6	6,0	186	38	0,053
1729241	42 KEL 7	7,0	197	41	0,076
6370760	42 KEL 8	8,0	208	44	0,103
6370840	42 KEL 10	10,0	234	50	0,234
6370920	42 KEL 12	12,0	262	57	0,287

H 42 KEL-88

Hexagon allen key set for in-hex screws, extra long, with ball end
8 pieces



- > metric
- > Chamfered nose ends facilitate insertion into the screw head

Code	No.	Contents	Pieces	
1523988	H 42 KEL-88	42 KEL 2,5 3 4 5 6 8 10	8	0,415

H 42 EL-88

Hexagon allen key set for in-hex screws, extra long
8 pieces



- > Most used sizes combined in a set
- > Acc. to DIN ISO 2936

Code	No.	Contents	Pieces	
1505416	H 42 EL-88	42 2 2,5 3 4 5 6 8 10 mm	8	0,425

H 42 EL-88 A

Hexagon allen key set for in-hex screws, extra long
8 pieces




- > Most used sizes in a set

Code	No.	Contents	Pieces	
1543555	H 42 EL-88 A	42 5/64 3/32 1/8 5/32 3/16 7/32 1/4 5/16 inch	8	0,3

42 EL (MM)

Hexagon allen key for in-hex screws, extra long




- > Acc. to DIN ISO 2936

Code	No.			L1	L2	
6350810	42 EL 2	2,0	5/64"	102	18	0,004
6351030	42 EL 2,5	2,5		114,5	20,5	0,007
6351110	42 EL 3	3,0		129	23	0,01
6351380	42 EL 4	4,0		144	29	0,019
6351460	42 EL 5	5,0		165	33	0,033
6351540	42 EL 6	6,0		186	38	0,054
2977486	42 EL 7	7,0		194	41	0,07
6351620	42 EL 8	8,0		208	44	0,104
6351700	42 EL 10	10,0		234	50	0,194
6351890	42 EL 12	12,0		262	57	0,293
6351970	42 EL 14	14,0		294	70	0,453

Screwdriver

42 EL (AF)

Hexagon allen key for in-hex screws, extra long



Code	No.			L1	L2	
6350810	42 EL 2	2,0	5/64"	102	18	0,004
1543377	42 EL 3/32AF		3/32"	114,5	20,5	0,006
1543318	42 EL 1/8AF		1/8"	129	23	0,011
1543326	42 EL 5/32AF		5/32"	144	29	0,019
1543334	42 EL 3/16AF		3/16"	165	33	0,03
1543342	42 EL 7/32AF		7/32"	186	38	0,047
1543369	42 EL 1/4AF		1/4"	197	41	0,065
1543350	42 EL 5/16AF		5/16"	208	44	0,103
1543385	42 EL 3/8AF		3/8"	234	50	0,167
1543393	42 EL 1/2AF		1/2"	277	63	0,355
1543407	42 EL 9/16AF		9/16"	294	70	0,475

PH 42-88

Hexagon allen key set for in-hex screws
8 pieces



> Most used sizes in a set

Code	No.	Contents	Pieces	
6352000	PH 42-88	42 2,2,5 3 4 5 6 8 10	8	0,245

H 42-10

Hexagon allen key set for in-hex screws
10 pieces



> Most used sizes in a set
> Acc. to DIN ISO 2936

Code	No.	Contents	Pieces	
1505408	H 42-10	42 1,3 1,5 2,2,5 3 4 5 6 8 10 mm	10	0,259

42 (MM)

Hexagon allen key set for in-hex screws




> Most used sizes in a set

Code	No.	Contents	Pieces	
6347510	42-07	42 2(5/64AF) 2,5 3 4 5 6 8	7	0,144
6349050	42-70	42 2,5 3 4 5 6 8 10	7	0,254
6347780	42-08	42 3 4 5 6 8 10 12 14	8	0,716
6347860	42-09	42 2(5/64AF) 2,5 3 4 5 6 7 8 10	9	0,297

42 (MM)

Hexagon allen key for in-hex screws



> Acc. to DIN ISO 2936
* not standardised

Code	No.			L1	L2	
6342200	42 0,7	0,7		33	7	0,001
6342390	42 0,9	0,9		33	11	0,001
6342470	42 1,3	1,3		41	13	0,001
6340260	42 1,5	1,5		46,5	15,5	0,001
6340340	42 2	2,0	5/64"	52	18	0,002
6340420	42 2,5	2,5		58,5	20,5	0,004
6340500	42 3	3,0		66	23	0,006
6340690	42 4	4,0		74	29	0,011
6340770	42 5	5,0		85	33	0,019
6344840*	42 7/32AF		7/32"	82	32	0,022
6340850	42 6	6,0		96	38	0,031
6340930*	42 7	7,0		102	41	0,044
6341070	42 8	8,0		108	44	0,061
6341150*	42 9	9,0		114	47	0,081
6341230	42 10	10,0		122	50	0,106
6341310	42 12	12,0		137	57	0,169
6341580	42 14	14,0		154	70	0,266
6341660	42 17	17,0		177	80	0,43

Code	No.	⬡	⬡	L1	L2	⚖️
6341740	42 19	19,0		199	89	0,602
6341820	42 22	22,0		222	102	0,907
6341900	42 24	24,0		248	114	1,211
6342550	42 27	27,0		277	127	1,711
6342630	42 30	30,0		315	142	2,423
6342710	42 32	32,0		347	157	3,01

H 42-88 A

Hexagon allen key set
for in-hex screws
8 pieces



> Most used sizes in a set

Code	No.	Contents	Pieces	⚖️
1505424	H 42-88 A	42 5/64 3/32 1/8 5/32 3/16 7/32 1/4 5/16 inch	8	0,172

42 A (AF)

Hexagon allen key set
for in-hex screws




> Most used sizes in a set

Code	No.	Contents	Pieces	⚖️
6348750	42-07A	42 2(5/64AF) 3/32AF 1/8AF 5/32AF 3/16AF 7/32AF(5,5MM) 1/4AF	7	0,103
6348830	42-08A	42 1/8AF 5/32AF 3/16AF 1/4AF 5/16AF 3/8AF 1/2AF 9/16AF	8	0,731
6348910	42-09A	42 2(5/64AF) 3/32AF 1/8AF 5/32AF 3/16AF 7/32AF(5,5MM) 1/4AF 5/16AF 3/8AF	9	0,257

42 (AF)


Hexagon allen key
for in-hex screws



Code	No.	⬡	⬡	L1	L2	⚖️
6342120	42 3/64AF		3/64"	41	13	0,002
6342040	42 1/16AF		1/16"	46,5	15,5	0,002
6344330	42 3/32AF		3/32"	56,5	20,5	0,004
6340340	42 2	2,0	5/64"	52	18	0,002
6344410	42 1/8AF		1/8"	60	23	0,006
6344680	42 5/32AF		5/32"	67	26	0,01
6344760	42 3/16AF		3/16"	73	30	0,015
6344840	42 7/32AF		7/32"	82	32	0,022
6344920	42 1/4AF		1/4"	92	36,5	0,035
6345060	42 5/16AF		5/16"	102	43	0,056
6345140	42 3/8AF		3/8"	115	49	0,094
6345220	42 1/2AF		1/2"	142	61	0,205
6345300	42 9/16AF		9/16"	154	66	0,274
6345490	42 5/8AF		5/8"	168	76	0,376
6345570	42 3/4AF		3/4"	199	89	0,309

42 Z

Hexagon allen key
for in-hex screws



> Acc. to DIN 6911

* not standardised

Code	No.	⬡	L1	⚖️
6342980	42 Z 3	3	63	0,006
6343010	42 Z 4	4	70	0,01
6343280	42 Z 5	5	80	0,019
6343360	42 Z 6	6	90	0,031
6343440*	42 Z 7	7	95	0,042
6343520	42 Z 8	8	100	0,058
6343600	42 Z 10	10	112	0,1
6343790	42 Z 12	12	125	0,162

Screwdriver

SCL 42-70

Hexagon allen key set
for in-hex screws
7 pieces



- > Most used sizes in a set
- > In robust metal clip

Code	No.	Contents	Pieces	
6347350	SCL 42-70	2,5 3 4 5 6 8 10	7	0,36

SCL 42-90 A

Hexagon allen key set
for in-hex screws
9 pieces



- > Most used sizes in a set
- > In robust metal clip

Code	No.	Contents	Pieces	
6354800	SCL 42-90A	5/64 3/32 7/64 1/8 9/64 5/32 3/16 7/32 1/4	9	0,26

SCL 43 TX-80

Hexagon allen key set
for recessed TX
head screws
8 pieces




- > Most used sizes in a set
- > In robust metal clip

Code	No.	Contents	Pieces	
6346460	SCL 43 TX-80	TX T9 T10 T15 T20 T25 T27 T30 T40	8	0,286

42 X

Hexagon allen key
for multi-point screws
XZN




- > Acc. to DIN 65253, tips according to DIN 2325
- > Vanadium steel 50CrV4, chromated

Code	No.		L1	L2	
1531212	42 X 4	M4	63	20	0,009
6350220	42 X 8	M8	98	40	0,043
6350570	42 X 14	M14	139	59	0,191
6350730	42 X 18	M18	178	81	0,333

43

Hexagon allen key
for multi-spline screws
RIBE®



- > Vanadium steel 50CrV4, chromated
- > RIBE® = reg. trademark of Richard Bergner GmbH & Co. KG, Schwabach

Code	No.		L1	L2	
6352270	43 5	M5	71	25	0,016
6352350	43 6	M6	80	28	0,025
6352430	43 8	M8	90	32	0,049
6352780	43 12	M12	112	40	0,135
6352860	43 14	M14	125	45	0,203

H 43 TX

Hexagon allen key set
for recessed TX
head screws



- > In blue plastic holder (LPDE)
- > chrome vanadium steel 50CrV4, burnished

Code	No.	Contents	Pieces	
1531417	H 43 TX-09	43 TX T7 T8 T9 T10 T15 T20 T25 T30 T40	9	0,12
1531425	H 43 TX-88	43 TX T9 T10 T15 T20 T25 T27 T30 T40	8	0,129
1531433	H 43 TX-08	43 TX T10 T15 T20 T25 T27 T30 T40 T45	8	0,168

43 TX-09

Hexagon allen key set
for recessed TX
head screws
9 pieces




- > Most used sizes in a set
- > In blue PVC wallet

Code	No.	Contents	Pieces	
6360960	43 TX-09	43 TX T7 T8 T9 T10 T15 T20 T25 T30 T40	9	0,115

43 TX

Hexagon allen key
for recessed TX
head screws



- > chrome vanadium steel
50CrV4, burnished

Code	No.				L1	L2	
6365090	43 TX T55	T55	M12	11,22 mm	108	35	0,122
6365170	43 TX T60	T60	M14	13,25 mm	120	38	0,187

H 43 KTX-07

Hexagon allen key set
for recessed TX
head screws
7 pieces



- > With ball end

Code	No.	Contents	Pieces	
1531441	H 43 KTX-07	43 KTX T10 T15 T20 T25 T27 T30 T40	7	0,169

708

TX Gauge
E4-E16/T10-T60
12 pieces



- > Easy identification of TX
sizes, internal E4-E16,
external T10-T60

Code	No.	Contents	Pieces	
1394428	708	E4 - E16 T10 - T60	12	0,022

149

Magnetizer and
demagnetizer



- > Magnetizes or
demagnetizes
screwdrivers, tweezers
and similar tools made
from steel

Code	No.	Length mm	Height mm	Width mm	
6416500	149	52	26	50	0,088

156 S

Square bladed awl



- > Blue handle with
hanging hole

Code	No.			
6424520	156 S	100	200	0,084