

LDA3

3rd generation
of the analogue cordless hightorque wrench



***YOU HAVE THE BOLTING CASE.
WE HAVE THE SOLUTION!***

The analogue cordless hightorque wrench



Ergonomic handle
for safe working

Low maintenance thanks to
brushless technology

System power: 720 W
Powerful 90 Wh (18 V/5 Ah)
lithium-ion battery

High tightening accuracy
thanks to
intelligent system integration

Infinitely adjustable
torque from 90 to 8,000 Nm



LDA3






The new analogue cordless hightorque wrench LDA3 3rd generation

- › powerful, fast and efficient
- › precise switch-off electronics
- › Multicolour status LED
- › ergonomic operation




The analogue cordless hightorque wrench

Technical data



Serie LDA3



Serie LAW3



Typ	N·m min ^{*1} / max ^{*2}	~ U/min	■	Ø D mm	H mm	kg ^{*3}
LDA3-05	90 - 500	43	3/4"	80	271	3,6
LDA3-07	120 - 700	27	3/4"	80	304	4,1
LDA3-12	150 - 1.200	20	3/4"	80	304	4,1
LDA3-15	220 - 1.500	14	1"	88	319	5,2
LDA3-22	250 - 2.200	11	1"	88	329	5,9
LDA3-32	350 - 3.200	6,3	1"	88	360	6,3
LDA3-40	500 - 4.000	5,5	1"	88	360	6,3
LDA3-60	700 - 6.000	3,7	1 1/2"	102	376	8,1
LDA3-80	900 - 8.000	2,5	1 1/2"	142	408	10,6
LAW3-12	150 - 1.200	20	3/4"	80	223	5,3
LAW3-22	250 - 2.200	11	1"	88	255	7,0
LAW3-32	350 - 3.200	6,3	1"	88	279	7,5
LAW3-40	500 - 4.000	5,5	1"	88	279	7,5
LAW3-60	700 - 6.000	3,5	1 1/2"	102	291	9,3

Other torques on request

^{*1} Lowest torque in 2nd gear

^{*2} Maximum torque in 1st gear

^{*3} Without reaction arm with battery

Battery: 720g

Vibration is less than 2,5 m/s². Continuous sound pressure level is on average < 78,7 dB (A)

All specifications without guarantee. Subject to technical changes.




Scope of delivery

- › Device
- › Handle (from LAW3-60 Solution)
- › reaction arm, cranked, with lock on function* made of chrome-vanadium steel
- › 3x Lithium-ion battery (90 Wh/18 V/5 Ah)
- › Charger 220–240 V; 50/60 Hz or 110–120V; 50/60 Hz
- › Tool box
- › Operation manual
- › Factory calibration certificate



Optional accessories

- › Reaction arm made of light alloy, straight with adjustable locking knob with movable square-end and retaining ring
- › Reaction ring for welding on

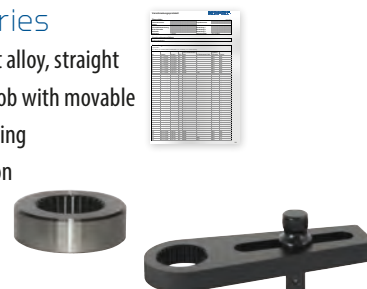

*lock on function available for 3/4" and 1"

GEDORE Torque Solutions GmbH

Bertha-Benz-Straße 12
71665 Vaihingen/ Enz · GERMANY

torque-solutions@gedore.com
www.gedore.com

Energe d.o.o.

Cesta na Brdo 85, 1000 Ljubljana
tel: +386 1 256 10 56, fax: +386 1 256 10 55
mailto:info@energe.si, http://www.energe.si