


REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes



Pressing tongs with teeth prevent
formation of burr on the pressfitting.
Patent EP 2 027 971

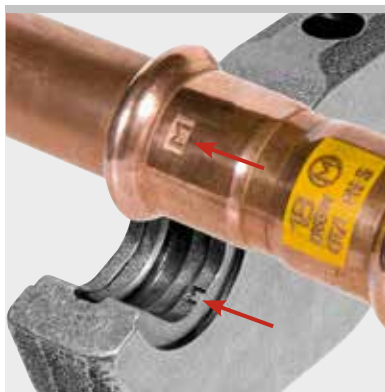

Example REMS pressing tongs M:
"M" imprint on pressed fitting for
traceability according to EN 1775:2007

REMS pressing tongs
REMS pressing rings

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
A				
Aalberts integrated piping systems	U 14*		570760	180,70
	U 16*		570765	180,70
VSH MultiPress	U 20*		570775	180,70
	U 25*		570780	180,70
	U 32		570785	211,20
	U 40		570790	257,90
	U 14 S (PR-2B)**	Z8	574858 R	148,20
	U 16 S (PR-2B)**	Z8	574860 R	148,20
	U 20 S (PR-2B)**	Z8	574862 R	148,20
	U 25 S (PR-2B)**	Z8	574864 R	148,20
	U 32 S (PR-2B)	Z8	574868 R	173,20
	TH 14*		570455	192,90
	TH 16*		570460	192,90
	TH 20*		570470	192,90
	TH 25*		570495	192,90
	TH 32		570480	192,90
	TH 40		570485	255,80
	TH 50 (PZ-S)		572400	669,00
	TH 63 (PZ-S)		572405	669,00
	TH 14 S (PR-2B)**	Z8	574778 R	158,20
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 25 S (PR-2B)**	Z8	574792 R	158,20
	TH 32 S (PR-2B)	Z8	574798 R	158,20
Aalberts integrated piping systems	U 16 ²⁾		570765	180,70
	U 20 ²⁾		570775	180,70
VSH MultiPress Gas ²⁾	U 25 ²⁾		570780	180,70
	U 16 S (PR-2B) ²⁾	Z8	574860 R	148,20
	U 20 S (PR-2B) ²⁾	Z8	574862 R	148,20
	U 25 S (PR-2B) ²⁾	Z8	574864 R	148,20
	TH 16 ²⁾		570460	192,90
	TH 20 ²⁾		570470	192,90
	TH 16 S (PR-2B) ²⁾	Z8	574782 R	158,20
	TH 20 S (PR-2B) ²⁾	Z8	574788 R	158,20
Aalberts integrated piping systems	VMP ½" G (ØD 21,3 mm)		571766 R	222,30
	VMPz ¾" (ØD 26,9 mm)		571764	222,30
VSH PowerPress	VSHVMPz 1" (PR-3B) (ØD 33,7 mm)	Z5	572848 R	505,00
	VMPz 1¼" (PZ-S) (ØD 42,4 mm)		572413	730,00
	VMPz 1½" (PR-3B) (ØD 48,3 mm)	Z5	572844 R	505,00
	VMPz 2" (PR-3B) (ØD 60,3 mm)	Z5	572845 R	505,00
Aalberts integrated piping systems	V 12		570107	159,90
	V 15		570115	159,90
VSH SudoPress Carbon	V 18		570125	159,90
	V 22		570135	159,90
	V 28		570145	159,90
	V 35		570155	159,90
	V 42		570165	373,00
	V 42 (PR-2B)	Z2	572850 R	334,00
	V 54		570175	383,00
	V 54 (PR-2B)	Z2	572851 R	361,00
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108 R	1.213,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
	V 12 S (PR-2B)	Z8	574748 R	131,20
	V 15 S (PR-2B)	Z8	574752 R	131,20
	V 18 S (PR-2B)	Z8	574756 R	131,20
	V 22 S (PR-2B)	Z8	574758 R	131,20
	V 28 S (PR-2B)	Z8	574760 R	131,20
	V 35 S (PR-2B)	Z8	574762 R	131,20
Aalberts integrated piping systems	V 12		570107	159,90
	V 14		570132	159,90
VSH SudoPress Copper	V 15		570115	159,90
	V 16		570137	159,90
	V 18		570125	159,90
	V 22		570135	159,90
	V 28		570145	159,90
	V 35		570155	159,90
	V 42		570165	373,00
	V 42 (PR-2B)	Z2	572850 R	334,00
	V 54		570175	383,00
	V 54 (PR-2B)	Z2	572851 R	361,00
	V 12 S (PR-2B)	Z8	574748 R	131,20
	V 14 S (PR-2B)	Z8	574750 R	131,20
	V 15 S (PR-2B)	Z8	574752 R	131,20
	V 16 S (PR-2B)	Z8	574754 R	131,20
	V 18 S (PR-2B)	Z8	574756 R	131,20
	V 22 S (PR-2B)	Z8	574758 R	131,20
	V 28 S (PR-2B)	Z8	574760 R	131,20
	V 35 S (PR-2B)	Z8	574762 R	131,20
Aalberts integrated piping systems	V 12		570107	159,90
	V 14		570132	159,90
VSH SudoPress Copper Gas	V 15		570115	159,90
	V 16		570137	159,90
	V 18		570125	159,90
	V 22		570135	159,90
	V 28		570145	159,90
	V 35		570155	159,90
	V 42		570165	373,00
	V 42 (PR-2B)	Z2	572850 R	334,00
	V 54		570175	383,00
	V 54 (PR-2B)	Z2	572851 R	361,00
	V 12 S (PR-2B)	Z8	574748 R	131,20
	V 14 S (PR-2B)	Z8	574750 R	131,20
	V 15 S (PR-2B)	Z8	574752 R	131,20
	V 16 S (PR-2B)	Z8	574754 R	131,20
	V 18 S (PR-2B)	Z8	574756 R	131,20
	V 22 S (PR-2B)	Z8	574758 R	131,20
	V 28 S (PR-2B)	Z8	574760 R	131,20
	V 35 S (PR-2B)	Z8	574762 R	131,20

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
Aalberts integrated piping systems	V 15		570115	159,90
	V 18		570125	159,90
VSH SuoPress	V 22		570135	159,90
	V 28		570145	159,90
Stainless	V 35		570155	159,90
	V 42		570165	373,00
	V 42 (PR-2B)	Z2	572850 R	334,00
	V 54		570175	383,00
	V 54 (PR-2B)	Z2	572851 R	361,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
	V 15 S (PR-2B)	Z8	574752 R	131,20
	V 18 S (PR-2B)	Z8	574756 R	131,20
	V 22 S (PR-2B)	Z8	574758 R	131,20
	V 28 S (PR-2B)	Z8	574760 R	131,20
	V 35 S (PR-2B)	Z8	574762 R	131,20
Aalberts integrated piping systems	M 12		570100	159,90
	M 15		570110	159,90
VSH XPress Carbon	M 18 ¹⁾		570120	159,90
	M 22		570130	159,90
	M 28 ¹⁾		570140	159,90
	M 35		570150	159,90
	M 42 (PZ-46)		570160	515,00
	M 54 (PZ-46)		570170	515,00
	M 42 (PR-3S)	Z2	572706 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108 R	1.213,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
	M 12 S (PR-2B)	Z8	574736 R	131,20
	M 15 S (PR-2B)	Z8	574738 R	131,20
	M 18 S (PR-2B)	Z8	574740 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20
Aalberts integrated piping systems	M 12		570100	159,90
	M 15		570110	159,90
VSH XPress Copper	M 18 ¹⁾		570120	159,90
	M 22		570130	159,90
	M 28 ¹⁾		570140	159,90
	M 35		570150	159,90
	M 42 (PR-3S)	Z2	572706 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00
	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100 R	1.107,00
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108 R	1.213,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
	XP 108,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579109 R	1.416,00
	M 12 S (PR-2B)	Z8	574736 R	131,20
	M 15 S (PR-2B)	Z8	574738 R	131,20
	M 18 S (PR-2B)	Z8	574740 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20
Aalberts integrated piping systems	M 15		570110	159,90
	M 18 ¹⁾		570120	159,90
VSH XPress Copper Gas	M 22		570130	159,90
	M 28 ¹⁾		570140	159,90
	M 35		570150	159,90
	M 42 (PR-3S)	Z2	572706 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00
	M 15 S (PR-2B)	Z8	574738 R	131,20
	M 18 S (PR-2B)	Z8	574740 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20
Aalberts integrated piping systems	M 15		570110	159,90
	M 18 ¹⁾		570120	159,90
VSH XPress Stainless	M 22		570130	159,90
	M 28 ¹⁾		570140	159,90
	M 35		570150	159,90
	M 42 (PZ-46)		570160	515,00
	M 54 (PZ-46)		570170	515,00
	M 42 (PR-3S)	Z2	572706 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
	M 15 S (PR-2B)	Z8	574738 R	131,20
	M 18 S (PR-2B)	Z8	574740 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20
Aalberts integrated piping systems	M 15		570110	159,90
	M 18 ¹⁾		570120	159,90
VSH XPress Stainless Gas	M 22		570130	159,90
	M 28 ¹⁾		570140	159,90
	M 35		570150	159,90
	M 42 (PR-3S)	Z2	572706 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00
	M 15 S (PR-2B)	Z8	574738 R	131,20
	M 18 S (PR-2B)	Z8	574740 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
AC-FIX PRESS (Global Piping Systems)	H 12*		570300	173,60	AHLSELL A-press elförzinkad M	M 12		570100	159,90
	H 16*		570320	173,60		M 15		570110	159,90
	H 20*		570350	173,60		M 18		570120	159,90
	H 25*		570360	173,60		M 22		570130	159,90
	H 32		570380	173,60		M 28		570140	159,90
	RFz 12*		571320	201,00		M 35		570150	159,90
	RFz 16*		571325	201,00		M 42 (PR-3S)	Z2	572706 R	696,00
	RFz 20*		571330	201,00		M 54 (PR-3S)	Z2	572708 R	696,00
	RFz 25		571335	201,00		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	RFz 32		571340	201,00		M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
	U 16*		570765	180,70		M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
	U 20*		570775	180,70		M 12 S (PR-2B)	Z8	574736 R	131,20
	U 25*		570780	180,70		M 15 S (PR-2B)	Z8	574738 R	131,20
	U 32		570785	211,20		M 18 S (PR-2B)	Z8	574740 R	131,20
	U 16 S (PR-2B)**	Z8	574860 R	148,20		M 22 S (PR-2B)	Z8	574742 R	131,20
	U 20 S (PR-2B)**	Z8	574862 R	148,20		M 28 S (PR-2B)	Z8	574744 R	131,20
	U 25 S (PR-2B)**	Z8	574864 R	148,20		M 35 S (PR-2B)	Z8	574746 R	131,20
	U 32 S (PR-2B)	Z8	574868 R	173,20		V 12		570107	159,90
	VX 16*		571635	222,30		V 15		570115	159,90
	VX 20*		571640	222,30		V 18		570125	159,90
						V 22		570135	159,90
						V 28		570145	159,90
						V 35		570155	159,90
AC-FIX PRESS DUO (Global Piping Systems)	RFz 16*		571325	201,00		V 42		570165	373,00
	RFz 20*		571330	201,00		V 54		570175	383,00
	RFz 25		571335	201,00		V 12 S (PR-2B)	Z8	574748 R	131,20
	RFz 32		571340	201,00		V 15 S (PR-2B)	Z8	574752 R	131,20
	TH 16*		570460	192,90		V 18 S (PR-2B)	Z8	574756 R	131,20
	TH 20*		570470	192,90		V 22 S (PR-2B)	Z8	574758 R	131,20
	TH 25*		570495	192,90		V 28 S (PR-2B)	Z8	574760 R	131,20
	TH 26*		570475	192,90		V 35 S (PR-2B)	Z8	574762 R	131,20
	TH 32		570480	192,90	AHLSELL A-press koppar M	M 12		570100	159,90
	TH 16 S (PR-2B)**	Z8	574782 R	158,20		M 15		570110	159,90
	TH 20 S (PR-2B)**	Z8	574788 R	158,20		M 18		570120	159,90
	TH 25 S (PR-2B)**	Z8	574792 R	158,20		M 22		570130	159,90
	TH 26 S (PR-2B)**	Z8	574794 R	158,20		M 28		570140	159,90
	TH 32 S (PR-2B)	Z8	574798 R	158,20		M 35		570150	159,90
	U 16*		570765	180,70		M 42 (PR-3S)	Z2	572706 R	696,00
	U 20*		570775	180,70		M 54 (PR-3S)	Z2	572708 R	696,00
	U 25*		570780	180,70		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	U 26* ¹²⁾		570750	211,20		M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
	U 32		570785	211,20		M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
	U 16 S (PR-2B)**	Z8	574860 R	148,20		M 15 S (PR-2B)	Z8	574738 R	131,20
	U 20 S (PR-2B)**	Z8	574862 R	148,20		M 18 S (PR-2B)	Z8	574740 R	131,20
	U 25 S (PR-2B)**	Z8	574864 R	148,20		M 22 S (PR-2B)	Z8	574742 R	131,20
	U 26 S (PR-2B)**	Z8	574866 R	173,20		M 28 S (PR-2B)	Z8	574744 R	131,20
	U 32 S (PR-2B)	Z8	574868 R	173,20		M 35 S (PR-2B)	Z8	574746 R	131,20
AC-FIX PRESS-MULTI (Global Piping Systems)	H 16*		570320	173,60		V 12		570107	159,90
	H 18*		570340	173,60		V 15		570115	159,90
	H 20*		570350	173,60		V 18		570125	159,90
	H 25*		570360	173,60		V 22		570135	159,90
	H 32		570380	173,60		V 28		570145	159,90
	RFz 16*		571325	201,00		V 35		570155	159,90
	RFz 20*		571330	201,00		V 42		570165	373,00
	RFz 25		571335	201,00		V 54		570175	383,00
	RFz 32		571340	201,00		V 12 S (PR-2B)	Z8	574748 R	131,20
	U 16*		570765	180,70		V 15 S (PR-2B)	Z8	574752 R	131,20
	U 18*		570770	180,70		V 18 S (PR-2B)	Z8	574756 R	131,20
	U 20*		570775	180,70		V 22 S (PR-2B)	Z8	574758 R	131,20
	U 25*		570780	180,70		V 28 S (PR-2B)	Z8	574760 R	131,20
	U 32		570785	211,20		V 35 S (PR-2B)	Z8	574762 R	131,20
	U 16 S (PR-2B)**	Z8	574860 R	148,20	AHLSELL A-press rostfritt	M 15		570110	159,90
	U 18 S (PR-2B)**	Z8	574870 R	148,20		M 18		570120	159,90
	U 20 S (PR-2B)**	Z8	574862 R	148,20		M 22		570130	159,90
	U 25 S (PR-2B)**	Z8	574864 R	148,20		M 28		570140	159,90
	U 32 S (PR-2B)	Z8	574868 R	173,20		M 35		570150	159,90
ACOME MT	ACz 12*		572642	201,00		M 42 (PR-3S)	Z2	572706 R	696,00
	ACz 16*		572644	201,00		M 54 (PR-3S)	Z2	572708 R	696,00
	ACz 20*		572646	201,00		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	ACz 25		572648	201,00		M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
						M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 227. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 227. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 230.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC, see page 238.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

¹³⁾ Only pressing tongs/S pressing rings (PR-2B) from designation "125" (1st quarter of 2025), "225" (2nd quarter of 2025) etc. can be used. The designation is stamped on every pressing jaw.

The suitability of REMS pressing tools for pressfitting systems: Date 13.10.2025. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 288 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
AIRBEL PRESSCLIM	M 15		570110	159,90
	M 18		570120	159,90
	M 22		570130	159,90
	M 28		570140	159,90
	M 35		570150	159,90
	M 42 (PR-3S)	Z2	572706 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
	M 15 S (PR-2B)	Z8	574738 R	131,20
	M 18 S (PR-2B)	Z8	574740 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20
AIRBEL SERTINOX	M 15		570110	159,90
	M 18		570120	159,90
	M 22		570130	159,90
	M 28		570140	159,90
	M 35		570150	159,90
	M 42 (PR-3S)	Z2	572706 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
	M 15 S (PR-2B)	Z8	574738 R	131,20
	M 18 S (PR-2B)	Z8	574740 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20
ALB Sistema Multicapa para calefacción y sanitario	TH 16*		570460	192,90
	TH 18*		570465	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	TH 40		570485	255,80
	TH 50 (PZ-S)		572400	669,00
	TH 63 (PZ-S)		572405	669,00
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 18 S (PR-2B)**	Z8	574786 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 32 S (PR-2B)**	Z8	574798 R	158,20
	H 16*		570320	173,60
	H 18*		570340	173,60
	H 20*		570350	173,60
	H 26*		570370	173,60
	H 32		570380	173,60
	H 40 (PZ-4G)		570390	586,00
	U 16*		570765	180,70
	U 18*		570770	180,70
	U 20*		570775	180,70
	U 26* ¹²⁾		570750	211,20
	U 32		570785	211,20
	U 40		570790	257,90
	U 16 S (PR-2B)**	Z8	574860 R	148,20
	U 18 S (PR-2B)**	Z8	574870 R	148,20
	U 20 S (PR-2B)**	Z8	574862 R	148,20
	U 26 S (PR-2B)**	Z8	574866 R	173,20
	U 32 S (PR-2B)	Z8	574868 R	173,20
ALB Sistema Multicapa para Gas	TH 16*		570460	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 32 S (PR-2B)	Z8	574798 R	158,20
	H 16*		570320	173,60
	H 20*		570350	173,60
	H 26*		570370	173,60
	H 32		570380	173,60
	U 16*		570765	180,70
	U 20*		570775	180,70
	U 26* ¹²⁾		570750	211,20
	U 32		570785	211,20
	U 16 S (PR-2B)**	Z8	574860 R	148,20
	U 20 S (PR-2B)**	Z8	574862 R	148,20
ALTECH Altech	Rfz 12*		571320	201,00
	Rfz 16*		571325	201,00
	Rfz 20*		571330	201,00
	Rfz 25		571335	201,00
APE MULTYGAS Serie AP Gas	TH 16*		570460	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 32 S (PR-2B)	Z8	574798 R	158,20

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
APE Serie AP	B 16*		570850	210,20
	B 20*		570860	210,20
	B 26		570870	232,50
	B 32		570880	232,50
	H 16*		570320	173,60
	H 20*		570350	173,60
	H 26*		570370	173,60
	H 32		570380	173,60
	TH 16*		570460	192,90
	TH 18*		570465	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 18 S (PR-2B)**	Z8	574786 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 32 S (PR-2B)	Z8	574798 R	158,20
APE Serie APL	U 16*		570765	180,70
	U 20*		570775	180,70
	U 16 S (PR-2B)**	Z8	574860 R	148,20
	U 20 S (PR-2B)**	Z8	574862 R	148,20
	H 16*		570320	173,60
	H 18*		570340	173,60
	H 20*		570350	173,60
	H 25*		570360	173,60
	H 26*		570370	173,60
	H 32		570380	173,60
	TH 16*		570460	192,90
	TH 18*		570465	192,90
	TH 20*		570470	192,90
	TH 25*		570495	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 18 S (PR-2B)**	Z8	574786 R	158,20
AQUATECHNIK Press-fitting metal	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 25 S (PR-2B)**	Z8	574792 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 32 S (PR-2B)	Z8	574798 R	158,20
	U 16*		570765	180,70
	U 18*		570770	180,70
	U 20*		570775	180,70
	U 16 S (PR-2B)**	Z8	574860 R	148,20
	U 18 S (PR-2B)**	Z8	574870 R	148,20
	U 20 S (PR-2B)**	Z8	574862 R	148,20
	H 16*		570320	173,60
	H 20*		570350	173,60
	H 26*		570370	173,60
	H 32		570380	173,60
	TH 16*		570460	192,90
	TH 20*		570475	192,90
	TH 32		570480	192,90
	TH 40		570485	255,80
AQUATECHNIK Universal	TH 50 (PZ-S)		572400	669,00
	TH 63 (PZ-S)		572405	669,00
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 32 S (PR-2B)**	Z8	574798 R	158,20
	U 16*		570765	180,70
	U 20*		570775	180,70
	U 26* ¹²⁾		570750	211,20
	U 32		570785	211,20
	U 16 S (PR-2B)**	Z8	574860 R	148,20
	U 20 S (PR-2B)**	Z8	574862 R	148,20
	U 26 S (PR-2B)**	Z8	574866 R	173,20
	U 32 S (PR-2B)	Z8	574868 R	173,20
	B 16*		570850	210,20
	B 20*		570860	210,20
	B 26		570870	232,50
	B 32		570880	232,50
	F 16*		570717	183,80
	F 20*		570727	183,80
	F 26*		570730	199,00
	F 32		570735	199,00
	F 16 S (PR-2B)**	Z8	574728 R	150,80
	F 20 S (PR-2B)**	Z8	574730 R	150,80
	F 26 S (PR-2B)**	Z8	574732 R	163,20
	F 32 S (PR-2B)**	Z8	574734 R	163,20
	H 16*		570320	173,60
	H 20*		570350	173,60
	H 26*		570370	173,60
	H 32		570380	173,60
	TH 16*		570460	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 32 S (PR-2B)**	Z8	574798 R	158,20
	U 16*		570765	180,70
	U 20*		570775	180,70
	U 26* ¹²⁾		570750	211,20
	U 32		570785	211,20
	U 16 S (PR-2B)**	Z8	574860 R	148,20
	U 20 S (PR-2B)**	Z8	574862 R	148,20
	U 26 S (PR-2B)**	Z8	574866 R	173,20
	U 32 S (PR-2B)**	Z8	574868 R	173,20

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
ARKA DUROsystem	H 16*		570320	173,60	ASSOTHERM IPC-RAC Carbon Steel	M 15		570110	159,90
	H 20*		570350	173,60		M 18		570120	159,90
	H 25*		570360	173,60		M 22		570130	159,90
	H 26*		570370	173,60		M 28		570140	159,90
	H 32		570380	173,60		M 35		570150	159,90
	TH 16*		570460	192,90		M 42 (PZ-4G)		570160	515,00
	TH 20*		570470	192,90		M 54 (PZ-4G)		570170	515,00
	TH 25*		570495	192,90		M 42 (PR-3S)	Z2	572706 R	696,00
	TH 26*		570475	192,90		M 54 (PR-3S)	Z2	572708 R	696,00
	TH 32		570490	192,90		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	TH 16 S (PR-2B)**	Z8	574782 R	158,20		M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
	TH 20 S (PR-2B)**	Z8	574788 R	158,20		M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
	TH 25 S (PR-2B)**	Z8	574792 R	158,20		M 15 S (PR-2B)	Z8	574738 R	131,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20		M 18 S (PR-2B)	Z8	574740 R	131,20
	TH 32 S (PR-2B)	Z8	574798 R	158,20		M 22 S (PR-2B)	Z8	574742 R	131,20
	U 16*		570765	180,70		M 28 S (PR-2B)	Z8	574744 R	131,20
	U 20*		570775	180,70		M 35 S (PR-2B)	Z8	574746 R	131,20
ARKA System Calido	U 16 S (PR-2B)**	Z8	574860 R	148,20	ASSOTHERM IPI-RAX Inox	M 15		570110	159,90
	U 20 S (PR-2B)**	Z8	574862 R	148,20		M 18		570120	159,90
	M 15		570110	159,90		M 22		570130	159,90
	M 18		570120	159,90		M 28		570140	159,90
	M 22		570130	159,90		M 35		570150	159,90
	M 28		570140	159,90		M 42 (PZ-4G)		570160	515,00
	M 35		570150	159,90		M 54 (PZ-4G)		570170	515,00
	M 15 S (PR-2B)	Z8	574738 R	131,20		M 42 (PR-3S)	Z2	572706 R	696,00
	M 18 S (PR-2B)	Z8	574740 R	131,20		M 54 (PR-3S)	Z2	572708 R	696,00
	M 22 S (PR-2B)	Z8	574742 R	131,20		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	M 28 S (PR-2B)	Z8	574744 R	131,20		M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
	M 35 S (PR-2B)	Z8	574746 R	131,20		M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
	V 15		570115	159,90		M 15 S (PR-2B)	Z8	574738 R	131,20
	V 18		570125	159,90		M 18 S (PR-2B)	Z8	574740 R	131,20
	V 22		570135	159,90		M 22 S (PR-2B)	Z8	574742 R	131,20
	V 28		570145	159,90		M 28 S (PR-2B)	Z8	574744 R	131,20
ARKA System Calido Gas	V 35		570155	159,90	ASSOTHERM IPI-RAX Inox Gas	M 35 S (PR-2B)	Z8	574746 R	131,20
	V 15 S (PR-2B)	Z8	574752 R	131,20		M 15		570110	159,90
	V 18 S (PR-2B)	Z8	574756 R	131,20		M 18		570120	159,90
	V 22 S (PR-2B)	Z8	574758 R	131,20		M 22		570130	159,90
	V 28 S (PR-2B)	Z8	574760 R	131,20		M 28		570140	159,90
	V 35 S (PR-2B)	Z8	574762 R	131,20		M 35		570150	159,90
	M 15		570110	159,90		M 42 (PZ-4G)		570160	515,00
	M 18		570120	159,90		M 54 (PZ-4G)		570170	515,00
	M 22		570130	159,90		M 42 (PR-3S)	Z2	572706 R	696,00
	M 28		570140	159,90		M 54 (PR-3S)	Z2	572708 R	696,00
	M 15 S (PR-2B)	Z8	574738 R	131,20		M 76,1 XL (PR-3S)	Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	M 18 S (PR-2B)	Z8	574740 R	131,20		M 88,9 G XL (PR-3S) ⁷⁾	Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
	M 22 S (PR-2B)	Z8	574742 R	131,20		M 108,0 G XL (PR-3S) ⁷⁾	Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
	M 28 S (PR-2B)	Z8	574744 R	131,20		M 15 S (PR-2B)	Z8	574738 R	131,20
	V 15		570115	159,90		M 18 S (PR-2B)	Z8	574740 R	131,20
	V 18		570125	159,90		M 22 S (PR-2B)	Z8	574742 R	131,20
Aschl NIR	V 22		570135	159,90	ASSOTHERM IPM-Multistrato	M 28 S (PR-2B)	Z8	574744 R	131,20
	V 28		570145	159,90		M 35 S (PR-2B)	Z8	574746 R	131,20
	V 15 S (PR-2B)	Z8	574752 R	131,20		H 16*		570320	173,60
	V 18 S (PR-2B)	Z8	574756 R	131,20		H 20*		570350	173,60
	V 22 S (PR-2B)	Z8	574758 R	131,20		H 26*		570370	173,60
	V 28 S (PR-2B)	Z8	574760 R	131,20		H 32		570380	173,60
	M 15		570110	159,90		TH 16*		570460	192,90
	M 18		570120	159,90		TH 20*		570470	192,90
	M 22		570130	159,90		TH 26*		570475	192,90
	M 28		570140	159,90		TH 32		570480	192,90
	M 35		570150	159,90		THL 32		570487	192,90
	M 42 (PR-3S)	Z2	572706 R	696,00		TH 40		570485	255,80
	M 54 (PR-3S)	Z2	572708 R	696,00		TH 50 (PZ-S)		572400	669,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00		TH 63 (PZ-S)		572405	669,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00		TH 16 S (PR-2B)**	Z8	574782 R	158,20
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00		TH 20 S (PR-2B)**	Z8	574788 R	158,20
Aschl NIR	M 15 S (PR-2B)	Z8	574738 R	131,20		TH 26 S (PR-2B)**	Z8	574794 R	158,20
	M 18 S (PR-2B)	Z8	574740 R	131,20		TH 32 S (PR-2B)	Z8	574798 R	158,20
	M 22 S (PR-2B)	Z8	574742 R	131,20		U 16*		570765	180,70
	M 28 S (PR-2B)	Z8	574744 R	131,20		U 20*		570775	180,70
	M 35 S (PR-2B)	Z8	574746 R	131,20		U 26* ¹²⁾		570750	211,20
						U 32		570785	211,20
						U 16 S (PR-2B)**	Z8	574860 R	148,20
						U 20 S (PR-2B)**	Z8	574862 R	148,20
						U 26 S (PR-2B)**	Z8	574866 R	173,20
						U 32 S (PR-2B)**	Z8	574868 R	173,20

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 227. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 227. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 230.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 238.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

¹³⁾ Only pressing tongs/S pressing rings (PR-2B) from designation "125" (1st quarter of 2025), "225" (2nd quarter of 2025) etc. can be used. The designation is stamped on every pressing jaw.

The suitability of REMS pressing tools for pressfitting systems: Date 13.10.2025. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 288 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
ASSOTHERM IPR-RRR Copper	M 15		570110	159,90
	M 18		570120	159,90
	M 22		570130	159,90
	M 28		570140	159,90
	M 35		570150	159,90
	M 42 (PZ-4G)		570160	515,00
	M 54 (PZ-4G)		570170	515,00
	M 42 (PR-3S)	Z2	572706 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
	M 15 S (PR-2B)	Z8	574738 R	131,20
	M 18 S (PR-2B)	Z8	574740 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20
ASSOTHERM IPR-RRR Copper Gas	M 15		570110	159,90
	M 18		570120	159,90
	M 22		570130	159,90
	M 28		570140	159,90
	M 35		570150	159,90
	M 15 S (PR-2B)	Z8	574738 R	131,20
	M 18 S (PR-2B)	Z8	574740 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20
ASTM F 1807 (Fittings with Copper Crimp Ring for PEX tubing)	US ¾"		571450	219,30
	US ½"		571455	219,30
	US ¾"		571460	219,30
	US 1"		571465	219,30
	US 1 ¼"		571470	219,30
	US 1 ½"		571475	219,30
	US 2"		571477	295,40
ATUSA ITALIA INSTALPRESS CARBON STEEL PRESS FITTINGS	M 15		570110	159,90
	M 18		570120	159,90
	M 22		570130	159,90
	M 28		570140	159,90
	M 35		570150	159,90
	M 42 (PR-3S)	Z2	572706 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
	M 15 S (PR-2B)	Z8	574738 R	131,20
	M 18 S (PR-2B)	Z8	574740 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20
ATUSA ITALIA INSTALPRESS STAINLESS STEEL PRESS FITTINGS	M 15		570110	159,90
	M 18		570120	159,90
	M 22		570130	159,90
	M 28		570140	159,90
	M 35		570150	159,90
	M 42 (PR-3S)	Z2	572706 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
	M 15 S (PR-2B)	Z8	574738 R	131,20
	M 18 S (PR-2B)	Z8	574740 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20
AUSTEC PEX-B, PEX-AL-PEX (AUS)	TH 16*		570460	192,90
	TH 20*		570470	192,90
	TH 25*		570495	192,90
	TH 32		570480	192,90
	U 16*		570765	180,70
	U 20*		570775	180,70
	U 25*		570780	180,70
	U 32		570785	211,20
AUSTEC PEX-AL-PEX GAS (AUS)	TH 16*		570460	192,90
	TH 20*		570470	192,90
	TH 25*		570495	192,90
	TH 32		570480	192,90
	U 16*		570765	180,70
	U 20*		570775	180,70
	U 25*		570780	180,70
	U 32		570785	211,20
AYOR FIXOCONNECT Press	H 12*		570300	173,60
	H 16*		570320	173,60
	H 20*		570350	173,60
	H 25*		570360	173,60
	Rfz 12*		571320	201,00
	Rfz 16*		571325	201,00
	Rfz 20*		571330	201,00
	Rfz 25		571335	201,00
	U 16*		570765	180,70
	U 20*		570775	180,70
	U 25*		570780	180,70

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
AYOR FIXOMULTIX	H 16*		570320	173,60
	H 20*		570350	173,60
	H 26*		570370	173,60
	H 32		570380	173,60
	TH 16*		570460	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 32 S (PR-2B)	Z8	574798 R	158,20
	U 16*		570765	180,70
	U 20*		570775	180,70
	U 26* ¹²⁾		570750	211,20
	U 32		570785	211,20
	U 40		570790	257,90
AYOR SOMATHERM FOR YOU -1	U 50		570795	310,00
	U 63 (PR-3B)	Z4	572837 R	772,00
	U 63 (PZ-S)		572365	669,00
	U 75 (PR-3B)	Z4	572828 R	680,00
	H 16*		570320	173,60
	H 20*		570350	173,60
	H 26*		570370	173,60
	TH 16*		570460	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
AYOR SOMATHERM FOR YOU -2	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	U 16*		570765	180,70
	U 20*		570775	180,70
	U 26* ¹²⁾		570750	211,20
	H 12*		570300	173,60
	H 16*		570320	173,60
	H 20*		570350	173,60
	H 25*		570360	173,60
B				
Bampi BALPEX serie LP	TH 16*		570460	192,90
	TH 18*		570465	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	TH 40		570485	255,80
	TH 50 (PZ-S)		572400	669,00
	TH 63 (PZ-S)		572405	669,00
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 18 S (PR-2B)**	Z8	574786 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 32 S (PR-2B)	Z8	574798 R	158,20
	U 16*		570765	180,70
	U 18*		570770	180,70
	U 20*		570775	180,70
	U 26* ¹²⁾		570750	211,20
Bampi BALPEX serie MP	U 32		570785	211,20
	U 40		570790	257,90
	U 50		570795	310,00
	U 63 (PR-3B)	Z4	572837 R	772,00
	U 63 (PZ-S)		572365	669,00
	U 16 S (PR-2B)**	Z8	574860 R	148,20
	U 18 S (PR-2B)**	Z8	574870 R	148,20
	U 20 S (PR-2B)**	Z8	574862 R	148,20
	U 26 S (PR-2B)**	Z8	574866 R	173,20
	U 32 S (PR-2B)	Z8	574868 R	173,20
	TH 16*		570460	192,90
	TH 18*		570465	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	TH 40		570485	255,80
	TH 50 (PZ-S)		572400	669,00
Bampi BALPEX Gas	TH 63 (PZ-S)		572405	669,00
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 18 S (PR-2B)**	Z8	574786 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 32 S (PR-2B)	Z8	574798 R	158,20
	TH 16*		570460	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
BARBI EASYPRESS (Industrial Blansol)	H 12*		570300	173,60	Brass Form Master-Al-Pex	H 16*		570320	173,60
	H 16*		570320	173,60		H 18*		570340	173,60
	H 20*		570350	173,60		H 20*		570350	173,60
	H 25*		570360	173,60		TH 16*		570460	192,90
	H 32		570380	173,60		TH 18*		570465	192,90
	RFz 12*		571320	201,00		TH 20*		570470	192,90
	RFz 16*		571325	201,00		TH 26*		570475	192,90
	RFz 20*		571330	201,00		TH 32		570480	192,90
	RFz 25		571335	201,00		TH 16 S (PR-2B)**	Z8	574782 R	158,20
	RFz 32		571340	201,00		TH 18 S (PR-2B)**	Z8	574786 R	158,20
	U 16*		570765	180,70		TH 20 S (PR-2B)**	Z8	574788 R	158,20
	U 20*		570775	180,70		TH 26 S (PR-2B)**	Z8	574794 R	158,20
	U 25*		570780	180,70		TH 32 S (PR-2B)	Z8	574798 R	158,20
	U 32		570785	211,20		U 16*		570765	180,70
	U 16 S (PR-2B)**	Z8	574860 R	148,20		U 18*		570770	180,70
	U 20 S (PR-2B)**	Z8	574862 R	148,20		U 20*		570775	180,70
	U 25 S (PR-2B)**	Z8	574864 R	148,20		U 16 S (PR-2B)**	Z8	574860 R	148,20
	U 32 S (PR-2B)	Z8	574868 R	173,20		U 18 S (PR-2B)**	Z8	574870 R	148,20
						U 20 S (PR-2B)**	Z8	574862 R	148,20
BARBI MULTIPEX (Industrial Blansol)	H 14*		570310	173,60	Brass & Fittings PRESSMAN MultiPress	RFz 16*		571325	201,00
	H 16*		570320	173,60		RFz 18*		571327	201,00
	H 18*		570340	173,60		ACz 20*		572646	201,00
	H 20*		570350	173,60		RFz 25		571335	201,00
	H 25*		570360	173,60		RFz 32		571340	201,00
	H 26*		570370	173,60	Brass & Fittings PRESSMAN RetiPress	RFz 16*		571325	201,00
	H 32		570380	173,60		RFz 18*		571327	201,00
	RFz 16*		571325	201,00		ACz 20*		572646	201,00
	RFz 18*		571327	201,00		RFz 25		571335	201,00
	RFz 20*		571330	201,00		RFz 32		571340	201,00
	RFz 25		571335	201,00	BRASSTECH MULTItermoSAN Brasspress	B 16*		570850	210,20
	RFz 32		571340	201,00		B 20*		570860	210,20
	TH 16*		570460	192,90		B 26		570870	232,50
	TH 20*		570470	192,90		B 32		570880	232,50
	TH 26*		570475	192,90		F 16*		570717	183,80
	TH 32		570480	192,90		F 20*		570727	183,80
	TH 16 S (PR-2B)**	Z8	574782 R	158,20		F 26*		570730	199,00
	TH 20 S (PR-2B)**	Z8	574788 R	158,20		F 16 S (PR-2B)**	Z8	574728 R	150,80
	TH 26 S (PR-2B)**	Z8	574794 R	158,20		F 20 S (PR-2B)**	Z8	574730 R	150,80
	TH 32 S (PR-2B)**	Z8	574798 R	158,20		F 26 S (PR-2B)**	Z8	574732 R	163,20
	U 16*		570765	180,70		H 16*		570320	173,60
	U 18*		570770	180,70		H 18*		570340	173,60
	U 20*		570775	180,70		H 20*		570350	173,60
	U 25*		570780	180,70		H 26*		570370	173,60
	U 26* ¹²⁾		570750	211,20		TH 16*		570460	192,90
	U 32		570785	211,20		TH 18*		570465	192,90
	U 40		570790	257,90		TH 20*		570470	192,90
	U 50		570795	310,00		TH 26*		570475	192,90
	U 63 (PR-3B)	Z4	572837 R	772,00		TH 32		570480	192,90
	U 63 (PZ-S)		572365	669,00		TH 40		570485	255,80
	U 16 S (PR-2B)**	Z8	574860 R	148,20		TH 50 (PZ-S)		572400	669,00
	U 18 S (PR-2B)**	Z8	574870 R	148,20		TH 63 (PZ-S)		572405	669,00
	U 20 S (PR-2B)**	Z8	574862 R	148,20		TH 16 S (PR-2B)**	Z8	574782 R	158,20
	U 25 S (PR-2B)**	Z8	574864 R	148,20		TH 18 S (PR-2B)**	Z8	574786 R	158,20
	U 26 S (PR-2B)**	Z8	574866 R	173,20		TH 20 S (PR-2B)**	Z8	574788 R	158,20
	U 32 S (PR-2B)	Z8	574868 R	173,20		TH 26 S (PR-2B)**	Z8	574794 R	158,20
BEGETUBE/ IVAR	B 14*		570845	210,20		TH 32 S (PR-2B)	Z8	574798 R	158,20
	B 16*		570850	210,20		U 16*		570765	180,70
	B 18*		570855	210,20		U 18*		570770	180,70
	B 20*		570860	210,20		U 20*		570775	180,70
	B 26		570870	232,50		U 32		570785	211,20
	B 32		570880	232,50		U 16 S (PR-2B)**	Z8	574860 R	148,20
	Fz 40		570742	212,20		U 18 S (PR-2B)**	Z8	574870 R	148,20
	Fz 50		570747	322,00		U 20 S (PR-2B)**	Z8	574862 R	148,20
	F 63 (PZ-S)		572385	669,00		U 32 S (PR-2B)	Z8	574868 R	173,20
	Fz 75 (PR-3B)	Z4	572830 R	641,00					
Béné inox Série 41	M 15		570110	159,90					
	M 18		570120	159,90					
	M 22		570130	159,90					
	M 28		570140	159,90					
	M 35		570150	159,90					
	M 42 (PR-3S)	Z2	572706 R	696,00					
	M 54 (PR-3S)	Z2	572708 R	696,00					
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00					
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00					
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00					
	M 15 S (PR-2B)	Z8	574738 R	131,20					
	M 18 S (PR-2B)	Z8	574740 R	131,20					
	M 22 S (PR-2B)	Z8	574742 R	131,20					
	M 28 S (PR-2B)	Z8	574744 R	131,20					
	M 35 S (PR-2B)	Z8	574746 R	131,20					

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 227. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 227. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 230.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 238.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

¹³⁾ Only pressing tongs/S pressing rings (PR-2B) from designation "125" (1st quarter of 2025), "225" (2nd quarter of 2025) etc. can be used.
The designation is stamped on every pressing jaw.

The suitability of REMS pressing tools for pressfitting systems: Date 13.10.2025. For the updated situation regarding suitability status check our website:
www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 288 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
C				
Cello Products >B< Press	VUS ½" (OD 15,9 mm)		571770	192,90
	VUS ¾" (OD 22,2 mm)		571775	192,90
	VUS 1" (OD 28,6 mm)		571780	192,90
	VUS 1¼" (OD 34,9 mm)		571785	192,90
	VUS 1½" (OD 41,3 mm)		571790	373,00
	VUS 2" (OD 54,0 mm)		571795	383,00
CGR DYNAFLU multicouche	H 16*		570320	173,60
	H 20*		570350	173,60
	H 26*		570370	173,60
	H 32		570380	173,60
	TH 16*		570460	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	TH 40		570485	255,80
	TH 50 (PZ-S)		572400	669,00
	TH 63 (PZ-S)		572405	669,00
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 32 S (PR-2B)	Z8	574798 R	158,20
	U 16*		570765	180,70
	U 20*		570775	180,70
	U 26* ⁽¹²⁾		570750	211,20
	U 32		570785	211,20
	U 40		570790	257,90
	U 50		570795	310,00
	U 63 (PR-3B)	Z4	572837 R	772,00
	U 63 (PZ-S)		572365	669,00
CGR DYNAFLU PER	H 12*		570300	173,60
	H 16*		570320	173,60
	H 20*		570350	173,60
	H 25*		570360	173,60
	RFz 12*		571320	201,00
	RFz 16*		571325	201,00
	RFz 20*		571330	201,00
CHIALI CHIALIPEX	RFz 25		571335	201,00
	TH 16*		570460	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	TH 40		570485	255,80
	TH 50 (PZ-S)		572400	669,00
CHIBRO Pressfitting Cuni	TH 63 (PZ-S)		572405	669,00
	M 15		570110	159,90
	M 18		570120	159,90
	M 22		570130	159,90
	M 28		570140	159,90
	M 35		570150	159,90
	M 42 (PR-3S)	Z2	572706 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00
	M 76,1 XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579101 R	1.213,00
	M 88,9 G XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579110 R	1.416,00
	M 108,0 G XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579111 R	1.416,00
	M 15 S (PR-2B)	Z8	574738 R	131,20
	M 18 S (PR-2B)	Z8	574740 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20
CHIBRO Pressfitting Inox	M 15		570110	159,90
	M 18		570120	159,90
	M 22		570130	159,90
	M 28		570140	159,90
	M 35		570150	159,90
	M 42 (PR-3S)	Z2	572706 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00
	M 76,1 XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579101 R	1.213,00
	M 88,9 G XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579110 R	1.416,00
	M 108,0 G XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579111 R	1.416,00
	M 15 S (PR-2B)	Z8	574738 R	131,20
	M 18 S (PR-2B)	Z8	574740 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20
Climatrix Climatrix Rhinopex	H 16*		570320	173,60
	H 20*		570350	173,60
	U 16*		570765	180,70
	U 20*		570775	180,70
	U 26* ⁽¹²⁾		570750	211,20
	TH 14*		570455	192,90
	TH 16*		570460	192,90
	TH 18*		570465	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	TH 14 S (PR-2B)**	Mini Z8	574778 R	158,20
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 18 S (PR-2B)**	Z8	574786 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 32 S (PR-2B)	Z8	574798 R	158,20
Climatrix Variotherm System TH ClouSet	TH 11,6*		570482	192,90
	TH 16*		570460	192,90
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 16*		570460	192,90
	TH 18*		570465	192,90
	TH 20*		570470	192,90
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 18 S (PR-2B)**	Z8	574786 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
Comap PEX Press	RFz 12*		571320	201,00
	RFz 16*		571325	201,00
	RFz 20*		571330	201,00
	RFz 25		571335	201,00
Comap Multiskin	TH 14*		570455	192,90
	TH 16*		570460	192,90
	TH 18*		570465	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	THL 32		570487	192,90
	TH 40		570485	255,80
	TH 50 (PZ-S)		572400	669,00
	TH 63 (PZ-S)		572405	669,00
	THz 75 (PR-3B)	Z4	572829 R	641,00
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 32 S (PR-2B)	Z8	574798 R	158,20
	U 14*		570760	180,70
	U 16*		570765	180,70
	U 18*		570770	180,70
	U 20*		570775	180,70
	U 32		570785	211,20
	U 40		570790	257,90
	U 50		570795	310,00
	U 63 (PR-3B)	Z4	572837 R	772,00
	U 63 (PZ-S)		572365	669,00
	U 75 (PR-3B)	Z4	572828 R	680,00
	H 14*		570310	173,60
	H 16*		570320	173,60
	H 18*		570340	173,60
	H 20*		570350	173,60
	H 26*		570370	173,60
	H 32		570380	173,60
	H 40 (PZ-46)		570390	586,00
Comap Multiskin Gas	TH 16*		570460	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	THL 32		570487	192,90
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 32 S (PR-2B)	Z8	574798 R	158,20
	U 16*		570765	180,70
	U 20*		570775	180,70
	U 32		570785	211,20
	H 16*		570320	173,60
COMISA Press System	H 20*		570350	173,60
	H 26*		570370	173,60
	H 32		570380	173,60
	TH 14*		570455	192,90
	TH 16*		570460	192,90
	TH 18*		570465	192,90
	TH 20*		570470	192,90
	TH 25*		570495	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	TH 40		570485	255,80
	TH 50 (PZ-S)		572400	669,00
	TH 63 (PZ-S)		572405	669,00
COMISA Press System Gas	TH 14 S (PR-2B)**	Z8	574778 R	158,20
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 18 S (PR-2B)**	Z8	574786 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 25 S (PR-2B)**	Z8	574792 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 32 S (PR-2B)**	Z8	574798 R	158,20
	H 14*		570310	173,60
	H 16*		570320	173,60
	H 18*		570340	173,60
	H 20*		570350	173,60
	H 26*		570370	173,60
	H 32		570380	173,60
	B 14*		570845	210,20
	B 16*		570850	210,20
	B 18*		570855	210,20
	B 20*		570860	210,20
CONEL CONNECT INOX	B 26		570870	232,50
	B 32		570880	232,50
	TH 16*		570460	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
COMISA Press System Gas	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 32 S (PR-2B)	Z8	574798 R	158,20
	M 15		570110	159,90
	M 18		570120	159,90
	M 22		570130	159,90
	M 42 (PR-3S)	Z2	572706 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00
	V 15		570115	159,90
	V 18		570125	159,90
CONEL CONNECT INOX	V 22		570135	159,90
	V 42 (PR-2B)	Z2	572850 R	334,00
	V 54 (PR-2B)	Z2	572851 R	361,00

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€	System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€
CONEL CONNECT MULTI	F 16*		570717	183,80	Conex Bänninger >B- Flex	F 16*		570717	183,80
	F 20*		570727	183,80		F 18*		570720	183,80
	F 26*		570730	199,00		F 20*		570727	183,80
	F 32		570735	199,00		F 32		570735	199,00
	F 16 S (PR-2B)**	Z8	574728 R	150,80		F 16 S (PR-2B)**	Z8	574728 R	150,80
	F 20 S (PR-2B)**	Z8	574730 R	150,80		F 20 S (PR-2B)**	Z8	574730 R	150,80
	F 26 S (PR-2B)**	Z8	574732 R	163,20		F 32 S (PR-2B)	Z8	574734 R	163,20
	F 32 S (PR-2B)**	Z8	574734 R	163,20		H 16*		570320	173,60
	H 16*		570320	173,60		H 18*		570340	173,60
	H 20*		570350	173,60		H 20*		570350	173,60
	H 26*		570370	173,60		H 25*		570360	173,60
	H 32		570380	173,60		H 32		570380	173,60
	TH 16*		570460	192,90		RFz 16*		571325	201,00
	TH 20*		570470	192,90		RFz 18*		571327	201,00
	TH 26*		570475	192,90		RFz 20*		571330	201,00
	TH 32		570480	192,90		RFz 25		571335	201,00
	TH 16 S (PR-2B)**	Z8	574782 R	158,20		RFz 32		571340	201,00
	TH 20 S (PR-2B)**	Z8	574788 R	158,20		TH 16*		570460	192,90
	TH 26 S (PR-2B)**	Z8	574794 R	158,20		TH 18*		570465	192,90
	TH 32 S (PR-2B)**	Z8	574798 R	158,20		TH 20*		570470	192,90
	U 16*		570765	180,70		TH 25*		570495	192,90
	U 20*		570775	180,70		TH 32		570480	192,90
	U 25*		570780	180,70		TH 16 S (PR-2B)**	Z8	574782 R	158,20
	U 32		570785	211,20		TH 18 S (PR-2B)**	Z8	574786 R	158,20
	VP 16*		570910	191,90		TH 20 S (PR-2B)**	Z8	574788 R	158,20
	VP 20*		570915	191,90		TH 25 S (PR-2B)**	Z8	574792 R	158,20
	VP 32		570925	212,20		TH 32 S (PR-2B)	Z8	574798 R	158,20
CONEL CONNECT MV2	F 16*		570717	183,80		U 16*		570765	180,70
	F 20*		570727	183,80		U 18*		570770	180,70
	F 26*		570730	199,00		U 20*		570775	180,70
	F 32		570735	199,00		U 25*		570780	180,70
	F 16 S (PR-2B)**	Z8	574728 R	150,80		U 32		570785	211,20
	F 20 S (PR-2B)**	Z8	574730 R	150,80		U 40		570790	257,90
	F 26 S (PR-2B)**	Z8	574732 R	163,20		U 50		570795	310,00
	F 32 S (PR-2B)**	Z8	574734 R	163,20		U 63 (PZ-S)		572365	669,00
	TH 16*		570460	192,90		U 63 (PR-3B)	Z4	572837 R	772,00
	TH 20*		570470	192,90		U 75 (PR-3B)	Z4	572828 R	680,00
	TH 26*		570475	192,90		U 16 S (PR-2B)**	Z8	574860 R	148,20
	TH 32		570480	192,90		U 18 S (PR-2B)**	Z8	574870 R	148,20
	TH 16 S (PR-2B)**	Z8	574782 R	158,20		U 20 S (PR-2B)**	Z8	574862 R	148,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20		U 25 S (PR-2B)**	Z8	574864 R	148,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20		U 32 S (PR-2B)	Z8	574868 R	173,20
Conex Bänninger <A> Press Inox (304)	TH 32 S (PR-2B)**	Z8	574798 R	158,20	Conex Bänninger >B- Flex Gas	F 16*		570717	183,80
	M 15		570110	159,90		F 18*		570720	183,80
	M 18		570120	159,90		F 20*		570727	183,80
	M 22		570130	159,90		F 32		570735	199,00
	M 28		570140	159,90		F 16 S (PR-2B)**	Z8	574728 R	150,80
	M 35		570150	159,90		F 20 S (PR-2B)**	Z8	574730 R	150,80
	M 42 (PZ-4G)		570160	515,00		F 32 S (PR-2B)	Z8	574734 R	163,20
	M 54 (PZ-4G)		570170	515,00		H 16*		570320	173,60
	M 35 (PR-3S)	Z2	572727 R	696,00		H 18*		570340	173,60
	M 42 (PR-3S)	Z2	572706 R	696,00		H 20*		570350	173,60
	M 54 (PR-3S)	Z2	572708 R	696,00		H 25*		570360	173,60
	M 15 S (PR-2B)	Z8	574738 R	131,20		H 32		570380	173,60
	M 18 S (PR-2B)	Z8	574740 R	131,20		RFz 16*		571325	201,00
	M 22 S (PR-2B)	Z8	574742 R	131,20		RFz 18*		571327	201,00
	M 28 S (PR-2B)	Z8	574744 R	131,20		RFz 20*		571330	201,00
	M 35 S (PR-2B)	Z8	574746 R	131,20		RFz 25		571335	201,00
Conex Bänninger <A> Press Inox (316L)						RFz 32		571340	201,00
	M 15		570110	159,90		TH 16*		570460	192,90
	M 18		570120	159,90		TH 18*		570465	192,90
	M 22		570130	159,90		TH 20*		570470	192,90
	M 28		570140	159,90		TH 25*		570495	192,90
	M 35		570150	159,90		TH 32		570480	192,90
	M 42 (PZ-4G)		570160	515,00		TH 16 S (PR-2B)**	Z8	574782 R	158,20
	M 54 (PZ-4G)		570170	515,00		TH 18 S (PR-2B)**	Z8	574786 R	158,20
	M 42 (PR-3S)	Z2	572706 R	696,00		TH 20 S (PR-2B)**	Z8	574788 R	158,20
	M 35 (PR-3S)	Z2	572727 R	696,00		TH 25 S (PR-2B)**	Z8	574792 R	158,20
	M 54 (PR-3S)	Z2	572708 R	696,00		TH 32 S (PR-2B)	Z8	574798 R	158,20
	M 15 S (PR-2B)	Z8	574738 R	131,20		U 16*		570765	180,70
	M 18 S (PR-2B)	Z8	574740 R	131,20		U 18*		570770	180,70
	M 22 S (PR-2B)	Z8	574742 R	131,20		U 20*		570775	180,70
	M 28 S (PR-2B)	Z8	574744 R	131,20		U 25*		570780	180,70
	M 35 S (PR-2B)	Z8	574746 R	131,20		U 32		570785	211,20
						U 16 S (PR-2B)**	Z8	574860 R	148,20
						U 18 S (PR-2B)**	Z8	574870 R	148,20
						U 20 S (PR-2B)**	Z8	574862 R	148,20
						U 25 S (PR-2B)**	Z8	574864 R	148,20
						U 32 S (PR-2B)	Z8	574868 R	173,20

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 227. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 227. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 230.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC, see page 238.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

¹³⁾ Only pressing tongs/S pressing rings (PR-2B) from designation "125" (1st quarter of 2025), "225" (2nd quarter of 2025) etc. can be used.
The designation is stamped on every pressing jaw.

The suitability of REMS pressing tools for pressfitting systems: Date 13.10.2025. For the updated situation regarding suitability status check our website:
www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 288 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
Conex Bänninger >B< MaxiPro	BMP ¼"		571700 R	190,90
	BMP ¾"		571702 R	190,90
	BMP ½"		571704 R	190,90
	BMP ⅝"		571706 R	190,90
	BMP ¾"		571708 R	190,90
	BMP ⅞"		571710 R	190,90
	BMP 1"		571712 R	190,90
	BMP 1⅙"		571714 R	190,90
	BMP 1 ⅓" (PR-3S)	Z2	572740 R	696,00
	BMP 1 ⅝" (PR-3S)	Z2	572718 R	696,00
	BMP ¼" S (PR-2B)	Z8	574810 R	156,60
	BMP 8 / BMP ⅝" S (PR-2B)	Z8	574712 R	156,60
	BMP ¾" S (PR-2B)	Z8	574812 R	156,60
	BMP ½" S (PR-2B)	Z8	574814 R	156,60
	BMP ⅝" S (PR-2B)	Z8	574816 R	156,60
	BMP ¾" S (PR-2B)	Z8	574818 R	156,60
	BMP ⅞" S (PR-2B)	Z8	574820 R	156,60
	BMP 1" S (PR-2B)	Z8	574822 R	156,60
	BMP 1⅙" S (PR-2B)	Z8	574824 R	156,60
	V 15		570115	159,90
	V 18		570125	159,90
	V 22		570135	159,90
	V 28		570145	159,90
	V 35		570155	159,90
	V 42		570165	373,00
	V 54		570175	383,00
Conex Bänninger >B< One (ITA) water & gas	V 42 (PR-2B)	Z2	572850 R	334,00
	V 54 (PR-2B)	Z2	572851 R	361,00
	V 15 S (PR-2B)	Z8	574752 R	131,20
	V 18 S (PR-2B)	Z8	574756 R	131,20
	V 22 S (PR-2B)	Z8	574758 R	131,20
	V 28 S (PR-2B)	Z8	574760 R	131,20
	V 35 S (PR-2B)	Z8	574762 R	131,20
	V 12		570107	159,90
	V 14		570132	159,90
	V 15		570115	159,90
	V 16		570137	159,90
	V 18		570125	159,90
	V 22		570135	159,90
	V 28		570145	159,90
	V 35		570155	159,90
	V 42		570165	373,00
	V 54		570175	383,00
	V 42 (PR-2B)	Z2	572850 R	334,00
	V 54 (PR-2B)	Z2	572851 R	361,00
	V 12 S (PR-2B)	Z8	574748 R	131,20
	V 14 S (PR-2B)	Z8	574750 R	131,20
	V 15 S (PR-2B)	Z8	574752 R	131,20
	V 16 S (PR-2B)	Z8	574754 R	131,20
	V 18 S (PR-2B)	Z8	574756 R	131,20
	V 22 S (PR-2B)	Z8	574758 R	131,20
	V 28 S (PR-2B)	Z8	574760 R	131,20
	V 35 S (PR-2B)	Z8	574762 R	131,20
Conex Bänninger >B< Press (EN) ⁹⁾	M 15		570110	159,90
	M 22		570130	159,90
	M 28		570140	159,90
	VFz 64,0 (PR-3B)	Z5	572815 R	641,00
	CBVFz 66,7 (PR-3B)	Z5	572847 R	641,00
	VFz 76,1 (PR-3B) ⁴⁾	Z5	572816 R	641,00
	VFz 88,9 (PR-3B) ⁴⁾	Z5	572817 R	680,00
	VFz 108,0 (PR-3B) ⁴⁾	Z5	572818 R	680,00
	VUS ½" (OD 15,9 mm)		571770	192,90
	VUS ¾" (OD 22,2 mm)		571775	192,90
	VUS 1" (OD 28,6 mm)		571780	192,90
	VUS 1¼" (OD 34,9 mm)		571785	192,90
	VUS 1½" (OD 41,3 mm)		571790	373,00
Conex Bänninger >B< Press (ASTM) ¹⁰⁾	VUS 2" (OD 54,0 mm)		571795	383,00
	VUS ½" S (PR-2B) (OD 15,9 mm)	Z8	574764 R	158,20
	VUS ¾" S (PR-2B) (OD 22,2 mm)	Z8	574766 R	158,20
	VUS 1" S (PR-2B) (OD 28,6 mm)	Z8	574768 R	158,20
	VUS 1¼" S (PR-2B) (OD 34,9 mm)	Z8	574770 R	158,20
	VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z5	572819 R	641,00
	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820 R	641,00
	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821 R	680,00
	V 15		570115	159,90
	V 18		570125	159,90
	V 22		570135	159,90
	V 28		570145	159,90
	V 35		570155	159,90
Conex Bänninger >B< Press Carbon	V 42		570165	373,00
	V 54		570175	383,00
	V 42 (PR-2B)	Z2	572850 R	334,00
	V 54 (PR-2B)	Z2	572851 R	361,00
	V 15 S (PR-2B)	Z8	574752 R	131,20
	V 18 S (PR-2B)	Z8	574756 R	131,20
	V 22 S (PR-2B)	Z8	574758 R	131,20
	V 28 S (PR-2B)	Z8	574760 R	131,20
	V 35 S (PR-2B)	Z8	574762 R	131,20
	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100 R	1.107,00
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108 R	1.213,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	CBM 88,9 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579144 R	1.416,00
Conex Bänninger >B< Press Carbon XL	CBM 108,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579146 R	1.416,00

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
Conex Bänninger >B< Press Gas (EN) ⁹⁾	V 12		570107	159,90
	V 14		570132	159,90
	V 15		570115	159,90
	V 16		570137	159,90
	V 18		570125	159,90
	V 22		570135	159,90
	V 28		570145	159,90
	V 35		570155	159,90
	V 42		570165	373,00
	V 54		570175	383,00
	V 42 (PR-2B)	Z2	572850 R	334,00
	V 54 (PR-2B)	Z2	572851 R	361,00
	V 12 S (PR-2B)	Z8	574748 R	131,20
	V 14 S (PR-2B)	Z8	574750 R	131,20
	V 15 S (PR-2B)	Z8	574752 R	131,20
	V 16 S (PR-2B)	Z8	574754 R	131,20
	V 18 S (PR-2B)	Z8	574756 R	131,20
	V 22 S (PR-2B)	Z8	574758 R	131,20
	V 28 S (PR-2B)	Z8	574760 R	131,20
	V 35 S (PR-2B)	Z8	574762 R	131,20
	VI ½" S (PR-2B) (OD 14,7 mm)	Z8	574850 R	156,60
	VI ¾" S (PR-2B) (OD 21,0 mm)	Z8	574852 R	156,60
	VI 1" S (PR-2B) (OD 27,4 mm)	Z8	574854 R	156,60
	V 15		570115	159,90
	V 18		570125	159,90
	V 22		570135	159,90
	V 28		570145	159,90
Conex Bänninger >B< Press Inox	V 35		570155	159,90
	V 42		570165	373,00
	V 54		570175	383,00
	V 42 (PR-2B)	Z2	572850 R	334,00
	V 54 (PR-2B)	Z2	572851 R	361,00
	V 15 S (PR-2B)	Z8	574752 R	131,20
	V 18 S (PR-2B)	Z8	574756 R	131,20
	V 22 S (PR-2B)	Z8	574758 R	131,20
	V 28 S (PR-2B)	Z8	574760 R	131,20
	V 35 S (PR-2B)	Z8	574762 R	131,20
	V 15		570115	159,90
	V 18		570125	159,90
	V 22		570135	159,90
	V 28		570145	159,90
	V 35		570155	159,90
	V 42		570165	373,00
	V 54		570175	383,00
	V 42 (PR-2B)	Z2	572850 R	334,00
	V 54 (PR-2B)	Z2	572851 R	361,00
	V 15 S (PR-2B)	Z8	574752 R	131,20
	V 18 S (PR-2B)	Z8	574756 R	131,20
	V 22 S (PR-2B)	Z8	574758 R	131,20
	V 28 S (PR-2B)	Z8	574760 R	131,20
	V 35 S (PR-2B)	Z8	574762 R	131,20
	V 15		570115	159,90
	V 18		570125	159,90
Conex Bänninger >B< Press Inox 304	V 22		570135	159,90
	V 28		570145	159,90
	V 35		570155	159,90
	V 42		570165	373,00
	V 54		570175	383,00
	V 42 (PR-2B)	Z2	572850 R	334,00
	V 54 (PR-2B)	Z2	572851 R	361,00
	V 15 S (PR-2B)	Z8	574752 R	131,20
	V 18 S (PR-2B)	Z8	574756 R	131,20
	V 22 S (PR-2B)	Z8	574758 R	131,20
	V 28 S (PR-2B)	Z8	574760 R	131,20
	V 35 S (PR-2B)	Z8	574762 R	131,20
	V 15		570115	159,90
Conex Bänninger >B< Press Inox 316L	V 18		570125	159,90
	V 22		570135	159,90
	V 28		570145	159,90
	V 35		570155	159,90
	V 42		570165	373,00
	V 54		570175	383,00
	V 42 (PR-2B)	Z2	572850 R	334,00
	V 54 (PR-2B)	Z2	572851 R	361,00
	V 15 S (PR-2B)	Z8	574752 R	131,20
	V 18 S (PR-2B)	Z8	574756 R	131,20
	V 22 S (PR-2B)	Z8	574758 R	131,20
	V 28 S (PR-2B)	Z8	574760 R	131,20
	V 35 S (PR-2B)	Z8	574762 R	131,20
Conex Bänninger >B< Press Inox XL	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100 R	1.107,00
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108 R	1.213,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	CBM 88,9 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579144 R	1.416,00
	CBM 108,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579146 R	1.416,00
	V 15		570115	159,90
	V 18		570125	159,90
	V 22		570135	159,90
	V 28		570145	159,90
	V 15 S (PR-2B)	Z8	574752 R	131,20
	V 18 S (PR-2B)	Z8	574756 R	131,20
	V 22 S (PR-2B)	Z8	574758 R	131,20
	V 28 S (PR-2B)	Z8	574760 R	131,20
D				
Debrunner Acifer d-a Presssystem C-Stahl	M 12		570100	159,90
	M 15		570110	159,90
	M 18		570120	159,90
	M 22		570130	159,90
	M 28		570140	159,90
	M 35		570150	159,90
	M 42 (PR-3S)	Z2	572706 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
	M 12 S (PR-2B)	Z8	574736 R	131,20
	M 15 S (PR-2B)	Z8	574738 R	131,20
Conex Bänninger >B< Press Carbon XL	M 18 S (PR-2B)	Z8	574740 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
DUOPIPE SYSTEMS	U 16*		570765	180,70	EFFEBI	V 12		570107	159,90
DUOFIL MKSYSTEM	U 18*		570770	180,70	EFFEBI-PRESS	V 15		570115	159,90
	U 20*		570775	180,70	Aisi316	V 18		570125	159,90
	U 25*		570780	180,70	System V Profile	V 22		570135	159,90
	U 32		570785	211,20		V 28		570145	159,90
	U 16 S (PR-2B)**	Z8	574860 R	148,20		V 35		570155	159,90
	U 18 S (PR-2B)**	Z8	574870 R	148,20		V 42		570165	373,00
	U 20 S (PR-2B)**	Z8	574862 R	148,20		V 42 (PR-2B)	Z2	572850 R	334,00
	U 25 S (PR-2B)**	Z8	574864 R	148,20		V 54		570175	383,00
	U 32 S (PR-2B)	Z8	574868 R	173,20		V 54 (PR-2B)	Z2	572851 R	361,00
DW Verbundrohr	U 16*		570765	180,70		V 12 S (PR-2B)	Z8	574748 R	131,20
multitubo systems	U 18*		570770	180,70		V 15 S (PR-2B)	Z8	574752 R	131,20
	U 20*		570775	180,70		V 18 S (PR-2B)	Z8	574756 R	131,20
	U 25*		570780	180,70		V 22 S (PR-2B)	Z8	574758 R	131,20
	U 32		570785	211,20		V 28 S (PR-2B)	Z8	574760 R	131,20
	U 40		570790	257,90		V 35 S (PR-2B)	Z8	574762 R	131,20
	U 50		570795	310,00	EFFEBI	M 12		570100	159,90
	U 63 (PR-3B)	Z4	572837 R	772,00	EFFEBI-PRESS	M 15		570110	159,90
	U 63 (PZ-S)		572365	669,00	Carbon-S	M 18		570120	159,90
	U 75 (PR-3B)	Z4	572828 R	680,00	System M Profile ¹⁾	M 22		570130	159,90
E						M 28		570140	159,90
EBRILLE	U 16*		570765	180,70		M 35		570150	159,90
Isomonflex	U 20*		570775	180,70		M 42 (PR-3S)	Z2	572706 R	696,00
	U 25*		570780	180,70		M 54 (PR-3S)	Z2	572708 R	696,00
	U 26* ¹²⁾		570750	211,20		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	U 32		570785	211,20		M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
	U 16 S (PR-2B)**	Z8	574860 R	148,20		M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
	U 20 S (PR-2B)**	Z8	574862 R	148,20		M 12 S (PR-2B)	Z8	574736 R	131,20
	U 25 S (PR-2B)**	Z8	574864 R	148,20		M 15 S (PR-2B)	Z8	574738 R	131,20
	U 26 S (PR-2B)**	Z8	574866 R	173,20		M 18 S (PR-2B)	Z8	574740 R	131,20
	U 32 S (PR-2B)	Z8	574868 R	173,20		M 22 S (PR-2B)	Z8	574742 R	131,20
	H 26*		570370	173,60		M 28 S (PR-2B)	Z8	574744 R	131,20
	TH 26*		570475	192,90		M 35 S (PR-2B)	Z8	574746 R	131,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20	EFFEBI	V 12		570107	159,90
EBRILLE	U 16*		570765	180,70	EFFEBI-PRESS	V 15		570115	159,90
Monflex	U 20*		570775	180,70	Carbon-S	V 18		570125	159,90
	U 25*		570780	180,70	System V Profile	V 22		570135	159,90
	U 26* ¹²⁾		570750	211,20		V 28		570145	159,90
	U 32		570785	211,20		V 35		570155	159,90
	U 16 S (PR-2B)**	Z8	574860 R	148,20		V 42		570165	373,00
	U 20 S (PR-2B)**	Z8	574862 R	148,20		V 42 (PR-2B)	Z2	572850 R	334,00
	U 25 S (PR-2B)**	Z8	574864 R	148,20		V 54		570175	383,00
	U 26 S (PR-2B)**	Z8	574866 R	173,20		V 54 (PR-2B)	Z2	572851 R	361,00
	U 32 S (PR-2B)	Z8	574868 R	173,20		V 12 S (PR-2B)	Z8	574748 R	131,20
	H 26*		570370	173,60		V 15 S (PR-2B)	Z8	574752 R	131,20
	TH 26*		570475	192,90		V 18 S (PR-2B)	Z8	574756 R	131,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20		V 22 S (PR-2B)	Z8	574758 R	131,20
EFFEBI	M 15		570110	159,90		V 28 S (PR-2B)	Z8	574760 R	131,20
EFFEBI-PRESS	M 18		570120	159,90		V 35 S (PR-2B)	Z8	574762 R	131,20
Aisi316	M 22		570130	159,90	EFFEBI	V 12		570107	159,90
System M Profile ¹⁾	M 28		570140	159,90	EFFEBI-PRESS	V 15		570115	159,90
	M 35		570150	159,90	COPPER	V 18		570125	159,90
	M 42 (PR-3S)	Z2	572706 R	696,00		V 22		570135	159,90
	M 54 (PR-3S)	Z2	572708 R	696,00		V 28		570145	159,90
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00		V 35		570155	159,90
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00		V 42		570165	373,00
	M 108,0 G XL (PR-3S) ¹³⁾	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00		V 42 (PR-2B)	Z2	572850 R	334,00
	M 15 S (PR-2B)	Z8	574738 R	131,20		V 54		570175	383,00
	M 18 S (PR-2B)	Z8	574740 R	131,20		V 54 (PR-2B)	Z2	572851 R	361,00
	M 22 S (PR-2B)	Z8	574742 R	131,20		V 12 S (PR-2B)	Z8	574748 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20		V 15 S (PR-2B)	Z8	574752 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20		V 18 S (PR-2B)	Z8	574756 R	131,20
						V 22 S (PR-2B)	Z8	574758 R	131,20
						V 28 S (PR-2B)	Z8	574760 R	131,20
						V 35 S (PR-2B)	Z8	574762 R	131,20

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 227. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 227. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 230.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC, see page 238.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

¹³⁾ Only pressing tongs/S pressing rings (PR-2B) from designation "125" (1st quarter of 2025), "225" (2nd quarter of 2025) etc. can be used.

The designation is stamped on every pressing jaw.

The suitability of REMS pressing tools for pressfitting systems: Date 13.10.2025. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 288 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
EFFEBI	V 12		570107	159,90
EFFEBI-PRESS	V 15		570115	159,90
UNICO	V 18		570125	159,90
	V 22		570135	159,90
	V 28		570145	159,90
	V 35		570155	159,90
	V 42		570165	373,00
	V 42 (PR-2B)	Z2	572850 R	334,00
	V 54		570175	383,00
	V 54 (PR-2B)	Z2	572851 R	361,00
	V 12 S (PR-2B)	Z8	574748 R	131,20
	V 15 S (PR-2B)	Z8	574752 R	131,20
	V 18 S (PR-2B)	Z8	574756 R	131,20
	V 22 S (PR-2B)	Z8	574758 R	131,20
	V 28 S (PR-2B)	Z8	574760 R	131,20
	V 35 S (PR-2B)	Z8	574762 R	131,20
EFFEBI	V 12		570107	159,90
EFFEBI-PRESS	V 15		570115	159,90
UNICO	V 18		570125	159,90
(GAS)	V 22		570135	159,90
	V 28		570145	159,90
	V 35		570155	159,90
	V 42		570165	373,00
	V 42 (PR-2B)	Z2	572850 R	334,00
	V 54		570175	383,00
	V 54 (PR-2B)	Z2	572851 R	361,00
	V 12 S (PR-2B)	Z8	574748 R	131,20
	V 15 S (PR-2B)	Z8	574752 R	131,20
	V 18 S (PR-2B)	Z8	574756 R	131,20
	V 22 S (PR-2B)	Z8	574758 R	131,20
	V 28 S (PR-2B)	Z8	574760 R	131,20
	V 35 S (PR-2B)	Z8	574762 R	131,20
EFFEBI	M 15		570110	159,90
PRESSTIGE	M 18		570120	159,90
	M 22		570130	159,90
	M 28		570140	159,90
	M 35		570150	159,90
	M 15 S (PR-2B)	Z8	574738 R	131,20
	M 18 S (PR-2B)	Z8	574740 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20
	V 15		570115	159,90
	V 18		570125	159,90
	V 22		570135	159,90
	V 28		570145	159,90
	V 35		570155	159,90
	V 42		570165	373,00
	V 42 (PR-2B)	Z2	572850 R	334,00
	V 54		570175	383,00
	V 54 (PR-2B)	Z2	572851 R	361,00
	V 15 S (PR-2B)	Z8	574752 R	131,20
	V 18 S (PR-2B)	Z8	574756 R	131,20
	V 22 S (PR-2B)	Z8	574758 R	131,20
	V 28 S (PR-2B)	Z8	574760 R	131,20
	V 35 S (PR-2B)	Z8	574762 R	131,20
EFFEBI	M 15		570110	159,90
PRESSTIGE 4E05	M 18		570120	159,90
	M 22		570130	159,90
	M 28		570140	159,90
	M 35		570150	159,90
	M 42 (PR-3S)	Z2	572706 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00
	M 15 S (PR-2B)	Z8	574738 R	131,20
	M 18 S (PR-2B)	Z8	574740 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20
EFFEBI	M 15		570110	159,90
PRESSTIGE-GAS	M 18		570120	159,90
	M 22		570130	159,90
	M 28		570140	159,90
	M 35		570150	159,90
	M 15 S (PR-2B)	Z8	574738 R	131,20
	M 18 S (PR-2B)	Z8	574740 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20
	V 15		570115	159,90
	V 18		570125	159,90
	V 22		570135	159,90
	V 28		570145	159,90
	V 35		570155	159,90
	V 42		570165	373,00
	V 42 (PR-2B)	Z2	572850 R	334,00
	V 54		570175	383,00
	V 54 (PR-2B)	Z2	572851 R	361,00
	V 15 S (PR-2B)	Z8	574752 R	131,20
	V 18 S (PR-2B)	Z8	574756 R	131,20
	V 22 S (PR-2B)	Z8	574758 R	131,20
	V 28 S (PR-2B)	Z8	574760 R	131,20
	V 35 S (PR-2B)	Z8	574762 R	131,20

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
EFFEBI	TH 16*		570460	192,90
TOF-GAS	TH 20*		570470	192,90
MULTIPINZA	TH 26*		570475	192,90
	TH 32		570480	192,90
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 32 S (PR-2B)**	Z8	574798 R	158,20
	H 16*		570320	173,60
	H 20*		570350	173,60
	H 26*		570370	173,60
	H 32		570380	173,60
	H 40 (PZ-4G)		570390	586,00
	U 16*		570765	180,70
	U 20*		570775	180,70
	U 26* ⁽¹²⁾		570750	211,20
	U 32		570785	211,20
	U 16 S (PR-2B)**	Z8	574860 R	148,20
	U 20 S (PR-2B)**	Z8	574862 R	148,20
	U 26 S (PR-2B)**	Z8	574866 R	173,20
	U 32 S (PR-2B)	Z8	574868 R	173,20
EFFEBI	TH 16*		570460	192,90
TOF	TH 18*		570465	192,90
MULTIPINZA	TH 20*		570470	192,90
	TH 25*		570495	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	TH 40		570485	255,80
	TH 50 (PZ-S)		572400	669,00
	TH 63 (PZ-S)		572405	669,00
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 18 S (PR-2B)**	Z8	574786 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 25 S (PR-2B)**	Z8	574792 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 32 S (PR-2B)**	Z8	574798 R	158,20
	F 16*		570717	183,80
	F 18*		570720	183,80
	F 20*		570727	183,80
	F 26*		570730	199,00
	F 32		570735	199,00
	Fz 40		570742	212,20
	Fz 50		570747	322,00
	F 63 (PZ-S)		572385	669,00
	F 16 S (PR-2B)**	Z8	574728 R	150,80
	F 20 S (PR-2B)**	Z8	574730 R	150,80
	F 26 S (PR-2B)**	Z8	574732 R	163,20
	F 32 S (PR-2B)**	Z8	574734 R	163,20
	H 16*		570320	173,60
	H 18*		570340	173,60
	H 20*		570350	173,60
	H 25*		570360	173,60
	H 26*		570370	173,60
	H 32		570380	173,60
	H 40 (PZ-4G)		570390	586,00
	U 16*		570765	180,70
	U 18*		570770	180,70
	U 20*		570775	180,70
	U 25*		570780	180,70
	U 26* ⁽¹²⁾		570750	211,20
	U 32		570785	211,20
	U 40		570790	257,90
	U 50		570795	310,00
	U 63 (PR-3B)	Z4	572837 R	772,00
	U 63 (PZ-S)		572365	669,00
	U 16 S (PR-2B)**	Z8	574860 R	148,20
	U 18 S (PR-2B)**	Z8	574870 R	148,20
	U 20 S (PR-2B)**	Z8	574862 R	148,20
	U 25 S (PR-2B)**	Z8	574864 R	148,20
	U 26 S (PR-2B)**	Z8	574866 R	173,20
	U 32 S (PR-2B)	Z8	574868 R	173,20
	B 16*		570850	210,20
	B 18*		570855	210,20
	B 20*		570860	210,20
	B 26		570870	232,50
	B 32		570880	232,50
EFIELD	U 16*		570765	180,70
MULTILAYER PRESS	U 18*		570770	180,70
GAS	U 20*		570775	180,70
	U 25*		570780	180,70
	U 32		570785	211,20
EFIELD	U 16*		570765	180,70
MULTILAYER PRESS	U 18*		570770	180,70
WATER	U 20*		570775	180,70
	U 25*		570780	180,70
	U 32		570785	211,20
	U 40		570790	257,90
	U 50		570795	310,00
	U 63 (PZ-S)		572365	669,00
Elkhart	VUS ½" (OD 15,9 mm)		571770	192,90
APOLLOXPRESS	VUS ¾" (OD 22,2 mm)		571775	192,90
Fittings Copper	VUS 1" (OD 28,6 mm)		571780	192,90
and Low-Lead	VUS 1¼" (OD 34,9 mm)		571785	192,90
Brass	VUS 1½" (OD 41,3 mm)		571790	373,00
	VUS 2" (OD 54,0 mm)		571795	383,00
Elkhart	VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z5	572819 R	641,00
APOLLOXPRESS	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820 R	641,00
LD-C Fittings	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821 R	680,00
Copper				

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	
EMMETI GERPEX- FIVPRESS	B 16*		570850	210,20	Esta Rohr simplesta ST V	V 15		570115	159,90	
	B 20*		570860	210,20		V 18		570125	159,90	
	B 26		570870	232,50		V 22		570135	159,90	
	B 32		570880	232,50		V 28		570145	159,90	
	H 16*		570320	173,60		V 35		570155	159,90	
	H 20*		570350	173,60		V 42		570165	373,00	
	TH 16*		570460	192,90		V 54		570175	383,00	
	TH 20*		570470	192,90		V 42 (PR-2B)	Z2	572850 R	334,00	
	TH 26*		570475	192,90		V 54 (PR-2B)	Z2	572851 R	361,00	
	TH 32		570480	192,90		VFz 76,1 (PR-3B)	Z5	572816 R	641,00	
	TH 40		570485	255,80		VFz 88,9 (PR-3B)	Z5	572817 R	680,00	
	TH 50 (PZ-S)		572400	669,00		VFz 108,0 (PR-3B)	Z5	572818 R	680,00	
	TH 63 (PZ-S)		572405	669,00		V 15 S (PR-2B)	Z8	574752 R	131,20	
	U 16*		570765	180,70		V 18 S (PR-2B)	Z8	574756 R	131,20	
	U 20*		570775	180,70		V 22 S (PR-2B)	Z8	574758 R	131,20	
	EMPUR	TH 14*		570455		192,90	V 28 S (PR-2B)	Z8	574760 R	131,20
		TH 15*		570457		192,90	V 35 S (PR-2B)	Z8	574762 R	131,20
		TH 16*		570460		192,90	EUROTUBI EUROPA C-Steel Pressfitting System M-Profile ¹⁾	M 12		570100
TH 17*			570462	192,90	M 15			570110	159,90	
TH 20*			570470	192,90	M 18			570120	159,90	
TH 25*			570495	192,90	M 22			570130	159,90	
TH 14 S (PR-2B)**		Z8	574778 R	158,20	M 28			570140	159,90	
TH 15 S (PR-2B)**		Z8	574780 R	158,20	M 35			570150	159,90	
TH 16 S (PR-2B)**		Z8	574782 R	158,20	M 42 (PR-3S)	Z2		572706 R	696,00	
TH 17 S (PR-2B)**		Z8	574784 R	158,20	M 54 (PR-3S)	Z2		572708 R	696,00	
TH 20 S (PR-2B)**		Z8	574788 R	158,20	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾		579101 R	1.213,00	
TH 25 S (PR-2B)**		Z8	574792 R	158,20	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾		579110 R	1.416,00	
Esta Rohr simplesta SH M		M 15		570110	159,90	M 108,0 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
		M 18		570120	159,90	M 12 S (PR-2B)		Z8	574736 R	131,20
		M 22		570130	159,90	M 15 S (PR-2B)		Z8	574738 R	131,20
		M 28		570140	159,90	M 18 S (PR-2B)		Z8	574740 R	131,20
		M 35		570150	159,90	M 22 S (PR-2B)		Z8	574742 R	131,20
		M 42 (PZ-4G)		570160	515,00	M 28 S (PR-2B)		Z8	574744 R	131,20
	M 54 (PZ-4G)		570170	515,00	M 35 S (PR-2B)	Z8		574746 R	131,20	
	M 42 (PR-3S)	Z2	572706 R	696,00	Esta Rohr simplesta ST M	M 15			570110	159,90
	M 54 (PR-3S)	Z2	572708 R	696,00		M 18		570120	159,90	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00		M 22		570130	159,90	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00		M 28		570140	159,90	
	M 108,0 G XL (PR-3S) ¹⁾	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00		M 35		570150	159,90	
	M 15 S (PR-2B)	Z8	574738 R	131,20		M 42 (PZ-4G)		570160	515,00	
	M 18 S (PR-2B)	Z8	574740 R	131,20		M 54 (PZ-4G)		570170	515,00	
	M 22 S (PR-2B)	Z8	574742 R	131,20		M 42 (PR-3S)	Z2	572706 R	696,00	
	M 28 S (PR-2B)	Z8	574744 R	131,20		M 54 (PR-3S)	Z2	572708 R	696,00	
	M 35 S (PR-2B)	Z8	574746 R	131,20		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00	
	Esta Rohr simplesta SH V	V 15		570115		159,90	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
V 18			570125	159,90		M 108,0 G XL (PR-3S) ¹⁾	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00	
V 22			570135	159,90		M 15 S (PR-2B)	Z8	574738 R	131,20	
V 28			570145	159,90		M 18 S (PR-2B)	Z8	574740 R	131,20	
V 35			570155	159,90		M 22 S (PR-2B)	Z8	574742 R	131,20	
V 42			570165	373,00		M 28 S (PR-2B)	Z8	574744 R	131,20	
V 54			570175	383,00		M 35 S (PR-2B)	Z8	574746 R	131,20	
V 42 (PR-2B)		Z2	572850 R	334,00		Esta Rohr simplesta SH V	V 15		570115	159,90
V 54 (PR-2B)		Z2	572851 R	361,00	V 18			570125	159,90	
VFz 76,1 (PR-3B)		Z5	572816 R	641,00	V 22			570135	159,90	
VFz 88,9 (PR-3B)		Z5	572817 R	680,00	V 28			570145	159,90	
VFz 108,0 (PR-3B)		Z5	572818 R	680,00	V 35			570155	159,90	
V 15 S (PR-2B)		Z8	574752 R	131,20	V 42			570165	373,00	
V 18 S (PR-2B)		Z8	574756 R	131,20	V 54			570175	383,00	
V 22 S (PR-2B)		Z8	574758 R	131,20	V 42 (PR-2B)		Z2	572850 R	334,00	
V 28 S (PR-2B)		Z8	574760 R	131,20	V 54 (PR-2B)		Z2	572851 R	361,00	
V 35 S (PR-2B)		Z8	574762 R	131,20	VFz 76,1 (PR-3B)		Z5	572816 R	641,00	
Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.		ECI 1½"		571932	207,10		VFz 88,9 (PR-3B)	Z5	572817 R	680,00
	ECI 2" (PZ-4G)		571934	515,00	VFz 108,0 (PR-3B)		Z5	572818 R	680,00	
	ECI 2½" XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579104 R	1.107,00	V 15 S (PR-2B)		Z8	574752 R	131,20	
	ECI 3" XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579105 R	1.213,00	V 18 S (PR-2B)		Z8	574756 R	131,20	
	ECI 4" XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579106 R	1.416,00	V 22 S (PR-2B)		Z8	574758 R	131,20	
					V 28 S (PR-2B)		Z8	574760 R	131,20	
					V 35 S (PR-2B)		Z8	574762 R	131,20	

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 227. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 227. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 230.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC, see page 238.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

¹³⁾ Only pressing tongs/S pressing rings (PR-2B) from designation "125" (1st quarter of 2025), "225" (2nd quarter of 2025) etc. can be used. The designation is stamped on every pressing jaw.

The suitability of REMS pressing tools for pressfitting systems: Date 13.10.2025. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 288 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
F				
FAR Rubinetterie PRESSFAR	TH 14*		570455	192,90
	TH 16*		570460	192,90
	TH 17*		570462	192,90
	TH 18*		570465	192,90
	TH 20*		570470	192,90
	TH 25*		570495	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	TH 40		570485	255,80
	TH 50 (PZ-S)		572400	669,00
	TH 63 (PZ-S)		572405	669,00
	TH 14 S (PR-2B)**	Z8	574778 R	158,20
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 17 S (PR-2B)**	Z8	574784 R	158,20
	TH 18 S (PR-2B)**	Z8	574786 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 25 S (PR-2B)**	Z8	574792 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 32 S (PR-2B)	Z8	574798 R	158,20
	H 14*		570310	173,60
	H 16*		570320	173,60
	H 18*		570340	173,60
	H 20*		570350	173,60
	H 26*		570370	173,60
	H 32		570380	173,60
	H 40 (PZ-4G)		570390	586,00
	U 14*		570760	180,70
	U 16*		570765	180,70
	U 18*		570770	180,70
	U 20*		570775	180,70
	U 25*		570780	180,70
	U 26* ⁽¹²⁾		570750	211,20
	U 32		570785	211,20
	U 40		570790	257,90
	U 50		570795	310,00
	U 63 (PR-3B)	Z4	572837 R	772,00
	U 63 (PZ-S)		572365	669,00
	U 14 S (PR-2B)**	Z8	574858 R	148,20
	U 16 S (PR-2B)**	Z8	574860 R	148,20
	U 18 S (PR-2B)**	Z8	574870 R	148,20
	U 20 S (PR-2B)**	Z8	574862 R	148,20
	U 25 S (PR-2B)**	Z8	574864 R	148,20
	U 26 S (PR-2B)**	Z8	574866 R	173,20
	U 32 S (PR-2B)	Z8	574868 R	173,20
F.B.Q. BARONIO BQ PRESS SOLAR	V 12		570107	159,90
	V 14		570132	159,90
	V 15		570115	159,90
	V 16		570137	159,90
	V 18		570125	159,90
	V 22		570135	159,90
	V 28		570145	159,90
	V 35		570155	159,90
	V 42		570165	373,00
	V 42 (PR-2B)	Z2	572850 R	334,00
	V 54		570175	383,00
	V 54 (PR-2B)	Z2	572851 R	361,00
	V 12 S (PR-2B)	Z8	574748 R	131,20
	V 14 S (PR-2B)	Z8	574750 R	131,20
	V 15 S (PR-2B)	Z8	574752 R	131,20
	V 16 S (PR-2B)	Z8	574754 R	131,20
	V 18 S (PR-2B)	Z8	574756 R	131,20
	V 22 S (PR-2B)	Z8	574758 R	131,20
	V 28 S (PR-2B)	Z8	574760 R	131,20
	V 35 S (PR-2B)	Z8	574762 R	131,20
F.B.Q. BARONIO BQ PRESS WATER	V 12		570107	159,90
	V 14		570132	159,90
	V 15		570115	159,90
	V 16		570137	159,90
	V 18		570125	159,90
	V 22		570135	159,90
	V 28		570145	159,90
	V 35		570155	159,90
	V 42		570165	373,00
	V 42 (PR-2B)	Z2	572850 R	334,00
	V 54		570175	383,00
	V 54 (PR-2B)	Z2	572851 R	361,00
	V 12 S (PR-2B)	Z8	574748 R	131,20
	V 14 S (PR-2B)	Z8	574750 R	131,20
	V 15 S (PR-2B)	Z8	574752 R	131,20
	V 16 S (PR-2B)	Z8	574754 R	131,20
	V 18 S (PR-2B)	Z8	574756 R	131,20
	V 22 S (PR-2B)	Z8	574758 R	131,20
	V 28 S (PR-2B)	Z8	574760 R	131,20
	V 35 S (PR-2B)	Z8	574762 R	131,20
F.B.Q. BARONIO BQ PRESS GAS	V 12		570107	159,90
	V 14		570132	159,90
	V 15		570115	159,90
	V 16		570137	159,90
	V 18		570125	159,90
	V 22		570135	159,90
	V 28		570145	159,90
	V 35		570155	159,90
	V 42		570165	373,00
	V 42 (PR-2B)	Z2	572850 R	334,00
	V 54		570175	383,00
	V 54 (PR-2B)	Z2	572851 R	361,00
	V 12 S (PR-2B)	Z8	574748 R	131,20
	V 14 S (PR-2B)	Z8	574750 R	131,20
	V 15 S (PR-2B)	Z8	574752 R	131,20
	V 16 S (PR-2B)	Z8	574754 R	131,20
	V 18 S (PR-2B)	Z8	574756 R	131,20
	V 22 S (PR-2B)	Z8	574758 R	131,20
	V 28 S (PR-2B)	Z8	574760 R	131,20
	V 35 S (PR-2B)	Z8	574762 R	131,20

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
FERCOFLOOR DUO Press FERCO PEX	Rfz 16*		571325	201,00
	Rfz 20*		571330	201,00
	Rfz 25		571335	201,00
	Rfz 32		571340	201,00
	TH 16*		570460	192,90
	TH 20*		570470	192,90
	TH 25*		570495	192,90
	TH 32		570480	192,90
	TH 40		570485	255,80
	TH 50 (PZ-S)		572400	669,00
	TH 63 (PZ-S)		572405	669,00
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
FERCOFLOOR DUO Press MULTIFER	TH 25 S (PR-2B)**	Z8	574792 R	158,20
	TH 32 S (PR-2B)**	Z8	574798 R	158,20
	Rfz 16*		571325	201,00
	Rfz 20*		571330	201,00
	Rfz 25		571335	201,00
	Rfz 32		571340	201,00
	TH 16*		570460	192,90
	TH 20*		570470	192,90
	TH 25*		570495	192,90
	TH 32		570480	192,90
	TH 40		570485	255,80
	TH 50 (PZ-S)		572400	669,00
	TH 63 (PZ-S)		572405	669,00
FERRO systems BRASELI GPF GAS	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 25 S (PR-2B)**	Z8	574792 R	158,20
	TH 32 S (PR-2B)	Z8	574798 R	158,20
	U 16*		570765	180,70
	U 18*		570770	180,70
	U 20*		570775	180,70
	U 25*		570780	180,70
	U 32		570785	211,20
	U 40		570790	257,90
	U 50		570795	310,00
	U 63 (PZ-S)		572365	669,00
	U 16 S (PR-2B)**	Z8	574860 R	148,20
FERRO systems BRASELI GPF MULT Pressfitting MULTICAPA	U 18 S (PR-2B)**	Z8	574870 R	148,20
	U 20 S (PR-2B)**	Z8	574862 R	148,20
	U 25 S (PR-2B)**	Z8	574864 R	148,20
	U 32 S (PR-2B)	Z8	574868 R	173,20
	U 16*		570765	180,70
	U 18*		570770	180,70
	U 20*		570775	180,70
	U 25*		570780	180,70
	U 32		570785	211,20
	U 40		570790	257,90
	U 50		570795	310,00
	U 16 S (PR-2B)**	Z8	574860 R	148,20
	U 18 S (PR-2B)**	Z8	574870 R	148,20
FERRO systems BRASELI GPF PPSU Pressfitting PEX y MULTICAPA	U 20 S (PR-2B)**	Z8	574862 R	148,20
	U 25 S (PR-2B)**	Z8	574864 R	148,20
	U 32 S (PR-2B)	Z8	574868 R	173,20
	U 16*		570765	180,70
	U 18*		570770	180,70
	U 20*		570775	180,70
	U 25*		570780	180,70
	U 32		570785	211,20
	U 40		570790	257,90
	U 50		570795	310,00
	U 16 S (PR-2B)**	Z8	574860 R	148,20
	U 18 S (PR-2B)**	Z8	574870 R	148,20
	U 20 S (PR-2B)**	Z8	574862 R	148,20
FERRO systems BRASELI GPF PRESS Pressfitting PEX	U 25 S (PR-2B)**	Z8	574864 R	148,20
	U 32 S (PR-2B)	Z8	574868 R	173,20
	Rfz 16*		571325	201,00
	Rfz 20*		571330	201,00
	Rfz 25		571335	201,00
	Rfz 32		571340	201,00
FILINOX Filpress	FTB 15		571432	236,50
	FTB 18		571434	236,50
	FTB 22		571436	236,50
	FTB 28		571438	236,50
	M 42 (PR-3S)	Z2	572706 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00
	M 76,1 XL (PR-3S)	Z7 XL 45 kN ⁽⁴⁾	579101 R	1.213,00
	M 88,9 G XL (PR-3S)	Z7 XL 45 kN ⁽⁴⁾	579110 R	1.416,00
	M 108,0 G XL (PR-3S)	Z7 XL 45 kN ⁽⁴⁾	579111 R	1.416,00
FILINOX Instalpress Steel	M 15		570110	159,90
	M 18		570120	159,90
	M 22		570130	159,90
	M 28		570140	159,90
	M 35		570150	159,90
	M 42 (PR-3S)	Z2	572706 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00
	M 76,1 XL (PR-3S)	Z7 XL 45 kN ⁽⁴⁾	579101 R	1.213,00
	M 88,9 G XL (PR-3S)	Z7 XL 45 kN ⁽⁴⁾	579110 R	1.416,00
	M 108,0 G XL (PR-3S)	Z7 XL 45 kN ⁽⁴⁾	579111 R	1.416,00
	M 15 S (PR-2B)	Z8	574738 R	131,20
	M 18 S (PR-2B)	Z8	574740 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20
FERRO systems	M 28 S (PR-2B)	Z8	574744 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
FILINOX Instalpress Inox	M 15		570110	159,90	FORZA GAS CRIMP (AUS)	K16/P18*		572600	201,00
	M 18		570120	159,90		K/20*		572605	201,00
	M 22		570130	159,90		K/25*		572610	201,00
	M 28		570140	159,90		K32		572615	201,00
	M 35		570150	159,90		K1/40		572620	201,00
	M 42 (PR-3S)		572706 R	696,00		K1/50		572625	330,00
	M 54 (PR-3S)	Z2	572708 R	696,00	FORZA COPPER V PRESS (AUS)	VAU 15 (OD 12,7 mm)		572687	164,90
	M 76.1 XL (PR-3S)	Z7 XL 45 kN ⁽⁴⁾	579101 R	1.213,00		VAU 20 (OD 19,1 mm)		572689	164,90
	M 88.9 G XL (PR-3S)	Z7 XL 45 kN ⁽⁴⁾	579110 R	1.416,00		VAU 25 (OD 25,4 mm)		572691	164,90
	M 108.0 G XL (PR-3S)	Z7 XL 45 kN ⁽⁴⁾	579111 R	1.416,00		VAU 32 (OD 31,8 mm)		572693	174,00
	M 15 S (PR-2B)	Z8	574738 R	131,20		VAU 40 (OD 38,1 mm)		572695	257,90
	M 18 S (PR-2B)	Z8	574740 R	131,20		VAU 50 (OD 50,8 mm)		572697	457,00
	M 22 S (PR-2B)	Z8	574742 R	131,20		VAUFz 65 (PR-3B) (OD 63,5 mm)	Z5	572839 R	641,00
	M 28 S (PR-2B)	Z8	574744 R	131,20		VAUFz 80 (PR-3B) (OD 76,2 mm)	Z5	572840 R	641,00
	M 35 S (PR-2B)	Z8	574746 R	131,20		VAUFz 100 (PR-3B) (OD 101,6 mm)	Z5	572841 R	680,00
						VAU 15 S (PR-2B) (OD 12,7 mm)	Z8	574804 R	135,30
						VAU 20 S (PR-2B)** (OD 19,1 mm)	Z8	574806 R	135,30
						VAU 25 S (PR-2B)** (OD 25,4 mm)	Z8	574808 R	135,30
FITTINGS ESTÁNDAR ECO-PRESS	RFz 16*		571325	201,00	FORZA STAINLESS V PRESS (AUS)	V 15		570115	159,90
	RFz 20*		571330	201,00		V 22		570135	159,90
	RFz 25		571335	201,00		V 28		570145	159,90
	RFz 32		571340	201,00		V 35		570155	159,90
FITTINGS ESTÁNDAR MULTICAPA	RFz 16*		571325	201,00		V 42		570165	373,00
	RFz 18*		571327	201,00		V 54		570175	383,00
	RFz 20*		571330	201,00		M 76.1 XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579101 R	1.213,00
	RFz 25		571335	201,00		M 88.9 G XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579110 R	1.416,00
	RFz 32		571340	201,00		M 108.0 G XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579111 R	1.416,00
FITTINGS ESTÁNDAR PE-X	RFz 16*		571325	201,00		V 15 S (PR-2B)	Z8	574752 R	131,20
	RFz 20*		571330	201,00		V 22 S (PR-2B)	Z8	574758 R	131,20
	RFz 25		571335	201,00		V 28 S (PR-2B)	Z8	574760 R	131,20
	RFz 32		571340	201,00		V 35 S (PR-2B)	Z8	574762 R	131,20
FORNARA ForPress	B 16*		570850	210,20	FRABO > Rubinetterie Bresciane Bonomi				
	B 20*		570860	210,20	Fränkische alpex-duo XS	F 16*		570717	183,80
	B 26		570870	232,50		F 20*		570727	183,80
	B 32		570880	232,50		F 26*		570730	199,00
	F 16*		570717	183,80		F 32		570735	199,00
	F 20*		570727	183,80		F 16 S (PR-2B)**	Z8	574728 R	150,80
	F 26*		570730	199,00		F 20 S (PR-2B)**	Z8	574730 R	150,80
	F 32		570735	199,00		F 26 S (PR-2B)**	Z8	574732 R	163,20
	F 16 S (PR-2B)**	Z8	574728 R	150,80		F 32 S (PR-2B)**	Z8	574734 R	163,20
	F 20 S (PR-2B)**	Z8	574730 R	150,80		TH 16*		570460	192,90
	F 26 S (PR-2B)**	Z8	574732 R	163,20		TH 20*		570470	192,90
	F 32 S (PR-2B)**	Z8	574734 R	163,20		TH 26*		570475	192,90
	H 16*		570320	173,60		TH 32		570480	192,90
	H 20*		570350	173,60		TH 16 S (PR-2B)**	Z8	574782 R	158,20
	H 26*		570370	173,60		TH 20 S (PR-2B)**	Z8	574788 R	158,20
	H 32		570380	173,60		TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 16*		570460	192,90		TH 32 S (PR-2B)**	Z8	574798 R	158,20
	TH 20*		570470	192,90	Fränkische alpex F50 PROFI	F 16*		570717	183,80
	TH 26*		570475	192,90		F 20*		570727	183,80
	TH 32		570480	192,90		F 26*		570730	199,00
	TH 16 S (PR-2B)**	Z8	574782 R	158,20		F 32		570735	199,00
	TH 20 S (PR-2B)**	Z8	574788 R	158,20		F 16 S (PR-2B)**	Z8	574728 R	150,80
	TH 26 S (PR-2B)**	Z8	574794 R	158,20		F 20 S (PR-2B)**	Z8	574730 R	150,80
	TH 32 S (PR-2B)	Z8	574798 R	158,20		F 26 S (PR-2B)**	Z8	574732 R	163,20
	U 16*		570765	180,70		F 32 S (PR-2B)**	Z8	574734 R	163,20
	U 20*		570775	180,70		H 16*		570320	173,60
	U 26* ⁽¹²⁾		570750	211,20		H 20*		570350	173,60
	U 32		570785	211,20	(DN 26)	H 26*		570370	173,60
	U 16 S (PR-2B)**	Z8	574860 R	148,20		H 32		570380	173,60
	U 20 S (PR-2B)**	Z8	574862 R	148,20		TH 16*		570460	192,90
	U 26 S (PR-2B)**	Z8	574866 R	173,20		TH 20*		570470	192,90
	U 32 S (PR-2B)	Z8	574868 R	173,20		TH 26*		570475	192,90
FORZA WATER CRIMP (AUS)	K16/P18*		572600	201,00		TH 32		570480	192,90
	K/20*		572605	201,00		TH 16 S (PR-2B)**	Z8	574782 R	158,20
	K/25*		572610	201,00		TH 20 S (PR-2B)**	Z8	574788 R	158,20
	K32		572615	201,00		TH 26 S (PR-2B)**	Z8	574794 R	158,20
	K1/40		572620	201,00		TH 32 S (PR-2B)**	Z8	574798 R	158,20
FORZA STAINLESS WATER CRIMP	K16/P18*		572600	201,00	VP 16*	U 16*		570765	180,70
	K/20*		572605	201,00		U 20*		570775	180,70
FORZA STESSO PEX WATER AND GAS CRIMP (AUS)	U 16*		570765	180,70		U 25*		570780	180,70
	U 20*		570775	180,70		U 32		570785	211,20
	U 25*		570780	180,70		VP 20*		570910	191,90
	U 32		570785	211,20		VP 32		570915	191,90
	U 40		570790	257,90				570925	212,20
	U 50		570795	310,00					
	U 63 (PZ-S)		572365	669,00					

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 227. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 227. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 230.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC, see page 238.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

¹³⁾ Only pressing tongs/S pressing rings (PR-2B) from designation "125" (1st quarter of 2025), "225" (2nd quarter of 2025) etc. can be used.
The designation is stamped on every pressing jaw.

The suitability of REMS pressing tools for pressfitting systems: Date 13.10.2025. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 288 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
Fränkische alpex L	Fz 40		570742	212,20
	Fz 50		570747	322,00
	F 63 (PZ-S)		572385	669,00
	Fz 75 (PR-3B)	Z4	572830 R	641,00
G				
gabotherm H+S	TH 10*		570467	192,90
	TH 12*		570452	192,90
	TH 14*		570455	192,90
	TH 15*		570457	192,90
	TH 16*		570460	192,90
	TH 17*		570462	192,90
	TH 18*		570465	192,90
	TH 20*		570470	192,90
	TH 25*		570495	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	TH 40		570485	255,80
	TH 50 (PZ-S)		572400	669,00
	TH 63 (PZ-S)		572405	669,00
	TH 10 S (PR-2B)**	Z8	574772 R	158,20
	TH 12 S (PR-2B)**	Z8	574776 R	158,20
	TH 14 S (PR-2B)**	Z8	574778 R	158,20
	TH 15 S (PR-2B)**	Z8	574780 R	158,20
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 17 S (PR-2B)**	Z8	574784 R	158,20
	TH 18 S (PR-2B)**	Z8	574786 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 25 S (PR-2B)**	Z8	574792 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 32 S (PR-2B)	Z8	574798 R	158,20
Gallagher USA	H 12* (¼")		570300	173,60
YogaPipe ACR	U 14* (¾")		570760	180,70
	U 16* (½")		570765	180,70
	U 18* (¾")		570770	180,70
	U 20* (¾")		570775	180,70
	U 25* (¾")		570780	180,70
	U 32 (1½")		570785	211,20
Geberit FlowFit	GFFb 16–40*		571480 R	349,00
	GFFo 50–75		571485 R	549,00
Geberit Mapress CuNiFe	M 15		570110	159,90
	M 22		570130	159,90
	M 28		570140	159,90
	M 35		570150	159,90
	M 35 (PR-3S)	Z2	572727 R	696,00
	M 42 (PR-3S)	Z2	572706 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
Geberit Mapress C-STAHl	M 12		570100	159,90
	M 15		570110	159,90
	M 18		570120	159,90
	M 22		570130	159,90
	M 28		570140	159,90
	M 35		570150	159,90
	M 35 (PR-3S)	Z2	572727 R	696,00
	M 42 (PZ-4G)		570160	515,00
	M 54 (PZ-4G)		570170	515,00
	M 42 (PR-3S)	Z2	572706 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00
	M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107 R	1.213,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
	M 12 S (PR-2B)	Z8	574736 R	131,20
	M 15 S (PR-2B)	Z8	574738 R	131,20
	M 18 S (PR-2B)	Z8	574740 R	131,20
Geberit Mapress Sprinkler nass	M 22 S (PR-2B)	Z8	574742 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20
	M 22		570130	159,90
	M 28		570140	159,90
	M 35 (PR-3S)	Z2	572727 R	696,00
	M 42 (PR-3S)	Z2	572706 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00
	M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107 R	1.213,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
Geberit Mapress Edelstahl	M 12		570100	159,90
	M 15		570110	159,90
	M 18		570120	159,90
	M 22		570130	159,90
	M 28		570140	159,90
	M 35		570150	159,90
	M 35 (PR-3S)	Z2	572727 R	696,00
	M 42 (PZ-4G)		570160	515,00
	M 54 (PZ-4G)		570170	515,00
	M 42 (PR-3S)	Z2	572706 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
	M 12 S (PR-2B)	Z8	574736 R	131,20
	M 15 S (PR-2B)	Z8	574738 R	131,20
	M 18 S (PR-2B)	Z8	574740 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20
Geberit Mapress Edelstahl Gas	M 15		570110	159,90
	M 18		570120	159,90
	M 22		570130	159,90
	M 28		570140	159,90
	M 35		570150	159,90
	M 35 (PR-3S)	Z2	572727 R	696,00
	M 42 (PR-3S)	Z2	572706 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00
	M 76,1 XL (PR-3S)	Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	M 88,9 G XL (PR-3S) ⁷⁾	Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
	M 108,0 G XL (PR-3S) ⁷⁾	Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
	M 15 S (PR-2B)	Z8	574738 R	131,20
Geberit Mapress Kupfer	M 18 S (PR-2B)	Z8	574740 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20
	M 22		570130	159,90
	M 28		570140	159,90
	M 35		570150	159,90
	M 35 (PR-3S)	Z2	572727 R	696,00
	M 42 (PZ-4G)		570160	515,00
	M 54 (PZ-4G)		570170	515,00
	M 42 (PR-3S)	Z2	572706 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00
Geberit Mapress Kupfer Gas	M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107 R	1.213,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
	M 12 S (PR-2B)	Z8	574736 R	131,20
	M 15 S (PR-2B)	Z8	574738 R	131,20
	M 18 S (PR-2B)	Z8	574740 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20
	M 15		570110	159,90
	M 18		570120	159,90
	M 22		570130	159,90
	M 28		570140	159,90
	M 35		570150	159,90
	M 35 (PR-3S)	Z2	572727 R	696,00
	M 42 (PZ-4G)		570160	515,00
	M 54 (PZ-4G)		570170	515,00
Geberit Mapress Therm	M 42 (PR-3S)	Z2	572706 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
	M 15 S (PR-2B)	Z8	574738 R	131,20
	M 18 S (PR-2B)	Z8	574740 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20
	M 15		570110	159,90
	M 18		570120	159,90

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
Geberit Mepla	G 16*		570400	192,90	General Fittings Serie 5500	B 16*		570850	210,20
	G 20*		570410	192,90		B 18*		570855	210,20
	G 26*		570420	205,10		B 20*		570860	210,20
	G 32		570430	218,30		B 26		570870	232,50
	G 40		570440	283,20		B 32		570880	232,50
	G 50		570450	296,40		F 16*		570717	183,80
	G 63 (PZ-S)		572470	842,00		F 20*		570727	183,80
Geberit Mepla Therm	G 16*		570400	192,90		F 26*		570730	199,00
	G 20*		570410	192,90		F 32		570735	199,00
	G 26*		570420	205,10		F 16 S (PR-2B)**	Z8	574728 R	150,80
Geberit Volex	TH 16*		570460	192,90		F 20 S (PR-2B)**	Z8	574730 R	150,80
	TH 20*		570470	192,90		F 26 S (PR-2B)**	Z8	574732 R	163,20
	TH 26*		570475	192,90		F 32 S (PR-2B)**	Z8	574734 R	163,20
General Fittings 5T00	H 16*		570320	173,60		H 16*		570320	173,60
	H 20*		570350	173,60		H 18*		570340	173,60
	H 25*		570360	173,60		H 20*		570350	173,60
	H 26*		570370	173,60		H 25*		570360	173,60
	H 32		570380	173,60		H 26*		570370	173,60
	H 40 (PZ-4G)		570390	586,00		H 32		570380	173,60
	TH 16*		570460	192,90		H 40 (PZ-4G)		570390	586,00
	TH 20*		570470	192,90		TH 16*		570460	192,90
	TH 25*		570495	192,90		TH 18*		570465	192,90
	TH 26*		570475	192,90		TH 20*		570470	192,90
	TH 32		570480	192,90		TH 25*		570495	192,90
	TH 40		570485	255,80		TH 26*		570475	192,90
	TH 50 (PZ-S)		572400	669,00		TH 32		570480	192,90
	TH 63 (PZ-S)		572405	669,00		TH 40		570485	255,80
	TH 16 S (PR-2B)**	Z8	574782 R	158,20		TH 50 (PZ-S)		572400	669,00
	TH 20 S (PR-2B)**	Z8	574788 R	158,20		TH 63 (PZ-S)		572405	669,00
	TH 25 S (PR-2B)**	Z8	574792 R	158,20		TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20		TH 18 S (PR-2B)**	Z8	574786 R	158,20
	TH 32 S (PR-2B)**	Z8	574798 R	158,20		TH 20 S (PR-2B)**	Z8	574788 R	158,20
	U 16*		570765	180,70		TH 25 S (PR-2B)**	Z8	574792 R	158,20
	U 20*		570775	180,70		TH 26 S (PR-2B)**	Z8	574794 R	158,20
	U 25*		570780	180,70		TH 32 S (PR-2B)**	Z8	574798 R	158,20
	U 32		570785	211,20		U 16*		570765	180,70
	U 40		570790	257,90		U 18*		570770	180,70
	U 63 (PZ-S)		572365	669,00		U 20*		570775	180,70
	U 63 (PR-3B)	Z4	572837 R	772,00		U 25*		570780	180,70
	U 16 S (PR-2B)**	Z8	574860 R	148,20		U 32		570785	211,20
	U 20 S (PR-2B)**	Z8	574862 R	148,20		U 40		570790	257,90
	U 25 S (PR-2B)**	Z8	574864 R	148,20		U 63 (PZ-S)		572365	669,00
	U 32 S (PR-2B)	Z8	574868 R	173,20		U 63 (PR-3B)	Z4	572837 R	772,00
General Fittings Ewoprex	H 16*		570320	173,60		U 16 S (PR-2B)**	Z8	574860 R	148,20
	H 20*		570350	173,60		U 18 S (PR-2B)**	Z8	574870 R	148,20
	H 26*		570370	173,60		U 20 S (PR-2B)**	Z8	574862 R	148,20
	H 32		570380	173,60		U 25 S (PR-2B)**	Z8	574864 R	148,20
	TH 16*		570460	192,90		U 32 S (PR-2B)	Z8	574868 R	173,20
	TH 20*		570470	192,90	General Fittings Trident	H 16*		570320	173,60
	TH 26*		570475	192,90		H 20*		570350	173,60
	TH 32		570480	192,90		H 26*		570370	173,60
	TH 40		570485	255,80		H 32		570380	173,60
	TH 50 (PZ-S)		572400	669,00		TH 16*		570460	192,90
	TH 63 (PZ-S)		572405	669,00		TH 20*		570470	192,90
	TH 16 S (PR-2B)**	Z8	574782 R	158,20		TH 26*		570475	192,90
	TH 20 S (PR-2B)**	Z8	574788 R	158,20		TH 32		570480	192,90
	TH 26 S (PR-2B)**	Z8	574794 R	158,20		TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 32 S (PR-2B)**	Z8	574798 R	158,20		TH 20 S (PR-2B)**	Z8	574788 R	158,20
	U 16*		570765	180,70		TH 26 S (PR-2B)**	Z8	574794 R	158,20
	U 20*		570775	180,70		TH 32 S (PR-2B)**	Z8	574798 R	158,20
	U 32		570785	211,20		U 16*		570765	180,70
	U 40		570790	257,90		U 20*		570775	180,70
	U 63 (PZ-S)		572365	669,00		U 32		570785	211,20
	U 63 (PR-3B)	Z4	572837 R	772,00		U 16 S (PR-2B)**	Z8	574860 R	148,20
	U 16 S (PR-2B)**	Z8	574860 R	148,20		U 20 S (PR-2B)**	Z8	574862 R	148,20
	U 20 S (PR-2B)**	Z8	574862 R	148,20		U 32 S (PR-2B)	Z8	574868 R	173,20
	U 32 S (PR-2B)	Z8	574868 R	173,20					

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 227. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 227. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 230.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC, see page 238.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

¹³⁾ Only pressing tongs/S pressing rings (PR-2B) from designation "125" (1st quarter of 2025), "225" (2nd quarter of 2025) etc. can be used.

The designation is stamped on every pressing jaw.

The suitability of REMS pressing tools for pressfitting systems: Date 13.10.2025. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 288 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
General Fittings Trident Gas	TH 16*		570460	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 32 S (PR-2B)	Z8	574798 R	158,20
	H 16*		570320	173,60
	H 20*		570350	173,60
	H 26*		570370	173,60
	U 16*		570765	180,70
	U 20*		570775	180,70
	U 32		570785	211,20
	U 16 S (PR-2B)**	Z8	574860 R	148,20
	U 20 S (PR-2B)**	Z8	574862 R	148,20
	U 32 S (PR-2B)	Z8	574868 R	173,20
Giacomini Raccordi RM Giacomini	H 16*		570320	173,60
	H 20*		570350	173,60
	H 26*		570370	173,60
	H 32		570380	173,60
	TH 16*		570460	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	TH 40		570485	255,80
	TH 50 (PZ-S)		572400	669,00
	TH 63 (PZ-S)		572405	669,00
	U 16*		570765	180,70
	U 20*		570775	180,70
	U 32		570785	211,20
	U 40		570790	257,90
	U 50		570795	310,00
Giacomini RM MULTIGAS	H 16*		570320	173,60
	H 20*		570350	173,60
	H 26*		570370	173,60
	H 32		570380	173,60
	TH 16*		570460	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	U 16*		570765	180,70
	U 20*		570775	180,70
	U 32		570785	211,20
Giacomini Valvole Giacomini serie R850V	V 15		570115	159,90
	V 18		570125	159,90
	V 22		570135	159,90
	V 28		570145	159,90
	V 35		570155	159,90
	V 42		570165	373,00
	V 54		570175	383,00
	V 42 (PR-2B)	Z2	572850 R	334,00
	V 54 (PR-2B)	Z2	572851 R	361,00
	SA 15		570935	192,00
	SA 18		570940	192,00
	SA 22		570945	192,00
	SA 28		570950	192,00
	SA 35		570955	192,00
	M 15		570110	159,90
	M 18		570120	159,90
	M 22		570130	159,90
	M 28		570140	159,90
	M 35		570150	159,90
Golan Pipe Systems (Scandinavia) Alu-Pres	U 16*		570765	180,70
	U 20*		570775	180,70
	U 25*		570780	180,70
	U 32		570785	211,20
	U 40		570790	257,90
	U 50		570795	310,00
	U 63 (PZ-S)		572365	669,00
	U 63 (PR-3B)	Z4	572837 R	772,00
	U 75 (PR-3B)	Z4	572828 R	680,00
Grinnell G-PRESS Copper Fittings	VUS ½" (OD 15,9 mm)		571770	192,90
	VUS ¾" (OD 22,2 mm)		571775	192,90
	VUS 1" (OD 28,6 mm)		571780	192,90
	VUS 1¼" (OD 34,9 mm)		571785	192,90
	VUS 1½" (OD 41,3 mm)		571790	373,00
	VUS 2" (OD 54,0 mm)		571795	383,00
	VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z5	572819 R	641,00
	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820 R	641,00
GS Wärmesysteme System TH	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821 R	680,00
	TH 14*		570455	192,90
	TH 16*		570460	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	TH 40		570485	255,80
	TH 50 (PZ-S)		572400	669,00
	TH 63 (PZ-S)		572405	669,00
	TH 14 S (PR-2B)**	Z8	574778 R	158,20
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 32 S (PR-2B)	Z8	574798 R	158,20
GS Wärmesysteme System V	V 15		570115	159,90
	V 18		570125	159,90
	V 22		570135	159,90
	V 28		570145	159,90
	V 35		570155	159,90
	V 15 S (PR-2B)	Z8	574752 R	131,20
	V 18 S (PR-2B)	Z8	574756 R	131,20
	V 22 S (PR-2B)	Z8	574758 R	131,20
	V 28 S (PR-2B)	Z8	574760 R	131,20
	V 35 S (PR-2B)	Z8	574762 R	131,20

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
H				
HASTINIK Hastinik/Hitpress	M 15		570110	159,90
	M 18		570120	159,90
	M 22		570130	159,90
	M 28		570140	159,90
	M 35		570150	159,90
	M 42 (PZ-4G)		570160	515,00
	M 54 (PZ-4G)		570170	515,00
	M 42 (PR-3S)	Z2	572706 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
	M 15 S (PR-2B)	Z8	574738 R	131,20
	M 18 S (PR-2B)	Z8	574740 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20
heima24	M 28 S (PR-2B)	Z8	574744 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20
	TH 16*		570460	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	TH 40		570485	255,80
	TH 50 (PZ-S)		572400	669,00
	TH 63 (PZ-S)		572405	669,00
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 32 S (PR-2B)	Z8	574798 R	158,20
	U 16*		570765	180,70
	U 20*		570775	180,70
HELIROMA Klimapress	U 32		570785	211,20
	U 16*		570765	180,70
	U 20*		570775	180,70
	U 25*		570780	180,70
	U 32		570785	211,20
	U 40		570790	257,90
	U 50		570795	310,00
	U 63 (PR-3B)	Z4	572837 R	772,00
	U 63 (PZ-S)		572365	669,00
	U 75 (PR-3B)	Z4	572828 R	680,00
	U 16 S (PR-2B)**	Z8	574860 R	148,20
	U 20 S (PR-2B)**	Z8	574862 R	148,20
	U 25 S (PR-2B)**	Z8	574864 R	148,20
	U 32 S (PR-2B)**	Z8	574868 R	173,20
HELIROMA Klimapress PPSU LP	Rfz 16*		571325	201,00
	Rfz 20*		571330	201,00
	Rfz 25		571335	201,00
	Rfz 32		571340	201,00
	U 16*		570765	180,70
	U 20*		570775	180,70
	U 25*		570780	180,70
	U 26 ⁽²⁾		570750	211,20
	U 32		570785	211,20
	U 16 S (PR-2B)**	Z8	574860 R	148,20
	U 20 S (PR-2B)**	Z8	574862 R	148,20
	U 25 S (PR-2B)**	Z8	574864 R	148,20
	U 26 S (PR-2B)**	Z8	574866 R	173,20
	U 32 S (PR-2B)**	Z8	574868 R	173,20
Henco	TH 14*		570455	192,90
	TH 16*		570460	192,90
	TH 18*		570465	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
	HE 32		571900	230,50
	HEz 40		571904	334,00
	TH 14 S (PR-2B)**	Z8	574778 R	158,20
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 18 S (PR-2B)**	Z8	574786 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
Herotec tempusPRESS PLUS	H 16*		570320	173,60
	H 20*		570350	173,60
	H 25*		570360	173,60
	H 32		570380	173,60
	H 40 (PZ-4G)		570390	586,00
	Rfz 16*		571325	201,00
	Rfz 20*		571330	201,00
	Rfz 25		571335	201,00
	Rfz 32		571340	201,00
	TH 16*		570460	192,90
	TH 20*		570470	192,90
	TH 25*		570495	192,90
	TH 32		570480	192,90
	TH 40		570485	255,80
	TH 50 (PZ-S)		572400	669,00
	TH 63 (PZ-S)		572405	669,00
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 25 S (PR-2B)**	Z8	574792 R	158,20
	TH 32 S (PR-2B)	Z8	574798 R	158,20
	U 16*		570765	180,70
	U 20*		570775	180,70
	U 25*		570780	180,70
	U 32		570785	211,20
	U 40		570790	257,90
	U 50		570795	310,00
	U 63 (PZ-S)		572365	669,00
	U 63 (PR-3B)	Z4	572837 R	772,00
	U 75 (PR-3B)	Z4	572828 R	680,00

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
Herotec tempusPRESS PLUS PPSU	H 16*		570320	173,60	HITEC Sistema Multistrato	TH 14*		570455	192,90
	H 20*		570350	173,60		TH 16*		570460	192,90
	H 25*		570360	173,60		TH 18*		570465	192,90
	H 32		570380	173,60		TH 20*		570470	192,90
	TH 16*		570460	192,90		TH 26*		570475	192,90
	TH 20*		570470	192,90		TH 32		570480	192,90
	TH 25*		570495	192,90		TH 40		570485	255,80
	TH 32		570480	192,90		TH 50 (PZ-S)		572400	669,00
	TH 40		570485	255,80		TH 14 S (PR-2B)**	Z8	574778 R	158,20
	TH 50 (PZ-S)		572400	669,00		TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 63 (PZ-S)		572405	669,00		TH 18 S (PR-2B)**	Z8	574786 R	158,20
	TH 16 S (PR-2B)**	Z8	574782 R	158,20		TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20		TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 25 S (PR-2B)**	Z8	574792 R	158,20		TH 32 S (PR-2B)**	Z8	574798 R	158,20
	TH 32 S (PR-2B)	Z8	574798 R	158,20	HITHERM-ISOTUBI NUMEPRESS	M 15		570110	159,90
	U 16*		570765	180,70		M 18		570120	159,90
	U 20*		570775	180,70		M 22		570130	159,90
	U 25*		570780	180,70		M 28		570140	159,90
	U 32		570785	211,20		M 35		570150	159,90
	U 40		570790	257,90		M 42 (PR-3S)	Z2	572706 R	696,00
	U 50		570795	310,00		M 54 (PR-3S)	Z2	572708 R	696,00
	U 63 (PZ-S)		572365	669,00		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	U 63 (PR-3B)	Z4	572837 R	772,00		M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
	U 75 (PR-3B)	Z4	572828 R	680,00		M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
HERZ PIPEFIX	TH 10*		570467	192,90		M 15 S (PR-2B)	Z8	574738 R	131,20
	TH 16*		570460	192,90		M 18 S (PR-2B)	Z8	574740 R	131,20
	TH 20*		570470	192,90		M 22 S (PR-2B)	Z8	574742 R	131,20
	TH 26*		570475	192,90		M 28 S (PR-2B)	Z8	574744 R	131,20
	TH 32		570480	192,90		M 35 S (PR-2B)	Z8	574746 R	131,20
	TH 40		570485	255,80	HITHERM HTpress	M 15		570110	159,90
	TH 50 (PZ-S)		572400	669,00		M 18		570120	159,90
	TH 63 (PZ-S)		572405	669,00		M 22		570130	159,90
	THz 75 (PR-3B)	Z4	572829 R	641,00		M 28		570140	159,90
	TH 10 S (PR-2B)**	Z8	574772 R	158,20		M 35		570150	159,90
	TH 16 S (PR-2B)**	Z8	574782 R	158,20		M 42 (PR-3S)	Z2	572706 R	696,00
	TH 20 S (PR-2B)**	Z8	574788 R	158,20		M 54 (PR-3S)	Z2	572708 R	696,00
	TH 26 S (PR-2B)**	Z8	574794 R	158,20		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	TH 32 S (PR-2B)**	Z8	574798 R	158,20		M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
						M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
HIDRONIX MULTIGAS	TH 16*		570460	192,90		M 15 S (PR-2B)	Z8	574738 R	131,20
	TH 20*		570470	192,90		M 18 S (PR-2B)	Z8	574740 R	131,20
	TH 26*		570475	192,90		M 22 S (PR-2B)	Z8	574742 R	131,20
						M 28 S (PR-2B)	Z8	574744 R	131,20
HIDRONIX MULTIPIPE	TH 14*		570455	192,90		M 35 S (PR-2B)	Z8	574746 R	131,20
	TH 16*		570460	192,90	HITHERM HTfire	M 15		570110	159,90
	TH 20*		570470	192,90		M 18		570120	159,90
	TH 26*		570475	192,90		M 22		570130	159,90
	TH 32		570480	192,90		M 28		570140	159,90
	H 14*		570310	173,60		M 35		570150	159,90
	H 16*		570320	173,60		M 42 (PR-3S)	Z2	572706 R	696,00
	H 18*		570340	173,60		M 54 (PR-3S)	Z2	572708 R	696,00
	H 20*		570350	173,60		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	H 26*		570370	173,60		M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
	H 32		570380	173,60		M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
	U 14*		570760	180,70		M 15 S (PR-2B)	Z8	574738 R	131,20
	U 16*		570765	180,70		M 18 S (PR-2B)	Z8	574740 R	131,20
	U 18*		570770	180,70		M 22 S (PR-2B)	Z8	574742 R	131,20
	U 20*		570775	180,70		M 28 S (PR-2B)	Z8	574744 R	131,20
	U 26* ¹²⁾		570750	211,20		M 35 S (PR-2B)	Z8	574746 R	131,20
	U 32		570785	211,20	HITHERM HTair	M 15		570110	159,90
						M 18		570120	159,90
						M 22		570130	159,90
						M 28		570140	159,90
						M 35		570150	159,90
						M 42 (PR-3S)	Z2	572706 R	696,00
						M 54 (PR-3S)	Z2	572708 R	696,00
						M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
						M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
						M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
HIDRONIX UNICO	TH 14*		570455	192,90		M 15 S (PR-2B)	Z8	574738 R	131,20
	TH 16*		570460	192,90		M 18 S (PR-2B)	Z8	574740 R	131,20
	TH 20*		570470	192,90		M 22 S (PR-2B)	Z8	574742 R	131,20
	TH 26*		570475	192,90		M 28 S (PR-2B)	Z8	574744 R	131,20
	TH 32		570480	192,90		M 35 S (PR-2B)	Z8	574746 R	131,20
	H 14*		570310	173,60		M 15		570110	159,90
	H 16*		570320	173,60		M 18		570120	159,90
	H 18*		570340	173,60		M 22		570130	159,90
	H 20*		570350	173,60		M 28		570140	159,90
	H 26*		570370	173,60		M 35		570150	159,90
	H 32		570380	173,60		M 42 (PR-3S)	Z2	572706 R	696,00
	U 14*		570760	180,70		M 54 (PR-3S)	Z2	572708 R	696,00
	U 16*		570765	180,70		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	U 18*		570770	180,70		M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
	U 20*		570775	180,70		M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
	U 26* ¹²⁾		570750	211,20		M 15 S (PR-2B)	Z8	574738 R	131,20
	U 32		570785	211,20		M 18 S (PR-2B)	Z8	574740 R	131,20
						M 22 S (PR-2B)	Z8	574742 R	131,20
						M 28 S (PR-2B)	Z8	574744 R	131,20
						M 35 S (PR-2B)	Z8	574746 R	131,20

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 227. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 227. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 230.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 238.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

¹³⁾ Only pressing tongs/S pressing rings (PR-2B) from designation "125" (1st quarter of 2025), "225" (2nd quarter of 2025) etc. can be used. The designation is stamped on every pressing jaw.

The suitability of REMS pressing tools for pressfitting systems: Date 13.10.2025. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 288 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
Hopewell press fit system	M 15		570110	159,90
	M 18		570120	159,90
	M 22		570130	159,90
	M 28		570140	159,90
	M 35		570150	159,90
	M 42 (PZ-4G)		570160	515,00
	M 54 (PZ-4G)		570170	515,00
	M 42 (PR-3S)	Z2	572706 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00
hp praski BAVARIA-press	TH 10*		570467	192,90
	TH 12*		570452	192,90
	TH 14*		570455	192,90
	TH 16*		570460	192,90
	TH 17*		570462	192,90
	TH 20*		570470	192,90
	TH 25*		570495	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	TH 40		570485	255,80
	TH 10 S (PR-2B)**	Z8	574772 R	158,20
	TH 12 S (PR-2B)**	Z8	574776 R	158,20
	TH 14 S (PR-2B)**	Z8	574778 R	158,20
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 17 S (PR-2B)**	Z8	574784 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 25 S (PR-2B)**	Z8	574792 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 32 S (PR-2B)	Z8	574798 R	158,20
ICOOL PACIFIC COOL PRESS	BMP ¼"		571700 R	190,90
	BMP ¾"		571702 R	190,90
	BMP ½"		571704 R	190,90
	BMP ¾"		571706 R	190,90
	BMP ¾"		571708 R	190,90
	BMP 1 ⅝"		571714 R	190,90
	BMP ¼" S (PR-2B)	Z8	574810 R	156,60
	BMP ¾" S (PR-2B)	Z8	574812 R	156,60
	BMP ½" S (PR-2B)	Z8	574814 R	156,60
	BMP ¾" S (PR-2B)	Z8	574816 R	156,60
	BMP ¾" S (PR-2B)	Z8	574818 R	156,60
	BMP 1 ⅝" S (PR-2B)	Z8	574824 R	156,60
Idrosanitaria Bonomi Homegas	TH 16*		570460	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
Idrosanitaria Bonomi Idropress	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 16*		570460	192,90
	TH 18*		570465	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	TH 40		570485	255,80
	TH 50 (PZ-S)		572400	669,00
	TH 63 (PZ-S)		572405	669,00
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 18 S (PR-2B)**	Z8	574786 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
IDROSISTEMI Ta-Press	TH 32 S (PR-2B)	Z8	574798 R	158,20
	TH 16*		570460	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	TH 40		570485	255,80
	TH 50 (PZ-S)		572400	669,00
	TH 63 (PZ-S)		572405	669,00
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 32 S (PR-2B)	Z8	574798 R	158,20
	F 16*		570717	183,80
	F 20*		570727	183,80
	F 26*		570730	199,00
	F 32		570735	199,00
	Fz 40		570742	212,20
	Fz 50		570747	322,00
	F 63 (PZ-S)		572385	669,00
	F 16 S (PR-2B)**	Z8	574728 R	150,80
	F 20 S (PR-2B)**	Z8	574730 R	150,80
	F 26 S (PR-2B)**	Z8	574732 R	163,20
	F 32 S (PR-2B)	Z8	574734 R	163,20
	H 16*		570320	173,60
	H 20*		570350	173,60
	H 26*		570370	173,60
	H 32		570380	173,60
	H 40 (PZ-4G)		570390	586,00
	U 16*		570765	180,70
	U 20*		570775	180,70
	U 26* ⁽¹²⁾		570750	211,20
	U 32		570785	211,20
	U 40		570790	257,90
	U 50		570795	310,00
	U 63 (PZ-S)		572365	669,00
	U 16 S (PR-2B)**	Z8	574860 R	148,20
	U 20 S (PR-2B)**	Z8	574862 R	148,20
	U 26 S (PR-2B)**	Z8	574866 R	173,20
	U 32 S (PR-2B)	Z8	574868 R	173,20
	B 16*		570850	210,20
	B 20*		570860	210,20
	B 26		570870	232,50
	B 32		570880	232,50

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
IDROTRADE Storm Multipinza	H 16*		570320	173,60
	H 20*		570350	173,60
	H 26*		570370	173,60
	H 32		570380	173,60
	TH 16*		570460	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	THL 32		570487	192,90
	TH 40		570485	255,80
	TH 50 (PZ-S)		572400	669,00
	TH 63 (PZ-S)		572405	669,00
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 32 S (PR-2B)	Z8	574798 R	158,20
	U 16*		570765	180,70
	U 20*		570775	180,70
	U 16 S (PR-2B)**	Z8	574860 R	148,20
IDROTRADE StormPRES ⁽¹⁾	U 20 S (PR-2B)**	Z8	574862 R	148,20
	M 15		570110	159,90
	M 18		570120	159,90
	M 22		570130	159,90
	M 28		570140	159,90
	M 35		570150	159,90
	M 42 (PR-3S)	Z2	572706 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00
	M 76,1 XL (PR-3S) ⁽⁸⁾	Z7 XL 45 kN ⁽⁴⁾	579101 R	1.213,00
	M 88,9 G XL (PR-3S) ⁽⁸⁾	Z7 XL 45 kN ⁽⁴⁾	579110 R	1.416,00
	M 108,0 G XL (PR-3S) ⁽⁸⁾	Z7 XL 45 kN ⁽⁴⁾	579111 R	1.416,00
	M 15 S (PR-2B)	Z8	574738 R	131,20
	M 18 S (PR-2B)	Z8	574740 R	131,20
IDROTRADE StormSTEEL ⁽¹⁾	M 22 S (PR-2B)	Z8	574742 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20
	M 12		570100	159,90
	M 15		570110	159,90
	M 18		570120	159,90
	M 22		570130	159,90
	M 28		570140	159,90
	M 35		570150	159,90
	M 42 (PR-3S)	Z2	572706 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00
	M 76,1 XL (PR-3S) ⁽⁸⁾	Z7 XL 45 kN ⁽⁴⁾	579101 R	1.213,00
	M 88,9 G XL (PR-3S) ⁽⁸⁾	Z7 XL 45 kN ⁽⁴⁾	579110 R	1.416,00
Instantor Press System	M 108,0 G XL (PR-3S) ⁽⁸⁾	Z7 XL 45 kN ⁽⁴⁾	579111 R	1.416,00
	M 12 S (PR-2B)	Z8	574736 R	131,20
	M 15 S (PR-2B)	Z8	574738 R	131,20
	M 18 S (PR-2B)	Z8	574740 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20
	TH 16*		570460	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	TH 40		570485	255,80
	TH 50 (PZ-S)		572400	669,00
Instantor Copper Press Imperial	TH 63 (PZ-S)		572405	669,00
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 32 S (PR-2B)	Z8	574798 R	158,20
	VI ½" S (PR-2B)	Z8	574850 R	156,60
	VI ¾" S (PR-2B)	Z8	574852 R	156,60
	VI 1" S (PR-2B)	Z8	574854 R	156,60
Instantor Copper Press Metric	M 15		570110	159,90
	M 22		570130	159,90
	M 28		570140	159,90
	M 15 S (PR-2B)	Z8	574738 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20
INVENA Prov	TH 16*		570460	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 32 S (PR-2B)	Z8	574798 R	158,20
	U 16*		570765	180,70
	U 20*		570775	180,70
	U 16 S (PR-2B)**	Z8	574860 R	148,20
	U 20 S (PR-2B)**	Z8	574862 R	148,20
	B 16*		570850	210,20
	B 20*		570860	210,20
INVENA Prov LBP	TH 16*		570460	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 32 S (PR-2B)	Z8	574798 R	158,20
	U 16*		570765	180,70
	U 20*		570775	180,70
	U 26* ⁽¹²⁾		570750	211,20
	U 32		570785	211,20
	U 16 S (PR-2B)**	Z8	574860 R	148,20
	U 20 S (PR-2B)**	Z8	574862 R	148,20
	U 26 S (PR-2B)**	Z8	574866 R	173,20
	U 32 S (PR-2B)	Z8	574868 R	173,20

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
IPA IPANA Press	TH 10*		570467	192,90	ISOLTUBEX Multicap	RFz 16*		571325	201,00
	TH 11,6*		570482	192,90		RFz 18*		571327	201,00
	TH 12*		570452	192,90		RFz 20*		571330	201,00
	TH 14*		570455	192,90		RFIz 25		571337	222,00
	TH 15*		570457	192,90		RFIz 32		571342	222,00
	TH 16*		570460	192,90		U 16*		570765	180,70
	TH 17*		570462	192,90		U 18*		570770	180,70
	TH 18*		570465	192,90		U 20*		570775	180,70
	TH 20*		570470	192,90		U 25*		570780	180,70
	TH 22*		570472	192,90		U 32		570785	211,20
	TH 25*		570495	192,90		U 40		570790	257,90
	TH 26*		570475	192,90		U 50		570795	310,00
	TH 28		570477	192,90		U 63 (PR-3B)	Z4	572837 R	772,00
	TH 32		570480	192,90		U 63 (PZ-S)		572365	669,00
	TH 40		570485	255,80		U 16 S (PR-2B)**	Z8	574860 R	148,20
	TH 50 (PZ-S)		572400	669,00		U 18 S (PR-2B)**	Z8	574870 R	148,20
	TH 63 (PZ-S)		572405	669,00		U 20 S (PR-2B)**	Z8	574862 R	148,20
	THz 75 (PR-3B)	Z4	572829 R	641,00		U 25 S (PR-2B)**	Z8	574864 R	148,20
	TH 10 S (PR-2B)**	Z8	574772 R	158,20		U 32 S (PR-2B)	Z8	574868 R	173,20
	TH 11,6 S (PR-2B)**	Z8	574774 R	158,20	ISOLTUBEX Multicap GAS	RFz 16*		571325	201,00
	TH 12 S (PR-2B)**	Z8	574776 R	158,20		RFz 20*		571330	201,00
	TH 14 S (PR-2B)**	Z8	574778 R	158,20		RFIz 25		571337	222,00
	TH 15 S (PR-2B)**	Z8	574780 R	158,20	ISOLTUBEX Multicap-PPSU	RFIz 32		571342	222,00
	TH 16 S (PR-2B)**	Z8	574782 R	158,20		U 16*		570765	180,70
	TH 17 S (PR-2B)**	Z8	574784 R	158,20		U 20*		570775	180,70
	TH 18 S (PR-2B)**	Z8	574786 R	158,20		U 25*		570780	180,70
	TH 20 S (PR-2B)**	Z8	574788 R	158,20		U 32		570785	211,20
	TH 22 S (PR-2B)**	Z8	574790 R	158,20		U 16 S (PR-2B)**	Z8	574860 R	148,20
	TH 25 S (PR-2B)**	Z8	574792 R	158,20		U 20 S (PR-2B)**	Z8	574862 R	148,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20		U 25 S (PR-2B)**	Z8	574864 R	148,20
	TH 28 S (PR-2B)**	Z8	574796 R	158,20		U 32 S (PR-2B)	Z8	574868 R	173,20
	TH 32 S (PR-2B)**	Z8	574798 R	158,20	ISOTUBI NUMEPRESS	M 15		570110	159,90
IPA THu IPANA Press	TH 16*		570460	192,90		M 18 ¹⁾		570120	159,90
	TH 20*		570470	192,90		M 22		570130	159,90
	TH 26*		570475	192,90		M 28 ¹⁾		570140	159,90
	TH 32		570480	192,90		M 35		570150	159,90
	TH 40		570485	255,80		M 42 (PR-3S)	Z2	572706 R	696,00
	TH 16 S (PR-2B)**	Z8	574782 R	158,20		M 54 (PR-3S)	Z2	572708 R	696,00
	TH 20 S (PR-2B)**	Z8	574788 R	158,20		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	TH 26 S (PR-2B)**	Z8	574794 R	158,20		M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
	TH 32 S (PR-2B)	Z8	574798 R	158,20		M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
IPALPEX (Industrie du Plastique et Accessoires)	TH 14*		570455	192,90		M 15 S (PR-2B)	Z8	574738 R	131,20
	TH 16*		570460	192,90		M 18 S (PR-2B)	Z8	574740 R	131,20
	TH 18*		570465	192,90		M 22 S (PR-2B)	Z8	574742 R	131,20
	TH 20*		570470	192,90		M 28 S (PR-2B)	Z8	574744 R	131,20
	TH 26*		570475	192,90		M 35 S (PR-2B)	Z8	574746 R	131,20
	THL 32		570487	192,90	IVAR ALPEX-GAS	B 20		570860	210,20
	TH 40		570485	255,80		B 26		570870	232,50
	TH 50 (PZ-S)		572400	669,00		B 32		570880	232,50
IPLEX PIPELINES AUSTRALIA Iplex Pro-fit	TH 63 (PZ-S)		572405	669,00	IVAR Ivar-Press	B 14*		570845	210,20
	K16/P18*		572600	201,00		B 16*		570850	210,20
IPLEX PIPELINES AUSTRALIA Iplex K1 (Gas)	PF 22*		571980	213,60		B 18*		570855	210,20
	K16/P18*		572600	201,00		B 20*		570860	210,20
	K/20*		572605	201,00		B 26		570870	232,50
	K/25*		572610	201,00		B 32		570880	232,50
	K32		572615	201,00		Fz 40		570742	212,20
	K1/40		572620	201,00		Fz 50		570747	322,00
IPLEX PIPELINES AUSTRALIA Iplex K2	K1/50		572625	330,00		F 63 (PZ-S)		572385	669,00
	K16/P18*		572600	201,00	IVAR MULTI PRESS GAS ITALIA	TH 16*		570460	192,90
	K/20*		572605	201,00		TH 20*		570470	192,90
ISOLTUBEX ISOLPEX IPERT	K/25*		572610	201,00		TH 26*		570475	192,90
	RFz 16*		571325	201,00		H 16*		570320	173,60
	RFz 20*		571330	201,00		H 20*		570350	173,60
	RFIz 25		571337	222,00		H 26*		570370	173,60
	RFIz 32		571342	222,00		U 16*		570765	180,70
						U 20*		570775	180,70

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 227. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 227. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 230.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 238.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

¹³⁾ Only pressing tongs/S pressing rings (PR-2B) from designation "125" (1st quarter of 2025), "225" (2nd quarter of 2025) etc. can be used.

The designation is stamped on every pressing jaw.

The suitability of REMS pressing tools for pressfitting systems: Date 13.10.2025. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 288 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
IVAR Multi Press MP	TH 16*		570460	192,90
	TH 18*		570465	192,90
	TH 20*		570470	192,90
	TH 25*		570495	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	TH 40		570485	255,80
	TH 50 (PZ-S)		572400	669,00
	TH 63 (PZ-S)		572405	669,00
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 18 S (PR-2B)**	Z8	574786 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 25 S (PR-2B)**	Z8	574792 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 32 S (PR-2B)	Z8	574798 R	158,20
	F 16*		570717	183,80
	F 18*		570720	183,80
	F 20*		570727	183,80
	F 26*		570730	199,00
	F 32		570735	199,00
	Fz 40		570742	212,20
	Fz 50		570747	322,00
	F 63 (PZ-S)		572385	669,00
	F 16 S (PR-2B)**	Z8	574728 R	150,80
	F 20 S (PR-2B)**	Z8	574730 R	150,80
	F 26 S (PR-2B)**	Z8	574732 R	163,20
	F 32 S (PR-2B)	Z8	574734 R	163,20
	H 16*		570320	173,60
	H 18*		570340	173,60
	H 20*		570350	173,60
	H 25*		570360	173,60
	H 26*		570370	173,60
	H 32		570380	173,60
	H 40 (PZ-4G)		570390	586,00
	U 16*		570765	180,70
	U 18*		570770	180,70
	U 20*		570775	180,70
	U 25*		570780	180,70
	U 26* ¹²⁾		570750	211,20
	U 32		570785	211,20
	U 40		570790	257,90
	U 50		570795	310,00
	U 63 (PZ-S)		572365	669,00
	U 16 S (PR-2B)**	Z8	574860 R	148,20
	U 18 S (PR-2B)**	Z8	574870 R	148,20
	U 20 S (PR-2B)**	Z8	574862 R	148,20
	U 25 S (PR-2B)**	Z8	574864 R	148,20
	U 26 S (PR-2B)**	Z8	574866 R	173,20
	U 32 S (PR-2B)	Z8	574868 R	173,20
	B 16*		570850	210,20
	B 18*		570855	210,20
	B 20*		570860	210,20
	B 26		570870	232,50
	B 32		570880	232,50
IVAR Multi Press Leak (MPL)	TH 16*		570460	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 32 S (PR-2B)	Z8	574798 R	158,20
	F 16*		570717	183,80
	F 20*		570727	183,80
	F 26*		570730	199,00
	F 32		570735	199,00
	F 16 S (PR-2B)**	Z8	574728 R	150,80
	F 20 S (PR-2B)**	Z8	574730 R	150,80
	F 26 S (PR-2B)**	Z8	574732 R	163,20
	F 32 S (PR-2B)	Z8	574734 R	163,20
	H 16*		570320	173,60
	H 20*		570350	173,60
	H 26*		570370	173,60
	H 32		570380	173,60
	U 16*		570765	180,70
	U 20*		570775	180,70
	U 26* ¹²⁾		570750	211,20
	U 32		570785	211,20
	U 16 S (PR-2B)**	Z8	574860 R	148,20
	U 20 S (PR-2B)**	Z8	574862 R	148,20
	U 26 S (PR-2B)**	Z8	574866 R	173,20
	U 32 S (PR-2B)	Z8	574868 R	173,20
	B 16*		570850	210,20
	B 20*		570860	210,20
	B 26		570870	232,50
	B 32		570880	232,50

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
IVAR Plastic Multi Press Leak (PMPL)	TH 16*		570460	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 32 S (PR-2B)	Z8	574798 R	158,20
	F 16*		570717	183,80
	F 20*		570727	183,80
	F 26*		570730	199,00
	F 32		570735	199,00
	F 16 S (PR-2B)**	Z8	574728 R	150,80
	F 20 S (PR-2B)**	Z8	574730 R	150,80
	F 26 S (PR-2B)**	Z8	574732 R	163,20
	F 32 S (PR-2B)	Z8	574734 R	163,20
	H 16*		570320	173,60
	H 20*		570350	173,60
	H 26*		570370	173,60
	H 32		570380	173,60
	U 16*		570765	180,70
	U 20*		570775	180,70
	U 26* ¹²⁾		570750	211,20
	U 32		570785	211,20
	U 16 S (PR-2B)**	Z8	574860 R	148,20
	U 20 S (PR-2B)**	Z8	574862 R	148,20
	U 26 S (PR-2B)**	Z8	574866 R	173,20
	U 32 S (PR-2B)	Z8	574868 R	173,20
	B 16*		570850	210,20
	B 20*		570860	210,20
	B 26		570870	232,50
	B 32		570880	232,50
IVAR Plastic Multi Press PMP	TH 16*		570460	192,90
	TH 20*		570470	192,90
	TH 25*		570495	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 25 S (PR-2B)**	Z8	574792 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 32 S (PR-2B)	Z8	574798 R	158,20
	F 16*		570717	183,80
	F 20*		570727	183,80
	F 26*		570730	199,00
	F 32		570735	199,00
	F 16 S (PR-2B)**	Z8	574728 R	150,80
	F 20 S (PR-2B)**	Z8	574730 R	150,80
	F 26 S (PR-2B)**	Z8	574732 R	163,20
	F 32 S (PR-2B)	Z8	574734 R	163,20
	H 16*		570320	173,60
	H 20*		570350	173,60
	H 25*		570360	173,60
IVT Edelstahl- Presssystem	H 26*		570370	173,60
	H 32		570380	173,60
	U 16*		570765	180,70
	U 20*		570775	180,70
	U 25*		570780	180,70
	U 26* ¹²⁾		570750	211,20
	U 32		570785	211,20
	U 16 S (PR-2B)**	Z8	574860 R	148,20
	U 20 S (PR-2B)**	Z8	574862 R	148,20
	U 25 S (PR-2B)**	Z8	574864 R	148,20
	U 26 S (PR-2B)**	Z8	574866 R	173,20
	U 32 S (PR-2B)	Z8	574868 R	173,20
	B 16*		570850	210,20
	B 20*		570860	210,20
	B 26		570870	232,50
IVT PRIPRESS	B 32		570880	232,50
	M 15		570110	159,90
	M 18 ¹⁾		570120	159,90
	M 22		570130	159,90
	M 28 ¹⁾		570140	159,90
	M 35		570150	159,90
	M 42 (PR-3S)	Z2	572706 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00
	M 76,1 XL (PR-3S)	26 XL ³⁾ / 27 XL 45 kN ⁴⁾	579101 R	1.213,00
	M 88,9 G XL (PR-3S)	26 XL ³⁾ / 27 XL 45 kN ⁴⁾	579110 R	1.416,00
	M 108,0 G XL (PR-3S)	26 XL ³⁾ / 27 XL 45 kN ⁴⁾	579111 R	1.416,00
	M 15 S (PR-2B)	Z8	574738 R	131,20
	M 18 S (PR-2B)	Z8	574740 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20
	TH 16*		570460	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	TH 40		570485	255,80
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 32 S (PR-2B)	Z8	574798 R	158,20

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
J				
Jäger - Aquatec Aquapress H	H 14* H 16* H 17* H 18* H 20* H 26* H 32 U 40 U 50 U 63 (PZ-S)		570310 570320 570330 570340 570350 570370 570380 570790 570795 572365	173,60 173,60 173,60 173,60 173,60 173,60 173,60 257,90 310,00 669,00
Jäger - Aquatec C-Stahl - Press Typ M	M 15 M 18 M 22 M 28 M 35 M 42 (PR-3S) M 54 (PR-3S) M 76,1 XL (PR-3S) M 88,9 G XL (PR-3S) M 108,0 G XL (PR-3S) M 15 S (PR-2B) M 18 S (PR-2B) M 22 S (PR-2B) M 28 S (PR-2B) M 35 S (PR-2B)		570110 570120 570130 570140 570150 572706 R 572708 R 579101 R 579110 R 579111 R 574738 R 574740 R 574742 R 574744 R 574746 R	159,90 159,90 159,90 159,90 159,90 696,00 696,00 1.213,00 1.416,00 1.416,00 131,20 131,20 131,20 131,20 131,20
Jäger - Aquatec Edelstahl - Press Typ M	M 15 M 18 M 22 M 28 M 35 M 42 (PR-3S) M 54 (PR-3S) M 76,1 XL (PR-3S) M 88,9 G XL (PR-3S) M 108,0 G XL (PR-3S) M 15 S (PR-2B) M 18 S (PR-2B) M 22 S (PR-2B) M 28 S (PR-2B) M 35 S (PR-2B)		570110 570120 570130 570140 570150 572706 R 572708 R 579101 R 579110 R 579111 R 574738 R 574740 R 574742 R 574744 R 574746 R	159,90 159,90 159,90 159,90 159,90 696,00 696,00 1.213,00 1.416,00 1.416,00 131,20 131,20 131,20 131,20 131,20
Jäger - Aquatec Kupfer - Press Typ V	V 15 V 18 V 22 V 28 V 35 V 42 V 42 (PR-2B) V 54 V 54 (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B) V 22 S (PR-2B) V 28 S (PR-2B) V 35 S (PR-2B)		570115 570125 570135 570145 570155 570165 572850 R 570175 572851 R 574752 R 574756 R 574758 R 574760 R 574762 R	159,90 159,90 159,90 159,90 159,90 373,00 334,00 383,00 361,00 131,20 131,20 131,20 131,20 131,20
Jansen AG JANSEN COMISA	TH 14* TH 16* TH 20* TH 26* TH 32 TH 40 TH 50 (PZ-S) TH 63 (PZ-S) TH 14 S (PR-2B)** TH 16 S (PR-2B)** TH 20 S (PR-2B)** TH 26 S (PR-2B)** TH 32 S (PR-2B)		570455 570460 570470 570475 570480 570485 572400 572405 574778 R 574782 R 574788 R 574794 R 574798 R	192,90 192,90 192,90 192,90 192,90 255,80 669,00 669,00 158,20 158,20 158,20 158,20 158,20

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
Jaraflex- Presssystem	TH 14* TH 16* TH 17* TH 18* TH 20* TH 25* TH 26* TH 32 TH 40 TH 50 (PZ-S) TH 63 (PZ-S) TH 14 S (PR-2B)** TH 16 S (PR-2B)** TH 17 S (PR-2B)** TH 18 S (PR-2B)** TH 20 S (PR-2B)** TH 25 S (PR-2B)** TH 26 S (PR-2B)** TH 32 S (PR-2B)		570455 570460 570462 570465 570470 570495 570475 570480 570485 572400 572405 574778 R 574782 R 574784 R 574786 R 574788 R 574792 R 574794 R 574798 R	192,90 192,90 192,90 192,90 192,90 192,90 192,90 192,90 255,80 669,00 669,00 158,20 158,20 158,20 158,20 158,20 158,20 158,20 158,20
JUNGWOO JWPress	VUS ½" (OD 15,9 mm) VUS ¾" (OD 22,2 mm) VUS 1" (OD 28,6 mm) VUS 1¼" (OD 34,9 mm) VUS 1½" (OD 41,3 mm) VUS 2" (OD 54,0 mm) VUSFz 2½" (PR-3B) (OD 66,7 mm) VUSFz 3" (PR-3B) (OD 79,4 mm) VUSFz 4" (PR-3B) (OD 104,8 mm)		571770 571775 571780 571785 571790 571795 572819 R 572820 R 572821 R	192,90 192,90 192,90 192,90 373,00 383,00 641,00 641,00 680,00
K				
KAN KAN-therm Press LBP	U 14* U 16* U 20* U 25* U 26* ¹²⁾ U 32 U 40 U 14 S (PR-2B)** U 16 S (PR-2B)** U 20 S (PR-2B)** U 25 S (PR-2B)** U 26 S (PR-2B)** U 32 S (PR-2B)** TH 14* TH 16* TH 20* TH 25* TH 26* TH 32 TH 40 TH 50 (PZ-S) TH 63 (PZ-S) TH 14 S (PR-2B)** TH 16 S (PR-2B)** TH 20 S (PR-2B)** TH 25 S (PR-2B)** TH 26 S (PR-2B)** TH 32 S (PR-2B)**		570760 570765 570775 570780 570750 570785 570790 574858 R 574860 R 574862 R 574864 R 574866 R 574868 R 570455 570460 570470 570495 570475 570480 570485 572400 572405 574778 R 574782 R 574788 R 574792 R 574794 R 574798 R	180,70 180,70 180,70 180,70 211,20 211,20 257,90 148,20 148,20 148,20 148,20 173,20 173,20 192,90 192,90 192,90 192,90 192,90 192,90 255,80 669,00 669,00 158,20 158,20 158,20 158,20 158,20 158,20
KAN KAN-therm Inox	M 15 M 18 ¹⁾ M 22 M 28 ¹⁾ M 35 M 42 (PZ-4G) M 54 (PZ-4G) M 42 (PR-3S) M 54 (PR-3S) M 76,1 XL (PR-3S) M 88,9 G XL (PR-3S) M 108,0 G XL (PR-3S) M 15 S (PR-2B) M 18 S (PR-2B) M 22 S (PR-2B) M 28 S (PR-2B) M 35 S (PR-2B)		570110 570120 570130 570140 570150 570160 570170 572706 R 572708 R 579101 R 579110 R 579111 R 574738 R 574740 R 574742 R 574744 R 574746 R	159,90 159,90 159,90 159,90 159,90 515,00 515,00 696,00 696,00 1.213,00 1.416,00 1.416,00 131,20 131,20 131,20 131,20 131,20

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 227. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 227. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 230.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC, see page 238.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

¹³⁾ Only pressing tongs/S pressing rings (PR-2B) from designation "125" (1st quarter of 2025), "225" (2nd quarter of 2025) etc. can be used.
The designation is stamped on every pressing jaw.

The suitability of REMS pressing tools for pressfitting systems: Date 13.10.2025. For the updated situation regarding suitability status check our website:
www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 288 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
KAN KAN-therm Steel	M 12		570100	159,90
	M 15		570110	159,90
	M 18 ¹⁾		570120	159,90
	M 22		570130	159,90
	M 28 ¹⁾		570140	159,90
	M 35		570150	159,90
	M 42 (PZ-4G)		570160	515,00
	M 54 (PZ-4G)		570170	515,00
	M 42 (PR-3S)	Z2	572706 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108 R	1.213,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
	M 12 S (PR-2B)	Z8	574736 R	131,20
	M 15 S (PR-2B)	Z8	574738 R	131,20
	M 18 S (PR-2B)	Z8	574740 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20
KAN KAN-therm UltraPRESS	U 14*		570760	180,70
	U 16*		570765	180,70
	U 20*		570775	180,70
	U 25*		570780	180,70
	U 26* ¹²⁾		570750	211,20
	U 32		570785	211,20
	U 40		570790	257,90
	U 14 S (PR-2B)**	Z8	574858 R	148,20
	U 16 S (PR-2B)**	Z8	574860 R	148,20
	U 20 S (PR-2B)**	Z8	574862 R	148,20
	U 25 S (PR-2B)**	Z8	574864 R	148,20
	U 26 S (PR-2B)**	Z8	574866 R	173,20
	U 32 S (PR-2B)**	Z8	574868 R	173,20
	TH 14*		570455	192,90
	TH 16*		570460	192,90
	TH 20*		570470	192,90
	TH 25*		570495	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	TH 40		570485	255,80
	TH 50 (PZ-S)		572400	669,00
	TH 63 (PZ-S)		572405	669,00
	TH 14 S (PR-2B)**	Z8	574778 R	158,20
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 25 S (PR-2B)**	Z8	574792 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 32 S (PR-2B)**	Z8	574798 R	158,20
KE KELIT COPPERFIX Kupfer	M 15		570110	159,90
	M 18		570120	159,90
	M 22		570130	159,90
	M 28		570140	159,90
	M 35		570150	159,90
	M 42 (PR-3S)	Z2	572706 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
	M 15 S (PR-2B)	Z8	574738 R	131,20
	M 18 S (PR-2B)	Z8	574740 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20
KE KELIT KELIX KELOX	U 16*		570765	180,70
	U 18*		570770	180,70
	U 20*		570775	180,70
	U 25*		570780	180,70
	U 32		570785	211,20
	U 40		570790	257,90
	U 50		570795	310,00
	U 63 (PZ-S)		572365	669,00
	U 63 (PR-3B)	Z4	572837 R	772,00
	U 75 (PR-3B)	Z4	572828 R	680,00
	U 16 S (PR-2B)**	Z8	574860 R	148,20
	U 18 S (PR-2B)**	Z8	574870 R	148,20
	U 20 S (PR-2B)**	Z8	574862 R	148,20
KE KELIT KELOX-PPSU-W	U 25 S (PR-2B)**	Z8	574864 R	148,20
	U 32 S (PR-2B)	Z8	574868 R	173,20
	U 16*		570765	180,70
	U 18*		570770	180,70
	U 20*		570775	180,70
	U 25*		570780	180,70
	U 32		570785	211,20
	U 40		570790	257,90
	U 50		570795	310,00
	U 63 (PZ-S)		572365	669,00
	U 63 (PR-3B)	Z4	572837 R	772,00
	U 75 (PR-3B)	Z4	572828 R	680,00
	U 16 S (PR-2B)**	Z8	574860 R	148,20
	U 18 S (PR-2B)**	Z8	574870 R	148,20
	U 20 S (PR-2B)**	Z8	574862 R	148,20
	U 25 S (PR-2B)**	Z8	574864 R	148,20
	U 32 S (PR-2B)	Z8	574868 R	173,20

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
KE KELIT KELOX-ULTRAX	U 16*		570765	180,70
	U 18*		570770	180,70
	U 20*		570775	180,70
	U 25*		570780	180,70
	U 32		570785	211,20
	U 40		570790	257,90
	U 50		570795	310,00
	U 63 (PZ-S)		572365	669,00
	U 63 (PR-3B)	Z4	572837 R	772,00
	U 75 (PR-3B)	Z4	572828 R	680,00
	U 16 S (PR-2B)**	Z8	574860 R	148,20
	U 18 S (PR-2B)**	Z8	574870 R	148,20
	U 20 S (PR-2B)**	Z8	574862 R	148,20
	U 25 S (PR-2B)**	Z8	574864 R	148,20
	U 32 S (PR-2B)	Z8	574868 R	173,20
KE KELIT KELOX-ULTRAX-W	U 16*		570765	180,70
	U 18*		570770	180,70
	U 20*		570775	180,70
	U 25*		570780	180,70
	U 32		570785	211,20
	U 40		570790	257,90
	U 50		570795	310,00
	U 63 (PZ-S)		572365	669,00
	U 63 (PR-3B)	Z4	572837 R	772,00
	U 75 (PR-3B)	Z4	572828 R	680,00
	U 16 S (PR-2B)**	Z8	574860 R	148,20
	U 18 S (PR-2B)**	Z8	574870 R	148,20
	U 20 S (PR-2B)**	Z8	574862 R	148,20
KE KELIT KELOX-WINDOW-X-U	U 25 S (PR-2B)**	Z8	574864 R	148,20
	U 32 S (PR-2B)	Z8	574868 R	173,20
	U 16*		570765	180,70
	U 18*		570770	180,70
	U 20*		570775	180,70
	U 25*		570780	180,70
	U 32		570785	211,20
	U 40		570790	257,90
	U 50		570795	310,00
	U 63 (PZ-S)		572365	669,00
	U 63 (PR-3B)	Z4	572837 R	772,00
	U 75 (PR-3B)	Z4	572828 R	680,00
	U 16 S (PR-2B)**	Z8	574860 R	148,20
KE KELIT steelFIX C-Stahl	U 18 S (PR-2B)**	Z8	574870 R	148,20
	U 20 S (PR-2B)**	Z8	574862 R	148,20
	U 25 S (PR-2B)**	Z8	574864 R	148,20
	U 32 S (PR-2B)	Z8	574868 R	173,20
	M 15		570110	159,90
	M 18		570120	159,90
	M 22		570130	159,90
	M 28		570140	159,90
	M 35		570150	159,90
	M 42 (PR-3S)	Z2	572706 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
KE KELIT steelFIX Edelstahl	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
	M 15 S (PR-2B)	Z8	574738 R	131,20
	M 18 S (PR-2B)	Z8	574740 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20
	M 15		570110	159,90
	M 18		570120	159,90
	M 22		570130	159,90
	M 28		570140	159,90
	M 35		570150	159,90
	M 42 (PR-3S)	Z2	572706 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00
KEMBLA KemPress (AUS)	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
	M 15 S (PR-2B)	Z8	574738 R	131,20
	M 18 S (PR-2B)	Z8	574740 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20
	VAU 15 (OD 12,7 mm)		572687	164,90
	VAU 20 (OD 19,1 mm)		572689	164,90
	VAU 25 (OD 25,4 mm)		572691	164,90
	VAU 32 (OD 31,8 mm)		572693	174,00
	VAU 40 (OD 38,1 mm)		572695	257,90
	VAU 50 (OD 50,8 mm)		572697	457,00
KEMBLA KemPress Gas (AUS)	VAU 15 (OD 12,7 mm)		572687	164,90
	VAU 20 (OD 19,1 mm)		572689	164,90
	VAU 25 (OD 25,4 mm)		572691	164,90
	VAU 32 (OD 31,8 mm)		572693	174,00
	VAU 40 (OD 38,1 mm)		572695	257,90
	VAU 50 (OD 50,8 mm)		572697	457,00
KISAN Kisan KD	KI 16*		571360	204,10
	KI 20*		571370	204,10
	KI 25*		571375	204,10
	TH 16*		570460	192,90
	TH 20*		570470	192,90
	TH 25*		570495	192,90
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 25 S (PR-2B)**	Z8	574792 R	158,20

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
KISAN Kisan WL/WP	KI 16*		571360	204,10	LK Systems LK >B-Press	V 12		570107	159,90
	KI 20*		571370	204,10		V 15		570115	159,90
	KI 25*		571375	204,10		V 18		570125	159,90
	KI 32		571380	275,10		V 22		570135	159,90
	TH 16*		570460	192,90		V 28		570145	159,90
	TH 20*		570470	192,90		V 35		570155	159,90
	TH 25*		570495	192,90		V 42		570165	373,00
	TH 32		570480	192,90		V 54		570175	383,00
	TH 16 S (PR-2B)**	Z8	574782 R	158,20		V 12 S (PR-2B)	Z8	574748 R	131,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20		V 15 S (PR-2B)	Z8	574752 R	131,20
	TH 25 S (PR-2B)**	Z8	574792 R	158,20		V 18 S (PR-2B)	Z8	574756 R	131,20
	TH 32 S (PR-2B)	Z8	574798 R	158,20		V 22 S (PR-2B)	Z8	574758 R	131,20
KISAN Kisan WR	TH 20*		570470	192,90		V 28 S (PR-2B)	Z8	574760 R	131,20
	TH 25*		570495	192,90		V 35 S (PR-2B)	Z8	574762 R	131,20
	TH 32		570480	192,90	LK Systems LK >B-Press Elförzinkat	V 12		570107	159,90
	TH 20 S (PR-2B)**	Z8	574788 R	158,20		V 15		570115	159,90
	TH 25 S (PR-2B)**	Z8	574792 R	158,20		V 18		570125	159,90
	TH 32 S (PR-2B)	Z8	574798 R	158,20		V 22		570135	159,90
	U 20*		570775	180,70		V 28		570145	159,90
	U 25*		570780	180,70		V 35		570155	159,90
	U 32		570785	211,20		V 42		570165	373,00
	U 40		570790	257,90		V 54		570175	383,00
	U 50		570795	310,00		V 12 S (PR-2B)	Z8	574748 R	131,20
	U 63 (PZ-S)		572365	669,00		V 15 S (PR-2B)	Z8	574752 R	131,20
	U 75 (PR-3B)		572828 R	680,00		V 18 S (PR-2B)	Z8	574756 R	131,20
	U 20 S (PR-2B)**	Z8	574862 R	148,20		V 22 S (PR-2B)	Z8	574758 R	131,20
	U 25 S (PR-2B)**	Z8	574864 R	148,20		V 28 S (PR-2B)	Z8	574760 R	131,20
	U 32 S (PR-2B)	Z8	574868 R	173,20		V 35 S (PR-2B)	Z8	574762 R	131,20
KISAN Kistal C	M 15		570110	159,90	LK Systems LK >B-Press Gas	V 15		570115	159,90
	M 18		570120	159,90		V 18		570125	159,90
	M 22		570130	159,90		V 22		570135	159,90
	M 28		570140	159,90		V 28		570145	159,90
	M 35		570150	159,90		V 35		570155	159,90
	M 42 (PR-3S)	Z2	572706 R	696,00		V 42		570165	373,00
	M 54 (PR-3S)	Z2	572708 R	696,00		V 54		570175	383,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00		V 15 S (PR-2B)	Z8	574752 R	131,20
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00		V 18 S (PR-2B)	Z8	574756 R	131,20
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00		V 22 S (PR-2B)	Z8	574758 R	131,20
	M 15 S (PR-2B)	Z8	574738 R	131,20		V 28 S (PR-2B)	Z8	574760 R	131,20
	M 18 S (PR-2B)	Z8	574740 R	131,20		V 35 S (PR-2B)	Z8	574762 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20	LK Systems LK Universal	TH 16*		570460	192,90
	M 28 S (PR-2B)	Z8	574744 R	131,20		TH 20*		570470	192,90
	M 35 S (PR-2B)	Z8	574746 R	131,20		TH 25*		570495	192,90
KISAN Kistal Inox	M 15		570110	159,90		TH 32		570480	192,90
	M 18		570120	159,90		TH 40		570485	255,80
	M 22		570130	159,90		TH 50 (PZ-S)		572400	669,00
	M 28		570140	159,90		TH 63 (PZ-S)		572405	669,00
	M 35		570150	159,90	M				
	M 42 (PR-3S)	Z2	572706 R	696,00	MAINCOR	U 16*		570765	180,70
	M 54 (PR-3S)	Z2	572708 R	696,00		U 20*		570775	180,70
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00	MAINPRESS	U 25*		570780	180,70
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00		U 32		570785	211,20
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00		U 40		570790	257,90
	M 15 S (PR-2B)	Z8	574738 R	131,20		U 50		570795	310,00
	M 18 S (PR-2B)	Z8	574740 R	131,20		U 63 (PZ-S)		572365	669,00
	M 22 S (PR-2B)	Z8	574742 R	131,20		U 63 (PR-3B)	Z4	572837 R	772,00
	M 28 S (PR-2B)	Z8	574744 R	131,20	MAINCOR	U 16*		570765	180,70
	M 35 S (PR-2B)	Z8	574746 R	131,20		U 20*		570775	180,70
L					M				
LEGEND-PRESS press fitting system	VUS ½" (OD 15,9 mm)		571770	192,90	MAINFLOR	U 16*		570765	180,70
	VUS ¾" (OD 22,2 mm)		571775	192,90		U 20*		570775	180,70
	VUS 1" (OD 28,6 mm)		571780	192,90	Mair Heiztechnik M-Press	H 11,5*		570315	173,60
	VUS 1¼" (OD 34,9 mm)		571785	192,90		TH 16*		570460	192,90
	VUS 1½" (OD 41,3 mm)		571790	373,00		TH 20*		570470	192,90
	VUS 2" (OD 54,0 mm)		571795	383,00		TH 26*		570475	192,90
	VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z5	572819 R	641,00		TH 32		570480	192,90
	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820 R	641,00		TH 40		570485	255,80
	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821 R	680,00		TH 16 S (PR-2B)**	Z8	574782 R	158,20
						TH 20 S (PR-2B)**	Z8	574788 R	158,20
						TH 26 S (PR-2B)**	Z8	574794 R	158,20
						TH 32 S (PR-2B)	Z8	574798 R	158,20

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 227. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 227. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 230.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC, see page 238.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

¹³⁾ Only pressing tongs/S pressing rings (PR-2B) from designation "125" (1st quarter of 2025), "225" (2nd quarter of 2025) etc. can be used.
The designation is stamped on every pressing jaw.

The suitability of REMS pressing tools for pressfitting systems: Date 13.10.2025. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 288 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
Ma.s.ter System PRESSMASTER	TH 14*		570455	192,90	M-Press Fittings Ltd M-Press Copper	M 15		570110	159,90
	TH 16*		570460	192,90		M 22		570130	159,90
	TH 18*		570465	192,90		M 28		570140	159,90
	TH 20*		570470	192,90		M 35		570150	159,90
	TH 25*		570495	192,90		M 42 (PR-3S)	Z2	572706 R	696,00
	TH 26*		570475	192,90		M 54 (PR-3S)	Z2	572708 R	696,00
	TH 32		570480	192,90		M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107 R	1.213,00
	TH 40		570485	255,80		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	TH 50 (PZ-S)		572400	669,00		M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
	TH 63 (PZ-S)		572405	669,00		M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
	TH 14 S (PR-2B)**	Z8	574778 R	158,20		M 15 S (PR-2B)	Z8	574738 R	131,20
	TH 16 S (PR-2B)**	Z8	574782 R	158,20		M 22 S (PR-2B)	Z8	574742 R	131,20
	TH 18 S (PR-2B)**	Z8	574786 R	158,20		M 28 S (PR-2B)	Z8	574744 R	131,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20		M 35 S (PR-2B)	Z8	574746 R	131,20
	TH 25 S (PR-2B)**	Z8	574792 R	158,20	M-Press Fittings Ltd M-Press Stainless Steel	M 15		570110	159,90
	TH 26 S (PR-2B)**	Z8	574794 R	158,20		M 22		570130	159,90
	TH 32 S (PR-2B)	Z8	574798 R	158,20		M 28		570140	159,90
	H 14*		570310	173,60		M 35		570150	159,90
	H 16*		570320	173,60		M 42 (PR-3S)	Z2	572706 R	696,00
	H 18*		570340	173,60		M 54 (PR-3S)	Z2	572708 R	696,00
	H 20*		570350	173,60		XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108 R	1.213,00
	H 26*		570370	173,60		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	H 32		570380	173,60		M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
	H 40 (PZ-4G)		570390	586,00		M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
	U 14*		570760	180,70		M 15 S (PR-2B)	Z8	574738 R	131,20
	U 16*		570765	180,70		M 22 S (PR-2B)	Z8	574742 R	131,20
	U 18*		570770	180,70		M 28 S (PR-2B)	Z8	574744 R	131,20
	U 20*		570775	180,70		M 35 S (PR-2B)	Z8	574746 R	131,20
	U 25*		570780	180,70	Mueller Streamline PRS Copper Press	VUS ½" (OD 15,9 mm)		571770	192,90
	U 32		570785	211,20		VUS ¾" (OD 22,2 mm)		571775	192,90
	U 40		570790	257,90		VUS 1" (OD 28,6 mm)		571780	192,90
	U 50		570795	310,00		VUS 1¼" (OD 34,9 mm)		571785	192,90
	U 63 (PR-3B)	Z4	572837 R	772,00		VUS 1½" (OD 41,3 mm)		571790	373,00
	U 63 (PZ-S)		572365	669,00		VUS 2" (OD 54,0 mm)		571795	383,00
	H 16*		570320	173,60		VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z5	572819 R	641,00
	H 20*		570350	173,60		VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820 R	641,00
	H 25*		570360	173,60		VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821 R	680,00
	H 32		570380	173,60	MULTITHERM PRESSSYSTEM	TH 16*		570460	192,90
	Rfz 16*		571325	201,00		TH 20*		570470	192,90
	Rfz 20*		571330	201,00		TH 26*		570475	192,90
	Rfz 25		571335	201,00		TH 32		570480	192,90
	Rfz 32		571340	201,00		TH 40		570485	255,80
	TH 16*		570460	192,90		TH 50 (PZ-S)		572400	669,00
	TH 20*		570470	192,90		TH 63 (PZ-S)		572405	669,00
	TH 25*		570495	192,90		THz 75 (PR-3B)	Z4	572829 R	641,00
	TH 32		570480	192,90		TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 40		570485	255,80		TH 20 S (PR-2B)**	Z8	574788 R	158,20
Meier Tobler metalplast - Stramax Serie XPRT	TH 50 (PZ-S)		572400	669,00		TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 63 (PZ-S)		572405	669,00		TH 32 S (PR-2B)	Z8	574798 R	158,20
	TH 16 S (PR-2B)**	Z8	574782 R	158,20	Multicapas Industrial AIS PEX	Rfz 16*		571325	201,00
	TH 20 S (PR-2B)**	Z8	574788 R	158,20		Rfz 20*		571330	201,00
	TH 25 S (PR-2B)**	Z8	574792 R	158,20		Rfz 25		571335	201,00
	TH 32 S (PR-2B)	Z8	574798 R	158,20		Rfz 32		571340	201,00
	U 16*		570765	180,70		U 16*		570765	180,70
	U 20*		570775	180,70		U 20*		570775	180,70
	U 25*		570780	180,70		U 25*		570780	180,70
	U 32		570785	211,20		U 32		570785	211,20
	U 40		570790	257,90		U 16 S (PR-2B)**	Z8	574860 R	148,20
	U 50		570795	310,00		U 20 S (PR-2B)**	Z8	574862 R	148,20
	U 63 (PZ-S)		572365	669,00		U 25 S (PR-2B)**	Z8	574864 R	148,20
	U 63 (PR-3B)	Z4	572837 R	772,00		U 32 S (PR-2B)**	Z8	574868 R	173,20
	U 16 S (PR-2B)**	Z8	574860 R	148,20	Multicapas Industrial AIS PPSU	H 16*		570320	173,60
	U 20 S (PR-2B)**	Z8	574862 R	148,20		H 20*		570350	173,60
	U 25 S (PR-2B)**	Z8	574864 R	148,20		H 25*		570360	173,60
	U 32 S (PR-2B)	Z8	574868 R	173,20		H 26*		570370	173,60
	U 16*		570765	180,70		H 32		570380	173,60
	U 18*		570770	180,70		Rfz 16*		571325	201,00
	U 20*		570775	180,70		Rfz 20*		571330	201,00
	U 25*		570780	180,70		Rfz 25		571335	201,00
	U 32		570785	211,20		Rfz 32		571340	201,00
	U 16 S (PR-2B)**	Z8	574860 R	148,20		TH 16*		570460	192,90
	U 18 S (PR-2B)**	Z8	574870 R	148,20		TH 20*		570470	192,90
METALGRUP Permatubo	U 20 S (PR-2B)**	Z8	574862 R	148,20		TH 25*		570495	192,90
	U 25 S (PR-2B)**	Z8	574864 R	148,20		TH 26*		570475	192,90
	U 32 S (PR-2B)	Z8	574868 R	173,20		TH 32		570480	192,90
	U 16*		570765	180,70		TH 40		570485	255,80
	U 18*		570770	180,70		TH 50 (PZ-S)		572400	669,00
	U 20*		570775	180,70		TH 63 (PZ-S)		572405	669,00
	U 25*		570780	180,70		TH 16 S (PR-2B)**	Z8	574782 R	158,20
	U 32		570785	211,20		TH 20 S (PR-2B)**	Z8	574788 R	158,20
	U 16 S (PR-2B)**	Z8	574860 R	148,20		TH 25 S (PR-2B)**	Z8	574792 R	158,20
	U 18 S (PR-2B)**	Z8	574870 R	148,20		TH 26 S (PR-2B)**	Z8	574794 R	158,20
METALGRUP PexGrup	U 20 S (PR-2B)**	Z8	574862 R	148,20		TH 32 S (PR-2B)	Z8	574798 R	158,20
	U 25 S (PR-2B)**	Z8	574864 R	148,20		U 16*		570765	180,70
	U 32 S (PR-2B)	Z8	574868 R	173,20		U 20*		570775	180,70
	Rfz 16*		571325	201,00		U 25*		570780	180,70
	Rfz 20*		571330	201,00		U 26* ¹²⁾		570750	211,20
METALGRUP MultiGrup	Rfz 25		571335	201,00		U 32		570785	211,20
	Rfz 32		571340	201,00		U 40		570790	257,90
	U 16*		570765	180,70		U 50		570795	310,00
	U 18*		570770	180,70		U 63 (PZ-S)		572365	669,00
	U 20*		570775	180,70		U 63 (PR-3B)	Z4	572837 R	772,00
	U 25*		570780	180,70		U 16 S (PR-2B)**	Z8	574860 R	148,20
	U 32		570785	211,20		U 20 S (PR-2B)**	Z8	574862 R	148,20
	U 16 S (PR-2B)**	Z8	574860 R	148,20		U 25 S (PR-2B)**	Z8	574864 R	148,20
	U 18 S (PR-2B)**	Z8	574870 R	148,20		U 32 S (PR-2B)**	Z8	574868 R	173,20
	U 20 S (PR-2B)**	Z8	574862 R	148,20	M-Press Fittings Ltd M-Press Carbon Steel	M 15		570110	159,90
	U 25 S (PR-2B)**	Z8	574864 R	148,20		M 22		570130	159,90
	U 32 S (PR-2B)**	Z8	574868 R	173,20		M 28 ⁹⁾		570140	159,90
M-Press Fittings Ltd M-Press Carbon Steel	M 35		570150	159,90		M 35		570150	159,90
	M 42 (PR-3S)	Z2	572706 R	696,00		M 42 (PR-3S)	Z2	572706 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00		XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108 R	1.213,00
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108 R	1.213,00		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00		M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00		M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00		M 15 S (PR-2B)	Z8	574738 R	131,20
	M 15 S (PR-2B)	Z8	574738 R	131,20		M 22 S (PR-2B)	Z8	574742 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20		M 28 S (PR-2B)	Z8	574744 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20		M 35 S (PR-2B)	Z8	574746 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20					

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
Multicap Industrial AIS XPRT	H 16*		570320	173,60	Multicap Industrial multitubo systems MM	H 16*		570320	173,60
	H 20*		570350	173,60		H 20*		570350	173,60
	H 25*		570360	173,60		H 25*		570360	173,60
	H 26*		570370	173,60		H 26*		570370	173,60
	H 32		570380	173,60		H 32		570380	173,60
	RFz 16*		571325	201,00		RFz 16*		571325	201,00
	RFz 20*		571330	201,00		RFz 20*		571330	201,00
	RFz 25		571335	201,00		RFz 25		571335	201,00
	RFz 32		571340	201,00		RFz 32		571340	201,00
	TH 16*		570460	192,90		TH 16*		570460	192,90
	TH 20*		570470	192,90		TH 20*		570470	192,90
	TH 25*		570495	192,90		TH 20*		570470	192,90
	TH 26*		570475	192,90		TH 25*		570495	192,90
	TH 32		570480	192,90		TH 26*		570475	192,90
	TH 40		570485	255,80		TH 32		570480	192,90
	TH 50 (PZ-S)		572400	669,00		TH 40		570485	255,80
	TH 63 (PZ-S)		572405	669,00		TH 50 (PZ-S)		572400	669,00
	THz 75 (PR-3B)	Z4	572829 R	641,00		TH 63 (PZ-S)		572405	669,00
	TH 16 S (PR-2B)**	Z8	574782 R	158,20		THz 75 (PR-3B)	Z4	572829 R	641,00
	TH 20 S (PR-2B)**	Z8	574788 R	158,20		TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 25 S (PR-2B)**	Z8	574792 R	158,20		TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20		TH 25 S (PR-2B)**	Z8	574792 R	158,20
	TH 32 S (PR-2B)**	Z8	574798 R	158,20		TH 26 S (PR-2B)**	Z8	574794 R	158,20
	U 16*		570765	180,70		TH 32 S (PR-2B)**	Z8	574798 R	158,20
	U 20*		570775	180,70		U 16*		570765	180,70
	U 25*		570780	180,70		U 20*		570775	180,70
	U 26* ¹²⁾		570750	211,20		U 25*		570780	180,70
	U 32		570785	211,20		U 26* ¹²⁾		570750	211,20
	U 40		570790	257,90		U 32		570785	211,20
	U 50		570795	310,00		U 40		570790	257,90
	U 63 (PZ-S)		572365	669,00		U 50		570795	310,00
	U 63 (PR-3B)	Z4	572837 R	772,00		U 63 (PZ-S)		572365	669,00
	U 75 (PR-3B)	Z4	572828 R	680,00		U 63 (PR-3B)	Z4	572837 R	772,00
	U 16 S (PR-2B)**	Z8	574860 R	148,20		U 75 (PR-3B)	Z4	572828 R	680,00
	U 20 S (PR-2B)**	Z8	574862 R	148,20		U 16 S (PR-2B)**	Z8	574860 R	148,20
	U 25 S (PR-2B)**	Z8	574864 R	148,20		U 20 S (PR-2B)**	Z8	574862 R	148,20
	U 26 S (PR-2B)**	Z8	574866 R	173,20		U 25 S (PR-2B)**	Z8	574864 R	148,20
	U 32 S (PR-2B)**	Z8	574868 R	173,20		U 26 S (PR-2B)**	Z8	574866 R	173,20
						U 32 S (PR-2B)**	Z8	574868 R	173,20
Multicap Industrial	U 16*		570765	180,70	N				
multitubo systems MC	U 18*		570770	180,70	NEUTHERM	H 16*		570320	173,60
	U 20*		570775	180,70	MEKUPRESS-HT	H 20*		570350	173,60
	U 25*		570780	180,70		H 26*		570370	173,60
	U 32		570785	211,20		H 32		570380	173,60
	U 40		570790	257,90		H 40 (PZ-4G)		570390	586,00
	U 50		570795	310,00		U 40		570790	257,90
	U 63 (PZ-S)		572365	669,00	NIBCO	VUS ½" (OD 15,9 mm)		571770	192,90
	U 63 (PR-3B)	Z4	572837 R	772,00	Press System Copper	VUS ¾" (OD 22,2 mm)		571775	192,90
	U 75 (PR-3B)	Z4	572828 R	680,00		VUS 1" (OD 28,6 mm)		571780	192,90
	U 16 S (PR-2B)**	Z8	574860 R	148,20		VUS 1¼" (OD 34,9 mm)		571785	192,90
	U 18 S (PR-2B)**	Z8	574870 R	148,20		VUS 1½" (OD 41,3 mm)		571790	373,00
	U 20 S (PR-2B)**	Z8	574862 R	148,20		VUS 2" (OD 54,0 mm)		571795	383,00
	U 25 S (PR-2B)**	Z8	574864 R	148,20	NICOLL FLUXO	TH 16*		570460	192,90
	U 32 S (PR-2B)	Z8	574868 R	173,20		TH 20*		570470	192,90
						TH 26*		570475	192,90
						TH 32		570480	192,90
						TH 40		570485	255,80
						TH 50 (PZ-S)		572400	669,00
						TH 63 (PZ-S)		572405	669,00
						THz 75 (PR-3B)	Z4	572829 R	641,00
						TH 16 S (PR-2B)**	Z8	574782 R	158,20
						TH 20 S (PR-2B)**	Z8	574788 R	158,20
						TH 26 S (PR-2B)**	Z8	574794 R	158,20
						TH 32 S (PR-2B)	Z8	574798 R	158,20

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 227. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 227. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 230.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 238.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

¹³⁾ Only pressing tongs/S pressing rings (PR-2B) from designation "125" (1st quarter of 2025), "225" (2nd quarter of 2025) etc. can be used.

The designation is stamped on every pressing jaw.

The suitability of REMS pressing tools for pressfitting systems: Date 13.10.2025. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 288 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
NUPI Industrie Italiane Multinupi	B 16*		570850	210,20
	B 18*		570855	210,20
	B 20*		570860	210,20
	B 26		570870	232,50
	B 32		570880	232,50
	F 16*		570717	183,80
	F 18*		570720	183,80
	F 20*		570727	183,80
	F 26*		570730	199,00
	F 32		570735	199,00
	F 16 S (PR-2B)**	Z8	574728 R	150,80
	F 20 S (PR-2B)**	Z8	574730 R	150,80
	F 26 S (PR-2B)**	Z8	574732 R	163,20
	F 32 S (PR-2B)	Z8	574734 R	163,20
	H 16*		570320	173,60
	H 18*		570340	173,60
	H 20*		570350	173,60
	H 25*		570360	173,60
	H 26*		570370	173,60
	H 32		570380	173,60
	TH 16*		570460	192,90
	TH 18*		570465	192,90
	TH 20*		570470	192,90
	TH 25*		570495	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 18 S (PR-2B)**	Z8	574786 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 25 S (PR-2B)**	Z8	574792 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 32 S (PR-2B)	Z8	574798 R	158,20
	U 14*		570760	180,70
	U 16*		570765	180,70
	U 18*		570770	180,70
	U 20*		570775	180,70
	U 25*		570780	180,70
	U 26* ¹²⁾		570750	211,20
	U 32		570785	211,20
	U 40		570790	257,90
	U 50		570795	310,00
	U 63 (PR-3B)	Z4	572837 R	772,00
	U 63 (PZ-S)		572365	669,00
	U 14 S (PR-2B)**	Z8	574858 R	148,20
	U 16 S (PR-2B)**	Z8	574860 R	148,20
	U 18 S (PR-2B)**	Z8	574870 R	148,20
	U 20 S (PR-2B)**	Z8	574862 R	148,20
	U 25 S (PR-2B)**	Z8	574864 R	148,20
	U 26 S (PR-2B)**	Z8	574866 R	173,20
	U 32 S (PR-2B)	Z8	574868 R	173,20
Nussbaum	VMP ¾" (ØD 17,2 mm)		571740	222,30
Optifitt-Press	VMP ½" G (ØD 21,3 mm)		571766 R	222,30
	VMPz ¾" (ØD 26,9 mm)		571764	222,30
	VMPz 1" (ØD 33,7 mm)		571767	222,30
	VMPz 1½" (PZ-S) (ØD 42,4 mm)		572413	730,00
	VMPz 1½" (PR-3B) (ØD 48,3 mm)	Z5	572844 R	505,00
	VMPz 2" (PR-3B) (ØD 60,3 mm)	Z5	572845 R	505,00
Nussbaum Optiflex-Flowpress	VRX 16		571750	202,00
	VRX 20		571752	202,00
	VRX 25		571754	222,30
	VRX 32		571756	222,30
	VRX 40		571758	309,00
	VRX 50		571760	362,00
	VRX 63		571797	699,00
Nussbaum Optipress Aquaplus	V 15		570115	159,90
	V 18		570125	159,90
	V 22		570135	159,90
	V 28		570145	159,90
	V 35		570155	159,90
	V 42		570165	373,00
	V 42 (PR-2B)	Z2	572850 R	334,00
	V 54		570175	383,00
	V 54 (PR-2B)	Z2	572851 R	361,00
	VFz 64,0 (PR-3B)	Z5	572815 R	641,00
	VFz 76,1 (PR-3B)	Z5	572816 R	641,00
	VFz 88,9 (PR-3B)	Z5	572817 R	680,00
	VFz 108,0 (PR-3B)	Z5	572818 R	680,00
	V 15 S (PR-2B)	Z8	574752 R	131,20
	V 18 S (PR-2B)	Z8	574756 R	131,20
	V 22 S (PR-2B)	Z8	574758 R	131,20
	V 28 S (PR-2B)	Z8	574760 R	131,20
	V 35 S (PR-2B)	Z8	574762 R	131,20
Nussbaum Optipress-Gaz	V 15		570115	159,90
	V 18		570125	159,90
	V 22		570135	159,90
	V 28		570145	159,90
	V 35		570155	159,90
	V 42		570165	373,00
	V 42 (PR-2B)	Z2	572850 R	334,00
	V 54		570175	383,00
	V 54 (PR-2B)	Z2	572851 R	361,00
	VFz 64,0 (PR-3B)	Z5	572815 R	641,00
	VFz 76,1 (PR-3B)	Z5	572816 R	641,00
	VFz 88,9 (PR-3B)	Z5	572817 R	680,00
	VFz 108,0 (PR-3B)	Z5	572818 R	680,00
	V 15 S (PR-2B)	Z8	574752 R	131,20
	V 18 S (PR-2B)	Z8	574756 R	131,20
	V 22 S (PR-2B)	Z8	574758 R	131,20
	V 28 S (PR-2B)	Z8	574760 R	131,20
	V 35 S (PR-2B)	Z8	574762 R	131,20

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
Nussbaum Optipress-Therm	V 15		570115	159,90
	V 18		570125	159,90
	V 22		570135	159,90
	V 28		570145	159,90
	V 35		570155	159,90
	V 42		570165	373,00
	V 42 (PR-2B)	Z2	572850 R	334,00
	V 54		570175	383,00
	V 54 (PR-2B)	Z2	572851 R	361,00
	VFz 64,0 (PR-3B)	Z5	572815 R	641,00
	VFz 76,1 (PR-3B)	Z5	572816 R	641,00
	VFz 88,9 (PR-3B)	Z5	572817 R	680,00
	VFz 108,0 (PR-3B)	Z5	572818 R	680,00
	V 15 S (PR-2B)	Z8	574752 R	131,20
	V 18 S (PR-2B)	Z8	574756 R	131,20
V 22 S (PR-2B)	Z8	574758 R	131,20	
V 28 S (PR-2B)	Z8	574760 R	131,20	
V 35 S (PR-2B)	Z8	574762 R	131,20	
O				
Oventrop Cofit P	H 16 A*		570620	225,60
	H 20 A*		570650	225,60
	H 26 A*		570670	225,60
	H 32 A		570680	225,60
	H 40 A		570690	387,00
	U 50		570795	310,00
	U 63 (PR-3B)	Z4	572837 R	772,00
U 63 (PZ-S)		572365	669,00	
Oventrop Cofit PD	H 16 A*		570620	225,60
	H 20 A*		570650	225,60
	H 26 A*		570670	225,60
Oventrop Cofit PDK	H 16 A*		570620	225,60
	H 20 A*		570650	225,60
Oventrop Cofit PD-HT	H 16 A*		570620	225,60
	H 20 A*		570650	225,60
	H 25 A*		570660	225,60
Oventrop Cofit PDK-HT	H 16 A*		570620	225,60
	H 20 A*		570650	225,60
P				
PBTub SERTIPRESS	Rfz 12*		571320	201,00
	Rfz 16*		571325	201,00
	Rfz 20*		571330	201,00
	Rfz 25		571335	201,00
PBTub SERTI-STEEL	M 15		570110	159,90
	M 18		570120	159,90
	M 22		570130	159,90
	M 28		570140	159,90
	M 35		570150	159,90
	M 42 (PR-3S)	Z2	572706 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
	M 15 S (PR-2B)	Z8	574738 R	131,20
	M 18 S (PR-2B)	Z8	574740 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20
M 35 S (PR-2B)	Z8	574746 R	131,20	
Pegler Yorkshire	> Aalberts integrated piping systems			
PERFEXIM PERFEKT SYSTEM	U 16*		570765	180,70
	U 20*		570775	180,70
	U 25*		570780	180,70
	U 32		570785	211,20
	U 16 S (PR-2B)**	Z8	574860 R	148,20
	U 20 S (PR-2B)**	Z8	574862 R	148,20
PERFEXIM PERFEKT SYSTEM PLUS	U 25 S (PR-2B)**	Z8	574864 R	148,20
	U 32 S (PR-2B)	Z8	574868 R	173,20
	U 16*		570765	180,70
	U 20*		570775	180,70
	U 25*		570780	180,70
	U 32		570785	211,20
PERFEXIM PERFEKT SYSTEM PLUS	U 40		570790	257,90
	U 50		570795	310,00
	U 63 (PZ-S)		572365	669,00
	U 16 S (PR-2B)**	Z8	574860 R	148,20
	U 20 S (PR-2B)**	Z8	574862 R	148,20
	U 25 S (PR-2B)**	Z8	574864 R	148,20
	U 32 S (PR-2B)	Z8	574868 R	173,20
	TH 16*		570460	192,90
	TH 20*		570470	192,90
	TH 25*		570495	192,90
	TH 32		570480	192,90
	TH 40		570485	255,80
	TH 50 (PZ-S)		572400	669,00
	TH 63 (PZ-S)		572405	669,00
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 25 S (PR-2B)**	Z8	574792 R	158,20
	TH 32 S (PR-2B)	Z8	574798 R	158,20

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	
PERFILTUBO PERFILALUPEX	U 16*		570765	180,70	Pipetec Connect	TH 16*		570460	192,90	
	U 18*		570770	180,70		TH 20*		570470	192,90	
	U 20*		570775	180,70		TH 26*		570475	192,90	
	U 25*		570780	180,70		TH 32		570480	192,90	
	U 32		570785	211,20		TH 40		570485	255,80	
	U 40		570790	257,90		TH 50 (PZ-S)		572400	669,00	
	U 50		570795	310,00		TH 63 (PZ-S)		572405	669,00	
	U 63 (PR-3B)	Z4	572837 R	772,00		TH 16 S (PR-2B)**	Z8	574782 R	158,20	
	U 63 (PZ-S)		572365	669,00		TH 20 S (PR-2B)**	Z8	574788 R	158,20	
	U 75 (PR-3B)	Z4	572828 R	680,00		TH 26 S (PR-2B)**	Z8	574794 R	158,20	
PERFILTUBO PERFILPRESS	M 15		570110	159,90	PLASTICA ALFA Multipex	TH 32 S (PR-2B)	Z8	574798 R	158,20	
	M 18		570120	159,90		U 16*		570765	180,70	
	M 22		570130	159,90		U 20*		570775	180,70	
	M 28		570140	159,90		U 32		570785	211,20	
	M 35		570150	159,90		TH 16*		570460	192,90	
	M 42 (PR-3S)	Z2	572706 R	696,00		TH 20*		570470	192,90	
	M 54 (PR-3S)	Z2	572708 R	696,00		TH 26*		570475	192,90	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00		TH 32		570480	192,90	
	M 15 S (PR-2B)	Z8	574738 R	131,20		TH 16 S (PR-2B)**	Z8	574782 R	158,20	
	M 18 S (PR-2B)	Z8	574740 R	131,20		TH 20 S (PR-2B)**	Z8	574788 R	158,20	
	M 22 S (PR-2B)	Z8	574742 R	131,20		TH 26 S (PR-2B)**	Z8	574794 R	158,20	
	M 28 S (PR-2B)	Z8	574744 R	131,20		TH 32 S (PR-2B)	Z8	574798 R	158,20	
	M 35 S (PR-2B)	Z8	574746 R	131,20		PLASTICA ALFA Multipex Air	TH 16*		570460	192,90
PEXTUBE PexTube	RFz 16*		571325	201,00	TH 20*			570470	192,90	
	RFz 20*		571330	201,00	TH 26*			570475	192,90	
	RFz 25		571337	222,00	TH 32			570480	192,90	
	RFz 32		571342	222,00	TH 16 S (PR-2B)**		Z8	574782 R	158,20	
	Pipelife C-PRESS	M 15		570110	159,90		TH 20 S (PR-2B)**	Z8	574788 R	158,20
		M 18		570120	159,90		TH 26 S (PR-2B)**	Z8	574794 R	158,20
		M 22		570130	159,90		TH 32 S (PR-2B)	Z8	574798 R	158,20
		M 28		570140	159,90	PLASTICA ALFA Multipexalfa Gas	TH 16*		570460	192,90
		M 35		570150	159,90		TH 20*		570470	192,90
		M 42 (PR-3S)	Z2	572706 R	696,00		TH 26*		570475	192,90
M 54 (PR-3S)		Z2	572708 R	696,00	TH 16 S (PR-2B)**		Z8	574782 R	158,20	
M 76,1 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00	TH 20 S (PR-2B)**		Z8	574788 R	158,20	
M 88,9 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00	TH 26 S (PR-2B)**		Z8	574794 R	158,20	
M 108,0 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00	PLASTICA ALFA Multipexalfa Gas protek		TH 16*		570460	192,90
M 15 S (PR-2B)		Z8	574738 R	131,20			TH 20*		570470	192,90
M 18 S (PR-2B)		Z8	574740 R	131,20		TH 26*		570475	192,90	
M 22 S (PR-2B)		Z8	574742 R	131,20		TH 16 S (PR-2B)**	Z8	574782 R	158,20	
M 28 S (PR-2B)	Z8	574744 R	131,20	TH 20 S (PR-2B)**		Z8	574788 R	158,20		
M 35 S (PR-2B)	Z8	574746 R	131,20	TH 26 S (PR-2B)**		Z8	574794 R	158,20		
Pipelife Edelstahl	M 15		570110	159,90		PLASTICA ALFA Multipex Plus	TH 16*		570460	192,90
	M 18		570120	159,90			TH 20*		570470	192,90
	M 22		570130	159,90	TH 26*			570475	192,90	
	M 28		570140	159,90	TH 32			570480	192,90	
	M 35		570150	159,90	TH 16 S (PR-2B)**		Z8	574782 R	158,20	
	M 42 (PR-3S)	Z2	572706 R	696,00	TH 20 S (PR-2B)**		Z8	574788 R	158,20	
	M 54 (PR-3S)	Z2	572708 R	696,00	TH 26 S (PR-2B)**		Z8	574794 R	158,20	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00	TH 32 S (PR-2B)		Z8	574798 R	158,20	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00	PLASTICA ALFA Multipex Thermo	TH 16*		570460	192,90	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00		TH 20*		570470	192,90	
	M 15 S (PR-2B)	Z8	574738 R	131,20		TH 26*		570475	192,90	
	M 18 S (PR-2B)	Z8	574740 R	131,20		TH 32		570480	192,90	
	M 22 S (PR-2B)	Z8	574742 R	131,20		TH 16 S (PR-2B)**	Z8	574782 R	158,20	
	M 28 S (PR-2B)	Z8	574744 R	131,20		TH 20 S (PR-2B)**	Z8	574788 R	158,20	
	M 35 S (PR-2B)	Z8	574746 R	131,20		TH 26 S (PR-2B)**	Z8	574794 R	158,20	
Pipelife RADOPRESS	TH 16*		570460	192,90	PLASTICA ALFA Multipex Thermo Plus	TH 16*		570460	192,90	
	TH 18*		570465	192,90		TH 20*		570470	192,90	
	TH 20*		570470	192,90		TH 26*		570475	192,90	
	TH 26*		570475	192,90		TH 32		570480	192,90	
	TH 32		570480	192,90		TH 16 S (PR-2B)**	Z8	574782 R	158,20	
	TH 40		570485	255,80		TH 20 S (PR-2B)**	Z8	574788 R	158,20	
	TH 50 (PZ-S)		572400	669,00		TH 26 S (PR-2B)**	Z8	574794 R	158,20	
	TH 63 (PZ-S)		572405	669,00		TH 32 S (PR-2B)	Z8	574798 R	158,20	
	TH 16 S (PR-2B)**	Z8	574782 R	158,20	PLASTICA ALFA Multipex Thermo Plus	TH 16*		570460	192,90	
	TH 18 S (PR-2B)**	Z8	574786 R	158,20		TH 20*		570470	192,90	
	TH 20 S (PR-2B)**	Z8	574788 R	158,20		TH 26*		570475	192,90	
	TH 26 S (PR-2B)**	Z8	574794 R	158,20		TH 32		570480	192,90	
	TH 32 S (PR-2B)	Z8	574798 R	158,20		TH 16 S (PR-2B)**	Z8	574782 R	158,20	
						TH 20 S (PR-2B)**	Z8	574788 R	158,20	
						TH 26 S (PR-2B)**	Z8	574794 R	158,20	
						TH 32 S (PR-2B)	Z8	574798 R	158,20	

REMS pressing tongs
REMS pressing rings

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
PLÁSTICOS FERRO FERROPLAST GPF MULT Pressfitting MULTICAPA	U 16*		570765	180,70
	U 20*		570775	180,70
	U 25*		570780	180,70
	U 32		570785	211,20
	U 16 S (PR-2B)**	Z8	574860 R	148,20
	U 20 S (PR-2B)**	Z8	574862 R	148,20
PLÁSTICOS FERRO FERROPLAST GPF PPSU Pressfitting PEX y MULTICAPA	U 25 S (PR-2B)**	Z8	574864 R	148,20
	U 32 S (PR-2B)	Z8	574868 R	173,20
	U 16*		570765	180,70
	U 20*		570775	180,70
	U 25*		570780	180,70
	U 32		570785	211,20
PLÁSTICOS FERRO FERROPLAST GPF PRESS Pressfitting PEX	U 16 S (PR-2B)**	Z8	574860 R	148,20
	U 20 S (PR-2B)**	Z8	574862 R	148,20
	U 25 S (PR-2B)**	Z8	574864 R	148,20
	U 32 S (PR-2B)	Z8	574868 R	173,20
	RFz 16*		571325	201,00
	RFz 20*		571330	201,00
PLUMBING PLUS EZIPEX Crimp (AUS)	RFz 25		571335	201,00
	RFz 32		571340	201,00
	K16/P18*		572600	201,00
	K/20*		572605	201,00
	K/25*		572610	201,00
	K32		572615	201,00
PLUMBING PLUS EZIPEX Gas (AUS)	K1/40		572620	201,00
	K1/50		572625	330,00
	K16/P18*		572600	201,00
	K/20*		572605	201,00
	K/25*		572610	201,00
	K32		572615	201,00
PLUMBING PLUS EZIPRESS Gas (AUS)	K1/40		572620	201,00
	K1/50		572625	330,00
	VAU 15 (OD 12,7 mm)		572687	164,90
	VAU 20 (OD 19,1 mm)		572689	164,90
	VAU 25 (OD 25,4 mm)		572691	164,90
	VAU 32 (OD 31,8 mm)		572693	174,00
PLUMBING PLUS EZIPRESS Solar (AUS)	VAU 40 (OD 38,1 mm)		572695	257,90
	VAU 50 (OD 50,8 mm)		572697	457,00
	VAUFz 65 (PR-3B) (OD 63,5 mm)	Z5	572839 R	641,00
	VAUFz 80 (PR-3B) (OD 76,2 mm)	Z5	572840 R	641,00
	VAUFz 100 (PR-3B) (OD 101,6 mm)	Z5	572841 R	680,00
	VAU 15 (OD 12,7 mm)		572687	164,90
PLUMBING PLUS EZIPRESS Water (AUS)	VAU 20 (OD 19,1 mm)		572689	164,90
	VAU 25 (OD 25,4 mm)		572691	164,90
	VAU 15 S (PR-2B) (OD 12,7 mm)	Z8	574804 R	135,30
	VAU 20 S (PR-2B)** (OD 19,1 mm)	Z8	574806 R	135,30
	VAU 25 S (PR-2B)** (OD 25,4 mm)	Z8	574808 R	135,30
	VAU 15 (OD 12,7 mm)		572687	164,90
POLYPIPE POLYSURE	VAU 20 (OD 19,1 mm)		572689	164,90
	VAU 25 (OD 25,4 mm)		572691	164,90
	VAU 32 (OD 31,8 mm)		572693	174,00
	VAU 40 (OD 38,1 mm)		572695	257,90
	VAU 50 (OD 50,8 mm)		572697	457,00
	VAUFz 65 (PR-3B) (OD 63,5 mm)	Z5	572839 R	641,00
POLYSAN Handelsges. m.b.H. & Co KG (Krems/Österreich)	VAUFz 80 (PR-3B) (OD 76,2 mm)	Z5	572840 R	641,00
	VAUFz 100 (PR-3B) (OD 101,6 mm)	Z5	572841 R	680,00
	VAU 15 S (PR-2B) (OD 12,7 mm)	Z8	574804 R	135,30
	VAU 20 S (PR-2B)** (OD 19,1 mm)	Z8	574806 R	135,30
	VAU 25 S (PR-2B)** (OD 25,4 mm)	Z8	574808 R	135,30
	TH 10*		570467	192,90
POLYSAN Handelsges. m.b.H. & Co KG (Krems/Österreich)	TH 15*		570457	192,90
	TH 22*		570472	192,90
	TH 28		570477	192,90
	M 15		570110	159,90
	M 18		570120	159,90
	M 22		570130	159,90
POLYSAN-Edelstahl Press-System M	M 28		570140	159,90
	M 35		570150	159,90
	M 42 (PR-3S)	Z2	572706 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
POLYSAN Handelsges. m.b.H. & Co KG (Krems/Österreich)	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
	M 15 S (PR-2B)	Z8	574738 R	131,20
	M 18 S (PR-2B)	Z8	574740 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20
POLYSAN Handelsges. m.b.H. & Co KG (Krems/Österreich)	M 15		570110	159,90
	M 18		570120	159,90
	M 22		570130	159,90
	M 28		570140	159,90
	M 35		570150	159,90
	M 42 (PR-3S)	Z2	572706 R	696,00
POLYSAN-Edelstahl Press-System 1.4520	M 54 (PR-3S)	Z2	572708 R	696,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
	M 15 S (PR-2B)	Z8	574738 R	131,20
	M 18 S (PR-2B)	Z8	574740 R	131,20
POLYSAN Handelsges. m.b.H. & Co KG (Krems/Österreich)	M 22 S (PR-2B)	Z8	574742 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20
	M 15		570110	159,90
	M 18		570120	159,90
	M 22		570130	159,90
POLYSAN Handelsges. m.b.H. & Co KG (Krems/Österreich)	M 28		570140	159,90
	M 35		570150	159,90
	M 42 (PR-3S)	Z2	572706 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
POLYSAN Handelsges. m.b.H. & Co KG (Krems/Österreich)	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
	M 15 S (PR-2B)	Z8	574738 R	131,20
	M 18 S (PR-2B)	Z8	574740 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
POLYSAN Handelsges. m.b.H. & Co KG (Krems/Österreich)	M 15		570110	159,90
	M 18		570120	159,90
	M 22		570130	159,90
	M 28		570140	159,90
	M 35		570150	159,90
	M 42 (PR-3S)	Z2	572706 R	696,00
POLYSAN-Edelstahl Press-System Gas	M 54 (PR-3S)	Z2	572708 R	696,00
	M 76,1 XL (PR-3S)	Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	M 88,9 G XL (PR-3S) ⁷⁾	Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
	M 108,0 G XL (PR-3S) ⁷⁾	Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
	M 15 S (PR-2B)	Z8	574738 R	131,20
	M 18 S (PR-2B)	Z8	574740 R	131,20
POLYSAN Handelsges. m.b.H. & Co KG (Krems/Österreich)	M 22 S (PR-2B)	Z8	574742 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20
	M 15		570110	159,90
	M 18		570120	159,90
	M 22		570130	159,90
POLYSAN-Edelstahl Press-System Wasser	M 28		570140	159,90
	M 35		570150	159,90
	M 42 (PR-3S)	Z2	572706 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
POLYSAN Handelsges. m.b.H. & Co KG (Krems/Österreich)	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
	M 15 S (PR-2B)	Z8	574738 R	131,20
	M 18 S (PR-2B)	Z8	574740 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20
POLYSAN Handelsges. m.b.H. & Co KG (Krems/Österreich)	TH 14*		570455	192,90
	TH 16*		570460	192,90
	TH 17*		570462	192,90
	TH 18*		570465	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
POLYSAN-Press-System	TH 32		570480	192,90
	TH 40		570485	255,80
	TH 50 (PZ-S)		572400	669,00
	TH 63 (PZ-S)		572405	669,00
	THz 75 (PR-3B)	Z4	572829 R	641,00
	TH 14 S (PR-2B)**	Z8	574778 R	158,20
POLYSAN Handelsges. m.b.H. & Co KG (Krems/Österreich)	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 17 S (PR-2B)**	Z8	574784 R	158,20
	TH 18 S (PR-2B)**	Z8	574786 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 32 S (PR-2B)**	Z8	574798 R	158,20
POLYSAN Handelsges. m.b.H. & Co KG (Krems/Österreich)	TH 14*		570455	192,90
	TH 16*		570460	192,90
	TH 17*		570462	192,90
	TH 18*		570465	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
POLYSAN-Henco-Press-System	HE 32		571900	230,50
	HEz 40		571904	334,00
	TH 14 S (PR-2B)**	Z8	574778 R	158,20
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 17 S (PR-2B)**	Z8	574784 R	158,20
	TH 18 S (PR-2B)**	Z8	574786 R	158,20
Prandelli Multyrama Pf	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	H 14*		570310	173,60
	H 16*		570320	173,60
	H 18*		570340	173,60
	H 20*		570350	173,60
Prandelli Multyrama Pfm	H 26*		570370	173,60
	H 32		570380	173,60
	U 40		570790	257,90
	U 50		570795	310,00
	U 63 (PR-3B)	Z4	572837 R	772,00
	H 16*		570320	173,60
POLYSAN Handelsges. m.b.H. & Co KG (Krems/Österreich)	H 18*		570340	173,60
	H 20*		570350	173,60
	H 26*		570370	173,60
	H 32		570380	173,60
	TH 16*		570460	192,90
	TH 18*		570465	192,90
POLYSAN Handelsges. m.b.H. & Co KG (Krems/Österreich)	TH 20*		570470	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	TH 40		570485	255,80
	TH 50 (PZ-S)		572400	669,00
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
POLYSAN Handelsges. m.b.H. & Co KG (Krems/Österreich)	TH 18 S (PR-2B)**	Z8	574786 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 32 S (PR-2B)**	Z8	574798 R	158,20
	U 16*		570765	180,70
	U 18*		570770	180,70
POLYSAN Handelsges. m.b.H. & Co KG (Krems/Österreich)	U 20*		570775	180,70
	U 40		570790	257,90
	U 50		570795	310,00
	U 63 (PR-3B)	Z4	572837 R	772,00
	U 16*		570765	180,70
	U 18*		570770	180,70

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
PURMO Cleverfit Radial	F 16*		570717	183,80	Raccorderie Metalliche MARINEPRES ¹⁾	M 15		570110	159,90
	F 20*		570727	183,80		M 18		570120	159,90
	F 26*		570730	199,00		M 22		570130	159,90
	F 32		570735	199,00		M 28		570140	159,90
	F 16 S (PR-2B)**	Z8	574728 R	150,80		M 35		570150	159,90
	F 20 S (PR-2B)**	Z8	574730 R	150,80		M 42 (PR-3S)	Z2	572706 R	696,00
	F 26 S (PR-2B)**	Z8	574732 R	163,20		M 54 (PR-3S)	Z2	572708 R	696,00
	F 32 S (PR-2B)**	Z8	574734 R	163,20		M 76,1 XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	H 16*		570320	173,60		M 88,9 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
	H 20*		570350	173,60		M 108,0 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
	H 26*		570370	173,60		M 15 S (PR-2B)	Z8	574738 R	131,20
	H 32		570380	173,60		M 18 S (PR-2B)	Z8	574740 R	131,20
	TH 14*		570455	192,90		M 22 S (PR-2B)	Z8	574742 R	131,20
	TH 16*		570460	192,90		M 28 S (PR-2B)	Z8	574744 R	131,20
	TH 17*		570462	192,90		M 35 S (PR-2B)	Z8	574746 R	131,20
	TH 20*		570470	192,90	Raccorderie Metalliche steelPRES ¹⁾	M 15		570110	159,90
	TH 26*		570475	192,90		M 18		570120	159,90
	TH 32		570480	192,90		M 22		570130	159,90
	TH 40		570485	255,80		M 28		570140	159,90
	TH 50 (PZ-S)		572400	669,00		M 35		570150	159,90
	TH 63 (PZ-S)		572405	669,00		M 42 (PR-3S)	Z2	572706 R	696,00
	TH 14 S (PR-2B)**	Z8	574778 R	158,20		M 54 (PR-3S)	Z2	572708 R	696,00
	TH 16 S (PR-2B)**	Z8	574782 R	158,20		M 76,1 XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	TH 17 S (PR-2B)**	Z8	574784 R	158,20		M 88,9 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
	TH 20 S (PR-2B)**	Z8	574788 R	158,20		M 108,0 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
	TH 26 S (PR-2B)**	Z8	574794 R	158,20		M 15 S (PR-2B)	Z8	574738 R	131,20
	TH 32 S (PR-2B)**	Z8	574798 R	158,20		M 18 S (PR-2B)	Z8	574740 R	131,20
	U 16*		570765	180,70		M 22 S (PR-2B)	Z8	574742 R	131,20
	U 20*		570775	180,70		M 28 S (PR-2B)	Z8	574744 R	131,20
	U 32		570785	211,20		M 35 S (PR-2B)	Z8	574746 R	131,20
	U 16 S (PR-2B)**	Z8	574860 R	148,20	RBM Tita-fix	B 14*		570845	210,20
	U 20 S (PR-2B)**	Z8	574862 R	148,20		B 16*		570850	210,20
	U 32 S (PR-2B)	Z8	574868 R	173,20		B 18*		570855	210,20
	VP 16*		570910	191,90		B 20*		570860	210,20
	VP 20*		570915	191,90		B 26		570870	232,50
	VP 32		570925	212,20		F 16*		570717	183,80
R				F 18*			570720	183,80	
				F 20*			570727	183,80	
				F 16 S (PR-2B)**		Z8	574728 R	150,80	
				F 20 S (PR-2B)**		Z8	574730 R	150,80	
				H 14*			570310	173,60	
Raccorderie Metalliche aesPRES ¹⁾	M 15		570110	159,90		H 16*		570320	173,60
	M 18		570120	159,90		H 18*		570340	173,60
	M 22		570130	159,90		H 20*		570350	173,60
	M 28		570140	159,90		H 26*		570370	173,60
	M 35		570150	159,90	H 32		570380	173,60	
	M 42 (PR-3S)	Z2	572706 R	696,00	TH 14*		570455	192,90	
	M 54 (PR-3S)	Z2	572708 R	696,00	TH 16*		570460	192,90	
	M 15 S (PR-2B)	Z8	574738 R	131,20	TH 18*		570465	192,90	
	M 18 S (PR-2B)	Z8	574740 R	131,20	TH 20*		570470	192,90	
	M 22 S (PR-2B)	Z8	574742 R	131,20	TH 26*		570475	192,90	
	M 28 S (PR-2B)	Z8	574744 R	131,20	TH 32		570480	192,90	
	M 35 S (PR-2B)	Z8	574746 R	131,20	TH 40		570485	255,80	
Raccorderie Metalliche inoxPRES ¹⁾	M 15		570110	159,90	TH 50 (PZ-S)		572400	669,00	
	M 18		570120	159,90	TH 63 (PZ-S)		572405	669,00	
	M 22		570130	159,90	TH 16 S (PR-2B)**	Z8	574782 R	158,20	
	M 28		570140	159,90	TH 20 S (PR-2B)**	Z8	574788 R	158,20	
	M 35		570150	159,90	TH 26 S (PR-2B)**	Z8	574794 R	158,20	
	M 42 (PR-3S)	Z2	572706 R	696,00	TH 32 S (PR-2B)**	Z8	574798 R	158,20	
	M 54 (PR-3S)	Z2	572708 R	696,00	U 14*		570760	180,70	
	M 76,1 XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579101 R	1.213,00	U 16*		570765	180,70	
	M 88,9 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579110 R	1.416,00	U 18*		570770	180,70	
	M 108,0 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579111 R	1.416,00	U 20*		570775	180,70	
	M 15 S (PR-2B)	Z8	574738 R	131,20	RBM Tita-gas	TH 16*		570460	192,90
	M 18 S (PR-2B)	Z8	574740 R	131,20		TH 20*		570470	192,90
	M 22 S (PR-2B)	Z8	574742 R	131,20		TH 26*		570475	192,90
	M 28 S (PR-2B)	Z8	574744 R	131,20		TH 32		570480	192,90
	M 35 S (PR-2B)	Z8	574746 R	131,20		TH 16 S (PR-2B)**	Z8	574782 R	158,20
						TH 20 S (PR-2B)**	Z8	574788 R	158,20
						TH 26 S (PR-2B)**	Z8	574794 R	158,20
						TH 32 S (PR-2B)	Z8	574798 R	158,20

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 227. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 227. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 230.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 238.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

¹³⁾ Only pressing tongs/S pressing rings (PR-2B) from designation "125" (1st quarter of 2025), "225" (2nd quarter of 2025) etc. can be used.
The designation is stamped on every pressing jaw.

The suitability of REMS pressing tools for pressfitting systems: Date 13.10.2025. For the updated situation regarding suitability status check our website:
www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 288 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
Redi NicolI Fluxo	TH 16*		570460	192,90
	TH 18*		570465	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	TH 40		570485	255,80
	TH 50 (PZ-S)		572400	669,00
	TH 63 (PZ-S)		572405	669,00
	THz 75 (PR-3B)	Z4	572829 R	641,00
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 32 S (PR-2B)	Z8	574798 R	158,20
Redi NicolI Fluxo Gas	TH 16*		570460	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
RIFENG U PRESS FITTING (F5)	U 14*		570760	180,70
	U 16*		570765	180,70
	U 18*		570770	180,70
	U 20*		570775	180,70
	U 25*		570780	180,70
	U 32		570785	211,20
	U 40		570790	257,90
	U 50		570795	310,00
	U 63 (PZ-S)		572365	669,00
	U 63 (PR-3B)	Z4	572837 R	772,00
	U 75 (PR-3B)	Z4	572828 R	680,00
RIFENG TH PRESS FITTING (F9)	TH 16*		570460	192,90
	TH 20*		570470	192,90
	TH 25*		570495	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	TH 40		570485	255,80
	TH 50 (PZ-S)		572400	669,00
	TH 63 (PZ-S)		572405	669,00
RIQUIER A SERTIR	Rfz 12*		571320	201,00
	Rfz 16*		571325	201,00
	Rfz 20*		571330	201,00
	Rfz 25		571335	201,00
RIQUIER Système multicouche	TH 16*		570460	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	TH 40		570485	255,80
	TH 50 (PZ-S)		572400	669,00
	TH 63 (PZ-S)		572405	669,00
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 32 S (PR-2B)	Z8	574798 R	158,20
	U 16*		570765	180,70
	U 20*		570775	180,70
	U 32		570785	211,20
	U 40		570790	257,90
	U 50		570795	310,00
RLS RAPID LOCKING SYSTEM	RLS ¼" S (PR-2B)	Z8	574828 R	156,60
	RLS ¾" S (PR-2B)	Z8	574832 R	156,60
	RLS ½" S (PR-2B)	Z8	574834 R	156,60
	RLS ¾" S (PR-2B)	Z8	574836 R	156,60
	RLS ¾" S (PR-2B)	Z8	574838 R	156,60
	RLS ¾" S (PR-2B)	Z8	574840 R	156,60
Roth PressCheck	RN 14*		572672	180,70
	RN 16		572670	180,70
	RN 17*		572674	180,70
	RN 20*		572676	180,70
	RN 25/26		572678	180,70
	RN 32		572680	211,20
	RN 40 (PR-3S)	Z2	572714 R	696,00
	RN 50 (PR-3S)	Z2	572716 R	696,00
	RNz 63 (PR-3B)	Z4	572836 R	772,00
Rubinetterie Bresciane Bonomi FRABOPRESS 316 GAS M	M 15		570110	159,90
	M 18		570120	159,90
	M 22		570130	159,90
	M 28		570140	159,90
	M 35		570150	159,90
	M 42 (PR-3S)	Z2	572706 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00
	M 15 S (PR-2B)	Z8	574738 R	131,20
	M 18 S (PR-2B)	Z1	574740 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20
Rubinetterie Bresciane Bonomi FRABOPRESS 316 GAS V	V 15		570115	159,90
	V 18		570125	159,90
	V 22		570135	159,90
	V 28		570145	159,90
	V 35		570155	159,90
	V 42		570165	373,00
	V 54		570175	383,00
	V 42 (PR-2B)	Z2	572850 R	334,00
	V 54 (PR-2B)	Z2	572851 R	361,00
	V 15 S (PR-2B)	Z8	574752 R	131,20
	V 18 S (PR-2B)	Z8	574756 R	131,20
	V 22 S (PR-2B)	Z8	574758 R	131,20
	V 28 S (PR-2B)	Z8	574760 R	131,20
	V 35 S (PR-2B)	Z8	574762 R	131,20

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
Rubinetterie Bresciane Bonomi FRABOPRESS 316 M	M 15		570110	159,90
	M 18		570120	159,90
	M 22		570130	159,90
	M 28		570140	159,90
	M 35		570150	159,90
	M 42 (PR-3S)	Z2	572706 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00
	M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107 R	1.213,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
	M 15 S (PR-2B)	Z8	574738 R	131,20
	M 18 S (PR-2B)	Z8	574740 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20
Rubinetterie Bresciane Bonomi FRABOPRESS 316 V	V 15		570115	159,90
	V 18		570125	159,90
	V 22		570135	159,90
	V 28		570145	159,90
	V 35		570155	159,90
	V 42		570165	373,00
	V 54		570175	383,00
	V 42 (PR-2B)	Z2	572850 R	334,00
	V 54 (PR-2B)	Z2	572851 R	361,00
	V 15 S (PR-2B)	Z8	574752 R	131,20
	V 18 S (PR-2B)	Z8	574756 R	131,20
	V 22 S (PR-2B)	Z8	574758 R	131,20
Rubinetterie Bresciane Bonomi FRABOPRESS CHROME	V 28 S (PR-2B)	Z8	574760 R	131,20
	V 35 S (PR-2B)	Z8	574762 R	131,20
	V 12		570107	159,90
	V 15		570115	159,90
	V 18		570125	159,90
	V 22		570135	159,90
	V 12 S (PR-2B)	Z8	574748 R	131,20
	V 15 S (PR-2B)	Z8	574752 R	131,20
	V 18 S (PR-2B)	Z8	574756 R	131,20
	V 22 S (PR-2B)	Z8	574758 R	131,20
Rubinetterie Bresciane Bonomi FRABOPRESS C-STEEL M	M 15		570110	159,90
	M 18		570120	159,90
	M 22		570130	159,90
	M 28		570140	159,90
	M 35		570150	159,90
	M 42 (PR-3S)	Z2	572706 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00
	M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107 R	1.213,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
	M 15 S (PR-2B)	Z8	574738 R	131,20
Rubinetterie Bresciane Bonomi FRABOPRESS C-STEEL V	M 18 S (PR-2B)	Z8	574740 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20
	V 12		570107	159,90
	V 15		570115	159,90
	V 18		570125	159,90
	V 22		570135	159,90
	V 28		570145	159,90
	V 35		570155	159,90
	V 42		570165	373,00
	V 54		570175	383,00
Bresciane Bonomi FRABOPRESS GAS M	V 42 (PR-2B)	Z2	572850 R	334,00
	V 54 (PR-2B)	Z2	572851 R	361,00
	V 12 S (PR-2B)	Z8	574748 R	131,20
	V 15 S (PR-2B)	Z8	574752 R	131,20
	V 18 S (PR-2B)	Z8	574756 R	131,20
	V 22 S (PR-2B)	Z8	574758 R	131,20
	V 28 S (PR-2B)	Z8	574760 R	131,20
	V 35 S (PR-2B)	Z8	574762 R	131,20
	M 18		570120	159,90
	M 22		570130	159,90
	M 28		570140	159,90
	M 35		570150	159,90
Rubinetterie Bresciane Bonomi FRABOPRESS GAS V	M 42 (PR-3S)	Z2	572706 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00
	M 15 S (PR-2B)	Z8	574738 R	131,20
	M 18 S (PR-2B)	Z8	574740 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20
	V 15		570115	159,90
	V 18		570125	159,90
	V 22		570135	159,90
	V 28		570145	159,90
	V 35		570155	159,90
	V 42		570165	373,00
	V 54		570175	383,00
	V 42 (PR-2B)	Z2	572850 R	334,00
	V 54 (PR-2B)	Z2	572851 R	361,00
	V 15 S (PR-2B)	Z8	574752 R	131,20
	V 18 S (PR-2B)	Z8	574756 R	131,20
FRABOPRESS GAS V	V 22 S (PR-2B)	Z8	574758 R	131,20
	V 28 S (PR-2B)	Z8	574760 R	131,20
	V 35 S (PR-2B)	Z8	574762 R	131,20

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
Rubinetterie	M 12		570100	159,90	Rubinetterie	B 14*		570845	210,20
Bresciane Bonomi	M 15		570110	159,90	Bresciane	B 16*		570850	210,20
FRABOPRESS M	M 18		570120	159,90	Bonomi	B 18*		570855	210,20
	M 22		570130	159,90	TURBO PRESS	B 20*		570860	210,20
	M 28		570140	159,90		B 26		570870	232,50
	M 35		570150	159,90		B 32		570880	232,50
	M 42 (PR-3S)	Z2	572706 R	696,00		H 14*		570310	173,60
	M 54 (PR-3S)	Z2	572708 R	696,00		H 16*		570320	173,60
	M 66,7 XL (PR-3S)	Z6 XL ¹³⁾ / Z7 XL 45 kN ⁴⁾	579107 R	1.213,00		H 18*		570340	173,60
	M 76,1 XL (PR-3S)	Z6 XL ¹³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00		H 20*		570350	173,60
	M 88,9 G XL (PR-3S)	Z6 XL ¹³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00		H 26*		570370	173,60
	M 108,0 G XL (PR-3S)	Z6 XL ¹³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00		H 32		570380	173,60
	M 12 S (PR-2B)	Z8	574736 R	131,20		TH 14*		570455	192,90
	M 15 S (PR-2B)	Z8	574738 R	131,20		TH 16*		570460	192,90
	M 18 S (PR-2B)	Z8	574740 R	131,20		TH 18*		570465	192,90
	M 22 S (PR-2B)	Z8	574742 R	131,20		TH 20*		570470	192,90
	M 28 S (PR-2B)	Z8	574744 R	131,20		TH 26*		570475	192,90
	M 35 S (PR-2B)	Z8	574746 R	131,20		TH 32		570480	192,90
						TH 40		570485	255,80
Rubinetterie	V 15		570115	159,90		TH 50 (PZ-S)		572400	669,00
Bresciane Bonomi	V 18		570125	159,90		TH 63 (PZ-S)		572405	669,00
FRABOPRESS	V 22		570135	159,90		TH 14 S (PR-2B)**	Z8	574778 R	158,20
SOLAR	V 28		570145	159,90		TH 16 S (PR-2B)**	Z8	574782 R	158,20
	V 35		570155	159,90		TH 18 S (PR-2B)**	Z8	574786 R	158,20
	V 15 S (PR-2B)	Z8	574752 R	131,20		TH 20 S (PR-2B)**	Z8	574788 R	158,20
	V 18 S (PR-2B)	Z8	574756 R	131,20		TH 26 S (PR-2B)**	Z8	574794 R	158,20
	V 22 S (PR-2B)	Z8	574758 R	131,20		TH 32 S (PR-2B)	Z8	574798 R	158,20
	V 28 S (PR-2B)	Z8	574760 R	131,20		U 14*		570760	180,70
	V 35 S (PR-2B)	Z8	574762 R	131,20		U 16*		570765	180,70
						U 18*		570770	180,70
Rubinetterie	V 12		570107	159,90		U 20*		570775	180,70
Bresciane Bonomi	V 15		570115	159,90		U 26* ¹²⁾		570750	211,20
FRABOPRESS V	V 18		570125	159,90		U 32		570785	211,20
	V 22		570135	159,90		U 14 S (PR-2B)**	Z8	574858 R	148,20
	V 28		570145	159,90		U 16 S (PR-2B)**	Z8	574860 R	148,20
	V 35		570155	159,90		U 18 S (PR-2B)**	Z8	574870 R	148,20
	V 42		570165	373,00		U 20 S (PR-2B)**	Z8	574862 R	148,20
	V 54		570175	383,00		U 26 S (PR-2B)**	Z8	574866 R	173,20
	V 42 (PR-2B)	Z2	572850 R	334,00		U 32 S (PR-2B)	Z8	574868 R	173,20
	V 54 (PR-2B)	Z2	572851 R	361,00	Rubinetterie	TH 16*		570460	192,90
	V 12 S (PR-2B)	Z8	574748 R	131,20	Bresciane	TH 20*		570470	192,90
	V 15 S (PR-2B)	Z8	574752 R	131,20	Bonomi	TH 26*		570475	192,90
	V 18 S (PR-2B)	Z8	574756 R	131,20	TURBO PRESS	TH 32		570480	192,90
	V 22 S (PR-2B)	Z8	574758 R	131,20	GAS	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	V 28 S (PR-2B)	Z8	574760 R	131,20		TH 20 S (PR-2B)**	Z8	574788 R	158,20
	V 35 S (PR-2B)	Z8	574762 R	131,20		TH 26 S (PR-2B)**	Z8	574794 R	158,20
						TH 32 S (PR-2B)	Z8	574798 R	158,20
Rubinetterie	M 15		570110	159,90	S				
Bresciane	M 18		570120	159,90	SA.MI PLASTIC	TH 14*		570455	192,90
Bonomi	M 22		570130	159,90		TH 16*		570460	192,90
TURBO CuNi	M 28		570140	159,90		TH 18*		570465	192,90
	M 35		570150	159,90		TH 20*		570470	192,90
	M 42 (PR-3S)	Z2	572706 R	696,00		TH 26*		570475	192,90
	M 54 (PR-3S)	Z2	572708 R	696,00		TH 32		570480	192,90
	M 76,1 XL (PR-3S)	Z6 XL ¹³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00		TH 40		570485	255,80
	M 88,9 G XL (PR-3S)	Z6 XL ¹³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00		TH 50 (PZ-S)		572400	669,00
	M 108,0 G XL (PR-3S)	Z6 XL ¹³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00		TH 63 (PZ-S)		572405	669,00
	M 15 S (PR-2B)	Z8	574738 R	131,20		TH 14 S (PR-2B)**	Z8	574778 R	158,20
	M 18 S (PR-2B)	Z8	574740 R	131,20		TH 16 S (PR-2B)**	Z8	574782 R	158,20
	M 22 S (PR-2B)	Z8	574742 R	131,20		TH 18 S (PR-2B)**	Z8	574786 R	158,20
	M 28 S (PR-2B)	Z8	574744 R	131,20		TH 20 S (PR-2B)**	Z8	574788 R	158,20
	M 35 S (PR-2B)	Z8	574746 R	131,20		TH 26 S (PR-2B)**	Z8	574794 R	158,20
						TH 32 S (PR-2B)**	Z8	574798 R	158,20

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 227. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 227. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 230.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC, see page 238.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

¹³⁾ Only pressing tongs/S pressing rings (PR-2B) from designation "125" (1st quarter of 2025), "225" (2nd quarter of 2025) etc. can be used. The designation is stamped on every pressing jaw.

The suitability of REMS pressing tools for pressfitting systems: Date 13.10.2025. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 288 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
SA.MI PLASTIC Multistrato Gas	TH 16*		570460	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 32 S (PR-2B)	Z8	574798 R	158,20
SANHA	B 16*		570850	210,20
3fit-Press Pb-free Serie 25000	B 20*		570860	210,20
	B 26		570870	232,50
	B 32		570880	232,50
	F 16*		570717	183,80
	F 20*		570727	183,80
	F 26*		570730	199,00
	F 32		570735	199,00
	Fz 40		570742	212,20
	Fz 50		570747	322,00
	F 63 (PZ-S)		572385	669,00
	F 16 S (PR-2B)**	Z8	574728 R	150,80
	F 20 S (PR-2B)**	Z8	574730 R	150,80
	F 26 S (PR-2B)**	Z8	574732 R	163,20
	F 32 S (PR-2B)	Z8	574734 R	163,20
	H 16*		570320	173,60
	H 20*		570350	173,60
	H 26*		570370	173,60
	H 32		570380	173,60
	H 40 (PZ-4G)		570390	586,00
	TH 16*		570460	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	TH 40		570485	255,80
	TH 50 (PZ-S)		572400	669,00
	TH 63 (PZ-S)		572405	669,00
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 32 S (PR-2B)	Z8	574798 R	158,20
	U 16*		570765	180,70
	U 20*		570775	180,70
	U 26* ¹²⁾		570750	211,20
	U 32		570785	211,20
	U 40		570790	257,90
	U 50		570795	310,00
	U 63 (PR-3B)	Z4	572837 R	772,00
	U 63 (PZ-S)		572365	669,00
SANHA 3fit-Press PPSU Serie 35000	B 16*		570850	210,20
	B 20*		570860	210,20
	B 26		570870	232,50
	B 32		570880	232,50
	F 16*		570717	183,80
	F 20*		570727	183,80
	F 26*		570730	199,00
	F 32		570735	199,00
	F 16 S (PR-2B)**	Z8	574728 R	150,80
	F 20 S (PR-2B)**	Z8	574730 R	150,80
	F 26 S (PR-2B)**	Z8	574732 R	163,20
	F 32 S (PR-2B)	Z8	574734 R	163,20
	H 16*		570320	173,60
	H 20*		570350	173,60
	H 26*		570370	173,60
	H 32		570380	173,60
	TH 16*		570460	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	TH 40		570485	255,80
	TH 50 (PZ-S)		572400	669,00
	TH 63 (PZ-S)		572405	669,00
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 32 S (PR-2B)	Z8	574798 R	158,20
	U 16*		570765	180,70
	U 20*		570775	180,70
	U 26* ¹²⁾		570750	211,20
	U 32		570785	211,20

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
SANHA Heavy Steel Press	VMP ½" G (ØD 21,3 mm)		571766 R	222,30
	VMPz ¾" (ØD 26,9 mm)		571764	222,30
	VMPz 1" (ØD 33,7 mm)		571767	222,30
	VMPz 1¼" (PZ-S) (ØD 42,4 mm)		572413	730,00
	VMPz 1½" (PR-3B) (ØD 48,3 mm)	Z5	572844 R	505,00
	VMPz 2" (PR-3B) (ØD 60,3 mm)	Z5	572845 R	505,00
SANHA Heavy Steel Press Gas ⁹⁾	VMP ½" G (ØD 21,3 mm) ¹¹⁾		571766 R	222,30
	VMPz ¾" (ØD 26,9 mm)		571764	222,30
	VMPz 1" (ØD 33,7 mm)		571767	222,30
	VMPz 1¼" (PZ-S) (ØD 42,4 mm)		572413	730,00
	VMPz 1½" (PR-3B) (ØD 48,3 mm)	Z5	572844 R	505,00
	VMPz 2" (PR-3B) (ØD 60,3 mm)	Z5	572845 R	505,00
SANHA-NiroSan Gas Presssystem Serie 17000	SA 15		570935	192,00
	SA 18		570940	192,00
	SA 22		570945	192,00
	SA 28		570950	192,00
	SA 35		570955	192,00
	M 15		570110	159,90
	M 18		570120	159,90
	M 22		570130	159,90
	M 28		570140	159,90
	M 35		570150	159,90
	M 42 (PR-3S)	Z2	572706 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00
	M 76,1 XL (PR-3S)	Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	M 88,9 G XL (PR-3S) ⁷⁾	Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
	M 108,0 G XL (PR-3S) ⁷⁾	Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
	M 15 S (PR-2B)	Z8	574738 R	131,20
	M 18 S (PR-2B)	Z8	574740 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20
	V 15		570115	159,90
	V 18		570125	159,90
	V 22		570135	159,90
	V 28		570145	159,90
	V 35		570155	159,90
	V 42		570165	373,00
	V 42 (PR-2B)	Z2	572850 R	334,00
	V 54		570175	383,00
	V 54 (PR-2B)	Z2	572851 R	361,00
	V 15 S (PR-2B)	Z8	574752 R	131,20
	V 18 S (PR-2B)	Z8	574756 R	131,20
	V 22 S (PR-2B)	Z8	574758 R	131,20
	V 28 S (PR-2B)	Z8	574760 R	131,20
	V 35 S (PR-2B)	Z8	574762 R	131,20
SANHA-NiroSan Industry Presssystem Serie 18000	SA 15		570935	192,00
	SA 18		570940	192,00
	SA 22		570945	192,00
	SA 28		570950	192,00
	SA 35		570955	192,00
	M 15		570110	159,90
	M 18		570120	159,90
	M 22		570130	159,90
	M 28		570140	159,90
	M 35		570150	159,90
	M 42 (PR-3S)	Z2	572706 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00
	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100 R	1.107,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
	M 15 S (PR-2B)	Z8	574738 R	131,20
	M 18 S (PR-2B)	Z8	574740 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20
	V 15		570115	159,90
	V 18		570125	159,90
	V 22		570135	159,90
	V 28		570145	159,90
	V 35		570155	159,90
	V 42		570165	373,00
	V 42 (PR-2B)	Z2	572850 R	334,00
	V 54		570175	383,00
	V 54 (PR-2B)	Z2	572851 R	361,00
	V 15 S (PR-2B)	Z8	574752 R	131,20
	V 18 S (PR-2B)	Z8	574756 R	131,20
	V 22 S (PR-2B)	Z8	574758 R	131,20
	V 28 S (PR-2B)	Z8	574760 R	131,20
	V 35 S (PR-2B)	Z8	574762 R	131,20

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
SANHA-NiroSan- Presssystem Serie 9000	SA 15		570935	192,00	SANHA NiroTherm Serie 91000	SA 15		570935	192,00
	SA 18		570940	192,00		SA 18		570940	192,00
	SA 22		570945	192,00		SA 22		570945	192,00
	SA 28		570950	192,00		SA 28		570950	192,00
	SA 35		570955	192,00		SA 35		570955	192,00
	M 15		570110	159,90		M 15		570110	159,90
	M 18		570120	159,90		M 18		570120	159,90
	M 22		570130	159,90		M 22		570130	159,90
	M 28		570140	159,90		M 28		570140	159,90
	M 35		570150	159,90		M 35		570150	159,90
	M 42 (PR-3S)	Z2	572706 R	696,00		M 42 (PR-3S)	Z2	572706 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00		M 54 (PR-3S)	Z2	572708 R	696,00
	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100 R	1.107,00		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00		M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00		M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00		M 15 S (PR-2B)	Z8	574738 R	131,20
	M 15 S (PR-2B)	Z8	574738 R	131,20		M 18 S (PR-2B)	Z8	574740 R	131,20
	M 18 S (PR-2B)	Z8	574740 R	131,20		M 22 S (PR-2B)	Z8	574742 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20		M 28 S (PR-2B)	Z8	574744 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20		M 35 S (PR-2B)	Z8	574746 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20		V 15		570115	159,90
	V 15		570115	159,90		V 18		570125	159,90
	V 18		570125	159,90		V 22		570135	159,90
	V 22		570135	159,90		V 28		570145	159,90
	V 28		570145	159,90		V 35		570155	159,90
	V 35		570155	159,90		V 42		570165	373,00
	V 42		570165	373,00		V 42 (PR-2B)	Z2	572850 R	334,00
	V 42 (PR-2B)	Z2	572850 R	334,00		V 54		570175	383,00
	V 54		570175	383,00		V 54 (PR-2B)	Z2	572851 R	361,00
	V 54 (PR-2B)	Z2	572851 R	361,00		V 15 S (PR-2B)	Z8	574752 R	131,20
	V 15 S (PR-2B)	Z8	574752 R	131,20		V 18 S (PR-2B)	Z8	574756 R	131,20
	V 18 S (PR-2B)	Z8	574756 R	131,20		V 22 S (PR-2B)	Z8	574758 R	131,20
	V 22 S (PR-2B)	Z8	574758 R	131,20		V 28 S (PR-2B)	Z8	574760 R	131,20
	V 28 S (PR-2B)	Z8	574760 R	131,20		V 35 S (PR-2B)	Z8	574762 R	131,20
	V 35 S (PR-2B)	Z8	574762 R	131,20	SANHA NiroTherm Industry Serie 98000	SA 15		570935	192,00
SANHA-NiroSan SF Presssystem Serie 19000 (silicone free)	SA 15		570935	192,00		SA 18		570940	192,00
	SA 18		570940	192,00		SA 22		570945	192,00
	SA 22		570945	192,00		SA 28		570950	192,00
	SA 28		570950	192,00		SA 35		570955	192,00
	SA 35		570955	192,00		M 15		570110	159,90
	M 15		570110	159,90		M 18		570120	159,90
	M 18		570120	159,90		M 22		570130	159,90
	M 22		570130	159,90		M 28		570140	159,90
	M 28		570140	159,90		M 35		570150	159,90
	M 35		570150	159,90		M 42 (PR-3S)	Z2	572706 R	696,00
	M 42 (PR-3S)	Z2	572706 R	696,00		M 54 (PR-3S)	Z2	572708 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00		M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00		M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00		M 15 S (PR-2B)	Z8	574738 R	131,20
	M 15 S (PR-2B)	Z8	574738 R	131,20		M 18 S (PR-2B)	Z8	574740 R	131,20
	M 18 S (PR-2B)	Z8	574740 R	131,20		M 22 S (PR-2B)	Z8	574742 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20		M 28 S (PR-2B)	Z8	574744 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20		M 35 S (PR-2B)	Z8	574746 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20		V 15		570115	159,90
	V 15		570115	159,90		V 18		570125	159,90
	V 18		570125	159,90		V 22		570135	159,90
	V 22		570135	159,90		V 28		570145	159,90
	V 28		570145	159,90		V 35		570155	159,90
	V 35		570155	159,90		V 42		570165	373,00
	V 42		570165	373,00		V 42 (PR-2B)	Z2	572850 R	334,00
	V 42 (PR-2B)	Z2	572850 R	334,00		V 54		570175	383,00
	V 54		570175	383,00		V 54 (PR-2B)	Z2	572851 R	361,00
	V 54 (PR-2B)	Z2	572851 R	361,00		V 15 S (PR-2B)	Z8	574752 R	131,20
	V 15 S (PR-2B)	Z8	574752 R	131,20		V 18 S (PR-2B)	Z8	574756 R	131,20
	V 18 S (PR-2B)	Z8	574756 R	131,20		V 22 S (PR-2B)	Z8	574758 R	131,20
	V 22 S (PR-2B)	Z8	574758 R	131,20		V 28 S (PR-2B)	Z8	574760 R	131,20
	V 28 S (PR-2B)	Z8	574760 R	131,20		V 35 S (PR-2B)	Z8	574762 R	131,20
	V 35 S (PR-2B)	Z8	574762 R	131,20					

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 227. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 227. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 230.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC, see page 238.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

¹³⁾ Only pressing tongs/S pressing rings (PR-2B) from designation "125" (1st quarter of 2025), "225" (2nd quarter of 2025) etc. can be used.
The designation is stamped on every pressing jaw.

The suitability of REMS pressing tools for pressfitting systems: Date 13.10.2025. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 288 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
SANHA-Press Chrom Serie 16000	SA 12		570930	279,20
	SA 15		570935	192,00
	SA 18		570940	192,00
	SA 22		570945	192,00
	SA 28		570950	192,00
	M 12		570100	159,90
	M 15		570110	159,90
	M 18		570120	159,90
	M 22		570130	159,90
	M 28		570140	159,90
	M 12 S (PR-2B)	Z8	574736 R	131,20
	M 15 S (PR-2B)	Z8	574738 R	131,20
	M 18 S (PR-2B)	Z8	574740 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20
	V 12		570107	159,90
	V 15		570115	159,90
	V 18		570125	159,90
	V 22		570135	159,90
	V 28		570145	159,90
	V 12 S (PR-2B)	Z8	574748 R	131,20
	V 15 S (PR-2B)	Z8	574752 R	131,20
	V 18 S (PR-2B)	Z8	574756 R	131,20
	V 22 S (PR-2B)	Z8	574758 R	131,20
	V 28 S (PR-2B)	Z8	574760 R	131,20
SANHA-Press GAS Pressfittings Serie 10000/ Serie 11000	SA 12		570930	279,20
	SA 14		570932	279,20
	SA 15		570935	192,00
	SA 16		570937	192,00
	SA 18		570940	192,00
	SA 22		570945	192,00
	SA 28		570950	192,00
	SA 35		570955	192,00
	M 12		570100	159,90
	M 15		570110	159,90
	M 18		570120	159,90
	M 22		570130	159,90
	M 28		570140	159,90
	M 35		570150	159,90
	M 42 (PR-3S)	Z2	572706 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00
	M 12 S (PR-2B)	Z8	574736 R	131,20
	M 15 S (PR-2B)	Z8	574738 R	131,20
	M 18 S (PR-2B)	Z8	574740 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20
	V 12		570107	159,90
	V 14		570132	159,90
	V 15		570115	159,90
	V 16		570137	159,90
	V 18		570125	159,90
	V 22		570135	159,90
	V 28		570145	159,90
	V 35		570155	159,90
	V 42		570165	373,00
	V 42 (PR-2B)	Z2	572850 R	334,00
	V 54		570175	383,00
	V 54 (PR-2B)	Z2	572851 R	361,00
	V 12 S (PR-2B)	Z8	574748 R	131,20
	V 14 S (PR-2B)	Z8	574750 R	131,20
	V 15 S (PR-2B)	Z8	574752 R	131,20
	V 16 S (PR-2B)	Z8	574754 R	131,20
	V 18 S (PR-2B)	Z8	574756 R	131,20
	V 22 S (PR-2B)	Z8	574758 R	131,20
	V 28 S (PR-2B)	Z8	574760 R	131,20
	V 35 S (PR-2B)	Z8	574762 R	131,20
SANHA-Press Pressfittings Serie 6000	SA 12		570930	279,20
	SA 14		570932	279,20
	SA 15		570935	192,00
	SA 16		570937	192,00
	SA 18		570940	192,00
	SA 22		570945	192,00
	SA 28		570950	192,00
	SA 35		570955	192,00
	M 12		570100	159,90
	M 15		570110	159,90
	M 18		570120	159,90
	M 22		570130	159,90
	M 28		570140	159,90
	M 35		570150	159,90
	M 42 (PR-3S)	Z2	572706 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00
	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100 R	1.107,00
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108 R	1.213,00
	M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107 R	1.213,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
	M 12 S (PR-2B)	Z8	574736 R	131,20
	M 15 S (PR-2B)	Z8	574738 R	131,20
	M 18 S (PR-2B)	Z8	574740 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20
	V 12		570107	159,90
	V 14		570132	159,90
	V 15		570115	159,90
	V 16		570137	159,90
	V 18		570125	159,90
	V 22		570135	159,90
	V 28		570145	159,90
	V 35		570155	159,90
	V 42		570165	373,00
	V 42 (PR-2B)	Z2	572850 R	334,00
	V 54		570175	383,00
	V 54 (PR-2B)	Z2	572851 R	361,00
	V 12 S (PR-2B)	Z8	574748 R	131,20
	V 14 S (PR-2B)	Z8	574750 R	131,20
	V 15 S (PR-2B)	Z8	574752 R	131,20
	V 16 S (PR-2B)	Z8	574754 R	131,20
	V 18 S (PR-2B)	Z8	574756 R	131,20
	V 22 S (PR-2B)	Z8	574758 R	131,20
	V 28 S (PR-2B)	Z8	574760 R	131,20
	V 35 S (PR-2B)	Z8	574762 R	131,20

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
SANHA-Press SOLAR Pressfittings Serie 12000/ Serie 13000	SA 12		570930	279,20
	SA 15		570935	192,00
	SA 18		570940	192,00
	SA 22		570945	192,00
	SA 28		570950	192,00
	SA 35		570955	192,00
	M 12		570100	159,90
	M 15		570110	159,90
	M 18		570120	159,90
	M 22		570130	159,90
	M 28		570140	159,90
	M 35		570150	159,90
	M 42 (PR-3S)	Z2	572706 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00
	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100 R	1.107,00
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108 R	1.213,00
	M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107 R	1.213,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
	M 12 S (PR-2B)	Z8	574736 R	131,20
	M 15 S (PR-2B)	Z8	574738 R	131,20
	M 18 S (PR-2B)	Z8	574740 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20
	V 12		570107	159,90
	V 15		570115	159,90
	V 18		570125	159,90
	V 22		570135	159,90
SANHA PURAPRESS Serie 8000	SA 12		570930	279,20
	SA 14		570932	279,20
	SA 15		570935	192,00
	SA 16		570937	192,00
	SA 18		570940	192,00
	SA 22		570945	192,00
	SA 28		570950	192,00
	SA 35		570955	192,00
	M 12		570100	159,90
	M 15 ¹⁾		570110	159,90
	M 18 ¹⁾		570120	159,90
	M 22 ¹⁾		570130	159,90
	M 28 ¹⁾		570140	159,90
	M 35 ¹⁾		570150	159,90
	M 42 (PR-3S)	Z2	572706 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00
	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100 R	1.107,00
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108 R	1.213,00
	M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107 R	1.213,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
	M 12 S (PR-2B)	Z8	574736 R	131,20
	M 15 S (PR-2B)	Z8	574738 R	131,20
	M 18 S (PR-2B)	Z8	574740 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20
	V 12		570107	159,90
	V 14		570132	159,90
	V 15		570115	159,90
	V 16		570137	159,90
	V 18		570125	159,90
	V 22		570135	159,90
	V 28		570145	159,90
	V 35		570155	159,90
	V 42		570165	373,00
	V 42 (PR-2B)	Z2	572850 R	334,00
	V 54		570175	383,00
	V 54 (PR-2B)	Z2	572851 R	361,00
	V 12 S (PR-2B)	Z8	574748 R	131,20
	V 14 S (PR-2B)	Z8	574750 R	131,20
	V 15 S (PR-2B)	Z8	574752 R	131,20
	V 16 S (PR-2B)	Z8	574754 R	131,20
	V 18 S (PR-2B)	Z8	574756 R	131,20
	V 22 S (PR-2B)	Z8	574758 R	131,20
	V 28 S (PR-2B)	Z8	574760 R	131,20
	V 35 S (PR-2B)	Z8	574762 R	131,20

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
SANHA-Therm Serie 24000	SA 12		570930	279,20	SANITOP PERMATUBO INOX	M 15		570110	159,90
	SA 15		570935	192,00		M 18 ¹⁾		570120	159,90
	SA 18		570940	192,00		M 22		570130	159,90
	SA 22		570945	192,00		M 28 ¹⁾		570140	159,90
	SA 28		570950	192,00		M 35		570150	159,90
	SA 35		570955	192,00		M 42 (PZ-4G)		570160	515,00
	M 12		570100	159,90		M 54 (PZ-4G)		570170	515,00
	M 15		570110	159,90		M 35 (PR-3S)	Z2	572727 R	696,00
	M 18		570120	159,90		M 42 (PR-3S)	Z2	572706 R	696,00
	M 22		570130	159,90		M 54 (PR-3S)	Z2	572708 R	696,00
	M 28		570140	159,90		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	M 35		570150	159,90		M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
	M 42 (PR-3S)	Z2	572706 R	696,00		M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
	M 54 (PR-3S)	Z2	572708 R	696,00		M 15 S (PR-2B)	Z8	574738 R	131,20
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108 R	1.213,00		M 18 S (PR-2B)	Z8	574740 R	131,20
	M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107 R	1.213,00		M 22 S (PR-2B)	Z8	574742 R	131,20
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00		M 28 S (PR-2B)	Z8	574744 R	131,20
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00		M 35 S (PR-2B)	Z8	574746 R	131,20
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00	SANPRO THPRESS	TH 16*		570460	192,90
	M 12 S (PR-2B)	Z8	574736 R	131,20		TH 20*		570470	192,90
	M 15 S (PR-2B)	Z8	574738 R	131,20		TH 26*		570475	192,90
	M 18 S (PR-2B)	Z8	574740 R	131,20		TH 32		570480	192,90
	M 22 S (PR-2B)	Z8	574742 R	131,20		TH 16 S (PR-2B)**	Z8	574782 R	158,20
SANHA-Therm Industry Serie 28000	M 28 S (PR-2B)	Z8	574744 R	131,20	SATEC SK ViTerm	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	M 35 S (PR-2B)	Z8	574746 R	131,20		TH 26 S (PR-2B)**	Z8	574794 R	158,20
	V 12		570107	159,90		TH 32 S (PR-2B)	Z8	574798 R	158,20
	V 15		570115	159,90		TH 16*		570460	192,90
	V 18		570125	159,90		TH 18*		570465	192,90
	V 22		570135	159,90	SAVEUR REFLEX PEX Water	TH 20*		570470	192,90
	V 28		570145	159,90		TH 26*		570475	192,90
	V 35		570155	159,90		TH 32		570480	192,90
	V 42		570165	373,00		U 40		570790	257,90
	V 42 (PR-2B)	Z2	572850 R	334,00		U 50		570795	310,00
	V 54		570175	383,00	SAVEUR REFLEX PEX-AL-PEX Gas	U 63 (PZ-S)		572365	669,00
	V 54 (PR-2B)	Z2	572851 R	361,00		TH 16*		570460	192,90
	V 12 S (PR-2B)	Z8	574748 R	131,20		TH 20*		570470	192,90
	V 15 S (PR-2B)	Z8	574752 R	131,20		TH 25*		570495	192,90
	V 18 S (PR-2B)	Z8	574756 R	131,20		TH 32		570480	192,90
	V 22 S (PR-2B)	Z8	574758 R	131,20	Schütz duo-flex tri-o-flex	TH 14*		570455	192,90
	V 28 S (PR-2B)	Z8	574760 R	131,20		TH 16*		570460	192,90
	V 35 S (PR-2B)	Z8	574762 R	131,20		TH 17*		570462	192,90
	SA 12		570930	279,20		TH 20*		570470	192,90
	SA 15		570935	192,00		TH 25*		570495	192,90
	SA 18		570940	192,00	Schwer Fittings AQUApress	TH 32		570480	192,90
	SA 22		570945	192,00		M 12		570100	159,90
	SA 28		570950	192,00		M 15		570110	159,90
	SA 35		570955	192,00		M 18		570120	159,90
	M 12		570100	159,90		M 22		570130	159,90
	M 15		570110	159,90	SESTA SESTA GAS	M 28		570140	159,90
	M 18		570120	159,90		M 35		570150	159,90
	M 22		570130	159,90		M 42 (PZ-4G)		570160	515,00
	M 28		570140	159,90		M 54 (PZ-4G)		570170	515,00
	M 35		570150	159,90		M 42 (PR-3S)	Z2	572706 R	696,00
	M 42 (PR-3S)	Z2	572706 R	696,00		M 54 (PR-3S)	Z2	572708 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00		M 12 S (PR-2B)	Z8	574736 R	131,20
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108 R	1.213,00		M 15 S (PR-2B)	Z8	574738 R	131,20
	M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107 R	1.213,00		M 18 S (PR-2B)	Z8	574740 R	131,20
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00		M 22 S (PR-2B)	Z8	574742 R	131,20
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00		M 28 S (PR-2B)	Z8	574744 R	131,20
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00		M 35 S (PR-2B)	Z8	574746 R	131,20
	M 12 S (PR-2B)	Z8	574736 R	131,20	Seppelfricke > Aalberts integrated piping systems	TH 14*		570455	192,90
	M 15 S (PR-2B)	Z8	574738 R	131,20		TH 16*		570460	192,90
	M 18 S (PR-2B)	Z8	574740 R	131,20		TH 20*		570470	192,90
	M 22 S (PR-2B)	Z8	574742 R	131,20		TH 26*		570475	192,90
	M 28 S (PR-2B)	Z8	574744 R	131,20		TH 32		570480	192,90
	M 35 S (PR-2B)	Z8	574746 R	131,20		TH 14 S (PR-2B)**	Z8	574778 R	158,20
	V 12		570107	159,90		TH 16 S (PR-2B)**	Z8	574782 R	158,20
	V 15		570115	159,90		TH 20 S (PR-2B)**	Z8	574788 R	158,20
	V 18		570125	159,90		TH 26 S (PR-2B)**	Z8	574794 R	158,20
	V 22		570135	159,90		TH 32 S (PR-2B)	Z8	574798 R	158,20
	V 28		570145	159,90	SESTA SESTA GAS	TH 14*		570455	192,90
	V 35		570155	159,90		TH 16*		570460	192,90
	V 42		570165	373,00		TH 20*		570470	192,90
	V 42 (PR-2B)	Z2	572850 R	334,00		TH 26*		570475	192,90
	V 54		570175	383,00		TH 32		570480	192,90
	V 54 (PR-2B)	Z2	572851 R	361,00		TH 14 S (PR-2B)**	Z8	574778 R	158,20
	V 12 S (PR-2B)	Z8	574748 R	131,20		TH 16 S (PR-2B)**	Z8	574782 R	158,20
	V 15 S (PR-2B)	Z8	574752 R	131,20		TH 20 S (PR-2B)**	Z8	574788 R	158,20
	V 18 S (PR-2B)	Z8	574756 R	131,20		TH 26 S (PR-2B)**	Z8	574794 R	158,20
	V 22 S (PR-2B)	Z8	574758 R	131,20		TH 32 S (PR-2B)	Z8	574798 R	158,20
	V 28 S (PR-2B)	Z8	574760 R	131,20					
	V 35 S (PR-2B)	Z8	574762 R	131,20					

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 227. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 227. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 230.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC, see page 238.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

¹³⁾ Only pressing tongs/S pressing rings (PR-2B) from designation "125" (1st quarter of 2025), "225" (2nd quarter of 2025) etc. can be used.
The designation is stamped on every pressing jaw.

The suitability of REMS pressing tools for pressfitting systems: Date 13.10.2025. For the updated situation regarding suitability status check our website:
www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 288 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
SESTA Sistema multistrato	H 16*		570320	173,60
	H 20*		570350	173,60
	TH 14*		570455	192,90
	TH 16*		570460	192,90
	TH 18*		570465	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	TH 40		570485	255,80
	TH 50 (PZ-S)		572400	669,00
	TH 63 (PZ-S)		572405	669,00
	TH 14 S (PR-2B)**	Z8	574778 R	158,20
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 18 S (PR-2B)**	Z8	574786 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 32 S (PR-2B)	Z8	574798 R	158,20
	U 16*		570765	180,70
	U 20*		570775	180,70
	U 16 S (PR-2B)**	Z8	574860 R	148,20
	U 20 S (PR-2B)**	Z8	574862 R	148,20
SIGMA LI Premium	TH 16*		570460	192,90
	TH 20*		570470	192,90
	TH 25*		570495	192,90
	TH 32		570480	192,90
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 25 S (PR-2B)**	Z8	574792 R	158,20
	TH 32 S (PR-2B)	Z8	574798 R	158,20
	U 16*		570765	180,70
	U 20*		570775	180,70
	U 25*		570780	180,70
	U 32		570785	211,20
	U 16 S (PR-2B)**	Z8	574860 R	148,20
	U 20 S (PR-2B)**	Z8	574862 R	148,20
	U 25 S (PR-2B)**	Z8	574864 R	148,20
	U 32 S (PR-2B)	Z8	574868 R	173,20
SLOVARM PEX-THERM	B 16		570850	210,20
	B 20		570860	210,20
	B 26		570870	232,50
	B 32		570880	232,50
	F 16		570717	183,80
	F 20		570727	183,80
	F 26		570730	199,00
	F 32		570735	199,00
	H 16		570320	173,60
	H 20		570350	173,60
	H 26		570370	173,60
	H 32		570380	173,60
	TH 16		570460	192,90
	TH 20		570470	192,90
	TH 26		570475	192,90
	TH 32		570480	192,90
	U 16		570765	180,70
	U 20		570775	180,70
	U 32		570785	211,20
STANDARD HIDRAULICA MultiStandard	Rfz 16*		571325	201,00
	Rfz 20*		571330	201,00
	Rfz 25		571335	201,00
	Rfz 32		571340	201,00
	U 16*		570765	180,70
	U 18*		570770	180,70
	U 20*		570775	180,70
	U 25*		570780	180,70
	U 32		570785	211,20
	U 40		570790	257,90
	U 50		570795	310,00
	U 63 (PR-3B)	Z4	572837 R	772,00
	U 63 (PZ-S)		572365	669,00
	U 16 S (PR-2B)**	Z8	574860 R	148,20
	U 18 S (PR-2B)**	Z8	574870 R	148,20
	U 20 S (PR-2B)**	Z8	574862 R	148,20
	U 25 S (PR-2B)**	Z8	574864 R	148,20
	U 32 S (PR-2B)	Z8	574868 R	173,20
STANDARD HIDRAULICA MultiStandard PLUS	H 16*		570320	173,60
	H 20*		570350	173,60
	H 25*		570360	173,60
	H 32		570380	173,60
	Rfz 16*		571325	201,00
	Rfz 20*		571330	201,00
	Rfz 25		571335	201,00
	Rfz 32		571340	201,00
	TH 16*		570460	192,90
	TH 20*		570470	192,90
	TH 25*		570495	192,90
	TH 32		570480	192,90
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 25 S (PR-2B)**	Z8	574792 R	158,20
	TH 32 S (PR-2B)**	Z8	574798 R	158,20
	U 16*		570765	180,70
	U 18*		570770	180,70
	U 20*		570775	180,70
	U 25*		570780	180,70
	U 32		570785	211,20
	U 16 S (PR-2B)**	Z8	574860 R	148,20
	U 18 S (PR-2B)**	Z8	574870 R	148,20
	U 20 S (PR-2B)**	Z8	574862 R	148,20
	U 25 S (PR-2B)**	Z8	574864 R	148,20
	U 32 S (PR-2B)	Z8	574868 R	173,20
steeltrade Presssystem Edelstahl Kontur M	M 15		570110	159,90
	M 18 ¹⁾		570120	159,90
	M 22		570130	159,90
	M 28 ¹⁾		570140	159,90
	M 35		570150	159,90
	M 42 (PR-3S)	Z2	572706 R	696,00
	M 56 (PR-3S)	Z2	572708 R	696,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
	M 15 S (PR-2B)	Z8	574738 R	131,20
	M 18 S (PR-2B)	Z8	574740 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
STELBI Polikraft	H 16*		570320	173,60
	H 20*		570350	173,60
	H 26*		570370	173,60
	TH 16*		570460	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	TH 40		570485	255,80
	TH 50 (PZ-S)		572400	669,00
	TH 63 (PZ-S)		572405	669,00
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 32 S (PR-2B)	Z8	574798 R	158,20
	U 16*		570765	180,70
	U 20*		570775	180,70
	U 26* ¹²⁾		570750	211,20
	U 16 S (PR-2B)**	Z8	574860 R	148,20
	U 20 S (PR-2B)**	Z8	574862 R	148,20
	U 26 S (PR-2B)**	Z8	574866 R	173,20
STELBI Stelgas	TH 16*		570460	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
STH Westco COPPER PRESS	M 15		570110	159,90
	M 22		570130	159,90
	M 28 ¹⁾		570140	159,90
	M 35		570150	159,90
	M 42 (PR-3S)	Z2	572706 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00
	M 15 S (PR-2B)	Z8	574738 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20
T				
TDM BRASS Serie 1600	H 16*		570320	173,60
	H 18*		570340	173,60
	H 20*		570350	173,60
	H 25*		570360	173,60
	H 26*		570370	173,60
	H 32		570380	173,60
	TH 16*		570460	192,90
	TH 18*		570465	192,90
	TH 20*		570470	192,90
	TH 25*		570495	192,90
	TH 26*		570475	192,90
	THL 32		570487	192,90
	TH 40		570485	255,80
	TH 50 (PZ-S)		572400	669,00
	TH 63 (PZ-S)		572405	669,00
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 18 S (PR-2B)**	Z8	574786 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 25 S (PR-2B)**	Z8	574792 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	U 16*		570765	180,70
	U 18*		570770	180,70
	U 20*		570775	180,70
TDM BRASS Serie 2600	U 25*		570780	180,70
	U 26* ¹²⁾		570750	211,20
	U 32		570785	211,20
	U 16 S (PR-2B)**	Z8	574860 R	148,20
	U 18 S (PR-2B)**	Z8	574870 R	148,20
	U 20 S (PR-2B)**	Z8	574862 R	148,20
	U 25 S (PR-2B)**	Z8	574864 R	148,20
	U 26 S (PR-2B)**	Z8	574866 R	173,20
	U 32 S (PR-2B)	Z8	574868 R	173,20
	H 16*		570320	173,60
	H 18*		570340	173,60
	H 20*		570350	173,60
	H 25*		570360	173,60
	H 26*		570370	173,60
	H 32		570380	173,60
	TH 16*		570460	192,90
	TH 18*		570465	192,90
	TH 20*		570470	192,90
	TH 25*		570495	192,90
	TH 26*		570475	192,90
	THL 32		570487	192,90
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 18 S (PR-2B)**	Z8	574786 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 25 S (PR-2B)**	Z8	574792 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
TDM BRASS Serie 1700 gas	U 16*		570765	180,70
	U 18*		570770	180,70
	U 20*		570775	180,70
	U 25*		570780	180,70
	U 26* ¹²⁾		570750	211,20
	U 32		570785	211,20
	U 16 S (PR-2B)**	Z8	574860 R	148,20
	U 18 S (PR-2B)**	Z8	574870 R	148,20
	U 20 S (PR-2B)**	Z8	574862 R	148,20
	U 25 S (PR-2B)**	Z8	574864 R	148,20
	U 26 S (PR-2B)**	Z8	574866 R	173,20
	U 32 S (PR-2B)	Z8	574868 R	173,20
	TH 16*		570460	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
	THL 32		570487	192,90
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
TermoConcept TC-PRESS	Basic E01 ⁵⁾		571855	321,00
THERMOLUTZ	H 14*		570310	173,60
	H 16*		570320	173,60
	TH 20*		570470	192,90
	TH 20 S (PR-2B)**	Z8	574788 R	158,20

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
TE-SA TE-SA press serie 800	TH 14*		570455	192,90	TIEMME Serie 1650CTSN Serie COMPACT	TH 16*		570460	192,90
	TH 16*		570460	192,90		TH 20*		570470	192,90
	TH 18*		570465	192,90		TH 25*		570495	192,90
	TH 20*		570470	192,90		TH 26*		570475	192,90
	TH 26*		570475	192,90		THL 32		570487	192,90
	TH 32		570480	192,90		TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 40		570485	255,80		TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 50 (PZ-S)		572400	669,00		TH 25 S (PR-2B)**	Z8	574792 R	158,20
	TH 63 (PZ-S)		572405	669,00		TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 14 S (PR-2B)**	Z8	574778 R	158,20	TIEMME Serie 1700 COBRAPEX	RFz 12*		571320	201,00
	TH 16 S (PR-2B)**	Z8	574782 R	158,20		RFz 16*		571325	201,00
	TH 18 S (PR-2B)**	Z8	574786 R	158,20		RFz 20*		571330	201,00
	TH 20 S (PR-2B)**	Z8	574788 R	158,20		RFz 25		571335	201,00
	TH 26 S (PR-2B)**	Z8	574794 R	158,20		RFz 32		571340	201,00
	TH 32 S (PR-2B)	Z8	574798 R	158,20		TH 40		570485	255,80
THERMACOME ACOPEX ALU	H 16*		570320	173,60		TH 50 (PZ-S)		572400	669,00
	H 20*		570350	173,60		TH 63 (PZ-S)		572405	669,00
	H 26*		570370	173,60	TIEMME Serie 2650 GAS	TH 16*		570460	192,90
	H 32		570380	173,60		TH 20*		570470	192,90
	TH 16*		570460	192,90		TH 26*		570475	192,90
	TH 20*		570470	192,90		THL 32		570487	192,90
	TH 26*		570475	192,90		TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 32		570480	192,90		TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 40		570485	255,80	TIGRE ALPEX GAS	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 50 (PZ-S)		572400	669,00		TH 16*		570460	192,90
	U 16*		570765	180,70		TH 20*		570470	192,90
	U 20*		570775	180,70		TH 26*		570475	192,90
	U 32		570785	211,20	TKM Systemtechnik	TH 32		570480	192,90
	U 40		570790	257,90		TH 40		570485	255,80
	U 50		570795	310,00		TH 50 (PZ-S)		572400	669,00
TIEMME Serie 1650 AL-COBRAPEX	TH 14*		570455	192,90		TH 63 (PZ-S)		572405	669,00
	TH 16*		570460	192,90	TRA Multi TRA+	H 16*		570320	173,60
	TH 18*		570465	192,90		H 20*		570350	173,60
	TH 20*		570470	192,90		H 25*		570360	173,60
	TH 25*		570495	192,90		H 26*		570370	173,60
	TH 26*		570475	192,90		H 32		570380	173,60
	THL 32		570487	192,90		H 40 (PZ-4G)		570390	586,00
	TH 40		570485	255,80		TH 16*		570460	192,90
	TH 50 (PZ-S)		572400	669,00		TH 20*		570470	192,90
	TH 63 (PZ-S)		572405	669,00		TH 25*		570495	192,90
	THz 75 (PR-3B)	Z4	572829 R	641,00		TH 26*		570475	192,90
	TH 14 S (PR-2B)**	Z8	574778 R	158,20		TH 32		570480	192,90
	TH 16 S (PR-2B)**	Z8	574782 R	158,20		TH 40		570485	255,80
	TH 18 S (PR-2B)**	Z8	574786 R	158,20		TH 50 (PZ-S)		572400	669,00
	TH 20 S (PR-2B)**	Z8	574788 R	158,20		TH 63 (PZ-S)		572405	669,00
	TH 25 S (PR-2B)**	Z8	574792 R	158,20	TRA MULTITRAPRESS	THz 75 (PR-3B)	Z4	572829 R	641,00
	TH 26 S (PR-2B)**	Z8	574794 R	158,20		TH 16 S (PR-2B)**	Z8	574782 R	158,20
TIEMME Serie 1650CT Serie COMPACT	TH 16*		570460	192,90		TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 20*		570470	192,90		TH 25 S (PR-2B)**	Z8	574792 R	158,20
	TH 25*		570495	192,90		TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 26*		570475	192,90		TH 32 S (PR-2B)	Z8	574798 R	158,20
	THL 32		570487	192,90		U 16*		570765	180,70
	TH 16 S (PR-2B)**	Z8	574782 R	158,20		U 20*		570775	180,70
	TH 20 S (PR-2B)**	Z8	574788 R	158,20		U 25*		570780	180,70
	TH 25 S (PR-2B)**	Z8	574792 R	158,20		U 26* ¹²⁾		570750	211,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20		U 32		570785	211,20
TIEMME Serie 1650SN	TH 14*		570455	192,90		U 40		570790	257,90
	TH 16*		570460	192,90		U 50		570795	310,00
	TH 18*		570465	192,90		U 63 (PR-3B)	Z4	572837 R	772,00
	TH 20*		570470	192,90		U 63 (PZ-S)		572365	669,00
	TH 25*		570495	192,90		U 75 (PR-3B)	Z4	572828 R	680,00
	TH 26*		570475	192,90	TRA MULTITRAPRESS	U 16*		570765	180,70
	THL 32		570487	192,90		U 18*		570770	180,70
	TH 40		570485	255,80		U 20*		570775	180,70
	TH 50 (PZ-S)		572400	669,00		U 25*		570780	180,70
	TH 63 (PZ-S)		572405	669,00		U 32		570785	211,20
	TH 14 S (PR-2B)**	Z8	574778 R	158,20		U 40		570790	257,90
	TH 16 S (PR-2B)**	Z8	574782 R	158,20		U 50		570795	310,00
	TH 18 S (PR-2B)**	Z8	574786 R	158,20		U 63 (PR-3B)	Z4	572837 R	772,00
	TH 20 S (PR-2B)**	Z8	574788 R	158,20		U 63 (PZ-S)		572365	669,00
	TH 25 S (PR-2B)**	Z8	574792 R	158,20					
	TH 26 S (PR-2B)**	Z8	574794 R	158,20					

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 227. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 227. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 230.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC, see page 238.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

¹³⁾ Only pressing tongs/S pressing rings (PR-2B) from designation "125" (1st quarter of 2025), "225" (2nd quarter of 2025) etc. can be used. The designation is stamped on every pressing jaw.

The suitability of REMS pressing tools for pressfitting systems: Date 13.10.2025. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 288 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
TRA TRAPRESS	H 12*		570300	173,60
	H 16*		570320	173,60
	H 20*		570350	173,60
	H 25*		570360	173,60
	H 32		570380	173,60
	Rfz 12*		571320	201,00
	Rfz 16*		571325	201,00
	Rfz 20*		571330	201,00
	Rfz 25		571335	201,00
	Rfz 32		571340	201,00
	K16/P18*		572600	201,00
	K/20*		572605	201,00
	K/25*		572610	201,00
Tradelink TradePex Crimp Water	K32		572615	201,00
	K1/40		572620	201,00
	K1/50		572625	330,00
	K16/P18*		572600	201,00
	K/20*		572605	201,00
Tradelink TradePex Crimp Gas	K/25*		572610	201,00
	K32		572615	201,00
	K1/40		572620	201,00
	K1/50		572625	330,00
TUBIPLAST ITALY MULTILAYER PIPE	H 16*		570320	173,60
	H 18*		570340	173,60
	H 20*		570350	173,60
	H 26*		570370	173,60
	H 32		570380	173,60
	TH 16*		570460	192,90
	TH 18*		570465	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	TH 40		570485	255,80
	TH 50 (PZ-S)		572400	669,00
	TH 63 (PZ-S)		572405	669,00
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 18 S (PR-2B)**	Z8	574786 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 32 S (PR-2B)	Z8	574798 R	158,20
	U 16*		570765	180,70
	U 18*		570770	180,70
	U 20*		570775	180,70
	U 26* ⁽¹²⁾		570750	211,20
	U 32		570785	211,20
	U 16 S (PR-2B)**	Z8	574860 R	148,20
	U 18 S (PR-2B)**	Z8	574870 R	148,20
	U 20 S (PR-2B)**	Z8	574862 R	148,20
	U 26 S (PR-2B)**	Z8	574866 R	173,20
	U 32 S (PR-2B)	Z8	574868 R	173,20
TUBIPLAST ITALY MULTILAYER PIPE GAS SYSTEM	TH 16*		570460	192,90
	TH 18*		570465	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 18 S (PR-2B)**	Z8	574786 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 32 S (PR-2B)	Z8	574798 R	158,20
TWEETOP	U 16*		570765	180,70
	U 18*		570770	180,70
	U 20*		570775	180,70
	U 25*		570780	180,70
	U 32		570785	211,20
	U 40		570790	257,90
	U 50		570795	310,00
	U 63 (PZ-S)		572365	669,00
	U 63 (PR-3B)	Z4	572837 R	772,00
	U 75 (PR-3B)	Z4	572828 R	680,00
	U 16 S (PR-2B)**	Z8	574860 R	148,20
	U 18 S (PR-2B)**	Z8	574870 R	148,20
	U 20 S (PR-2B)**	Z8	574862 R	148,20
	U 25 S (PR-2B)**	Z8	574864 R	148,20
	U 32 S (PR-2B)	Z8	574868 R	173,20
U				
UNICAL AG MAX-MULTIPEX	H 26*		570370	173,60
	U 16*		570765	180,70
	U 20*		570775	180,70
	U 26* ⁽¹²⁾		570750	211,20
	U 32		570785	211,20
UNIDELTA DELTAPRESS	H 16*		570320	173,60
	H 20*		570350	173,60
	H 26*		570370	173,60
	H 32		570380	173,60
	H 40 (PZ-4G)		570390	586,00
	TH 16*		570460	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	TH 40		570485	255,80
	TH 50 (PZ-S)		572400	669,00
	TH 63 (PZ-S)		572405	669,00
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 32 S (PR-2B)	Z8	574798 R	158,20
	U 16*		570765	180,70
	U 20*		570775	180,70
	U 32		570785	211,20
	U 40		570790	257,90
	U 50		570795	310,00
	U 63 (PZ-S)		572365	669,00
	U 16 S (PR-2B)**	Z8	574860 R	148,20
	U 20 S (PR-2B)**	Z8	574862 R	148,20
	U 32 S (PR-2B)	Z8	574868 R	173,20
Uponor	UP 14*		572630	180,70
	UP 16*		572632	180,70
	UP 20*		572636	180,70
	UP 25		572638	180,70
	UP 32		572640	211,20
	U 40		570790	257,90
	U 50		570795	310,00
	U 63 (PR-3B)	Z4	572837 R	772,00
	U 63 (PZ-S)		572365	669,00
	U 75 (PR-3B)	Z4	572828 R	680,00

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
V				
Valsir Bravopress	B 16*		570850	210,20
	B 20*		570860	210,20
	B 26		570870	232,50
	B 32		570880	232,50
	F 16*		570717	183,80
	F 20*		570727	183,80
	F 26*		570730	199,00
	F 16 S (PR-2B)**	Z8	574728 R	150,80
	F 20 S (PR-2B)**	Z8	574730 R	150,80
	F 26 S (PR-2B)**	Z8	574732 R	163,20
	H 16*		570320	173,60
	H 20*		570350	173,60
	H 26*		570370	173,60
	H 32		570380	173,60
	H 32 V		570685	225,60
	TH 16*		570460	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
Valsir PEXAL	U 16*		570765	180,70
	U 20*		570775	180,70
	U 26* ⁽¹²⁾		570750	211,20
	U 32		570785	211,20
	H 14*		570310	173,60
	H 16*		570320	173,60
	H 20*		570350	173,60
	H 26*		570370	173,60
	H 32		570380	173,60
	H 32 V		570685	225,60
	TH 16*		570460	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	TH 40		570485	255,80
	TH 50 (PZ-S)		572400	669,00
	TH 63 (PZ-S)		572405	669,00
	U 16*		570765	180,70
	U 20*		570775	180,70
Van Marcke NV SYSTEMPEX	U 26* ⁽¹²⁾		570750	211,20
	U 32		570785	211,20
	U 40		570790	257,90
	U 50		570795	310,00
	U 63 (PR-3B)	Z4	572837 R	772,00
	U 63 (PZ-S)		572365	669,00
	U 75 (PR-3B)	Z4	572828 R	680,00
	TH 16*		570460	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	TH 40		570485	255,80
	TH 50 (PZ-S)		572400	669,00
	TH 63 (PZ-S)		572405	669,00
	THz 75 (PR-3B)	Z4	572829 R	641,00
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 32 S (PR-2B)	Z8	574798 R	158,20
Van Marcke NV Tubipress	M 12		570100	159,90
	M 15		570110	159,90
	M 18		570120	159,90
	M 22		570130	159,90
	M 28		570140	159,90
	M 35		570150	159,90
	M 42 (PZ-4G)		570160	515,00
	M 54 (PZ-4G)		570170	515,00
	M 42 (PR-3S)	Z2	572706 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00
	M 76,1 XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579101 R	1.213,00
	M 88,9 G XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579110 R	1.416,00
	M 108,0 G XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579111 R	1.416,00
	M 12 S (PR-2B)	Z8	574736 R	131,20
	M 15 S (PR-2B)	Z8	574738 R	131,20
	M 18 S (PR-2B)	Z8	574740 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20
Variotherm System TH	TH 11,6*		570482	192,90
	TH 16*		570460	192,90
	TH 20*		570470	192,90
	TH 11,6 S (PR-2B)**	Z8	574774 R	158,20
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
VESBO CARBON	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	M 15		570110	159,90
	M 18		570120	159,90
	M 22		570130	159,90
	M 28		570140	159,90
	M 35		570150	159,90
	M 42 (PR-3S)	Z2	572706 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00
	M 76,1 XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579101 R	1.213,00
	M 88,9 G XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579110 R	1.416,00
VESBO INOX	M 108,0 G XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579111 R	1.416,00
	M 15 S (PR-2B)	Z8	574738 R	131,20
	M 18 S (PR-2B)	Z8	574740 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20
	M 15		570110	159,90
	M 18		570120	159,90
	M 22		570130	159,90
	M 28		570140	159,90

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€
VESBO MULTIPRESS TH-U	TH 16*		570460	192,90
	TH 20*		570470	192,90
	TH 24*		570475	192,90
	TH 32		570480	192,90
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 32 S (PR-2B)	Z8	574798 R	158,20
	U 16*		570765	180,70
	U 20*		570775	180,70
	U 26* ¹²⁾		570750	211,20
	U 32		570785	211,20
	U 16 S (PR-2B)**	Z8	574860 R	148,20
	U 20 S (PR-2B)**	Z8	574862 R	148,20
	U 26 S (PR-2B)**	Z8	574866 R	173,20
	U 32 S (PR-2B)	Z8	574868 R	173,20
VESBO VPREMIUM	U 16*		570765	180,70
	U 20*		570775	180,70
	U 25*		570780	180,70
	U 32		570785	211,20
	U 40		570790	257,90
	U 50		570795	310,00
	U 63 (PZ-S)		572365	669,00
	U 16 S (PR-2B)**	Z8	574860 R	148,20
	U 20 S (PR-2B)**	Z8	574862 R	148,20
	U 25 S (PR-2B)**	Z8	574864 R	148,20
	U 32 S (PR-2B)	Z8	574868 R	173,20
Viega Fonterra	VX 12*		571630	222,30
	VP 14/15*		570905	191,90
	VP 16/17*		570910	191,90
	VP 20*		570915	191,90
	VP 25 ²⁾		570920	191,90
Viega MegaPress (ASTM) ¹⁰⁾	VMP ¾" (OD 17,2 mm)		571740	222,30
	VMP ½" G (OD 21,3 mm)		571766 R	222,30
	VMPz ¾" (OD 26,9 mm)		571764	222,30
	VMPz 1" (OD 33,7 mm)		571767	222,30
	VMPz 1¼" (PZ-S) (OD 42,4 mm)		572413	730,00
	VMPz 1½" (PR-3B) (OD 48,3 mm)	Z5	572844 R	505,00
	VMPz 2" (PR-3B) (OD 60,3 mm)	Z5	572845 R	505,00
Viega MegaPress 304 FKM (ASTM) ¹⁰⁾	VMP ½" G (OD 21,3 mm)		571766 R	222,30
	VMPz ¾" (OD 26,9 mm)		571764	222,30
	VMPz 1" (OD 33,7 mm)		571767	222,30
	VMPz 1¼" (PZ-S) (OD 42,4 mm)		572413	730,00
	VMPz 1½" (PR-3B) (OD 48,3 mm)	Z5	572844 R	505,00
	VMPz 2" (PR-3B) (OD 60,3 mm)	Z5	572845 R	505,00
Viega MegaPress 316 (ASTM) ¹⁰⁾	VMP ½" G (OD 21,3 mm)		571766 R	222,30
	VMPz ¾" (OD 26,9 mm)		571764	222,30
	VMPz 1" (OD 33,7 mm)		571767	222,30
	VMPz 1¼" (PZ-S) (OD 42,4 mm)		572413	730,00
	VMPz 1½" (PR-3B) (OD 48,3 mm)	Z5	572844 R	505,00
	VMPz 2" (PR-3B) (OD 60,3 mm)	Z5	572845 R	505,00
Viega MegaPress 316 FKM (ASTM) ¹⁰⁾	VMP ½" G (OD 21,3 mm)		571766 R	222,30
	VMPz ¾" (OD 26,9 mm)		571764	222,30
	VMPz 1" (OD 33,7 mm)		571767	222,30
	VMPz 1¼" (PZ-S) (OD 42,4 mm)		572413	730,00
	VMPz 1½" (PR-3B) (OD 48,3 mm)	Z5	572844 R	505,00
	VMPz 2" (PR-3B) (OD 60,3 mm)	Z5	572845 R	505,00
Viega MegaPress CuNi (ASTM) ¹⁰⁾	VMP ½" G (OD 21,3 mm)		571766 R	222,30
	VMPz ¾" (OD 26,9 mm)		571764	222,30
	VMPz 1" (OD 33,7 mm)		571767	222,30
	VMPz 1¼" (PZ-S) (OD 42,4 mm)		572413	730,00
	VMPz 1½" (PR-3B) (OD 48,3 mm)	Z5	572844 R	505,00
	VMPz 2" (PR-3B) (OD 60,3 mm)	Z5	572845 R	505,00
Viega MegaPress FKM (ASTM) ¹⁰⁾	VMP ½" G (OD 21,3 mm)		571766 R	222,30
	VMPz ¾" (OD 26,9 mm)		571764	222,30
	VMPz 1" (OD 33,7 mm)		571767	222,30
	VMPz 1¼" (PZ-S) (OD 42,4 mm)		572413	730,00
	VMPz 1½" (PR-3B) (OD 48,3 mm)	Z5	572844 R	505,00
	VMPz 2" (PR-3B) (OD 60,3 mm)	Z5	572845 R	505,00
Viega Megapress (EN) ¹⁾	VMP ¾" (OD 17,2 mm)		571740	222,30
	VMP ½" G (OD 21,3 mm)		571766 R	222,30
	VMPz ¾" (OD 26,9 mm)		571764	222,30
	VMPz 1" (OD 33,7 mm)		571767	222,30
	VMPz 1¼" (PZ-S) (OD 42,4 mm)		572413	730,00
	VMPz 1½" (PR-3B) (OD 48,3 mm)	Z5	572844 R	505,00
	VMPz 2" (PR-3B) (OD 60,3 mm)	Z5	572845 R	505,00
Viega Megapress S (EN) ¹⁾	VMP ¾" (OD 17,2 mm)		571740	222,30
	VMP ½" G (OD 21,3 mm)		571766 R	222,30
	VMPz ¾" (OD 26,9 mm)		571764	222,30
	VMPz 1" (OD 33,7 mm)		571767	222,30
	VMPz 1¼" (PZ-S) (OD 42,4 mm)		572413	730,00
	VMPz 1½" (PR-3B) (OD 48,3 mm)	Z5	572844 R	505,00
	VMPz 2" (PR-3B) (OD 60,3 mm)	Z5	572845 R	505,00

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€
Viega Megapress S XL (EN) ¹⁾	VMPz 2½" XL (PR-3B) EN (OD 76,1 mm)	Z7 XL 45 kN ⁴⁾	579112 R	635,00
	VMPz 3" XL (PR-3B) (OD 88,9 mm)	Z7 XL 45 kN ⁴⁾	579113 R	635,00
	VMPz 4" XL (PR-3B) (OD 114,3 mm)	Z7 XL 45 kN ⁴⁾	579114 R	678,00
Viega Pexfit	VX 16*		571635	222,30
	VX 20*		571640	222,30
	VX 25*		571645	222,30
Viega Pexfit G	VX 16*		571635	222,30
	VX 20*		571640	222,30
	VX 25*		571645	222,30
Viega Prestabo	V 12		570107	159,90
	V 15		570115	159,90
	V 18		570125	159,90
	V 22		570135	159,90
	V 28		570145	159,90
	V 35		570155	159,90
	V 42		570165	373,00
	V 42 (PR-2B)	Z2	572850 R	334,00
	V 54		570175	383,00
	V 54 (PR-2B)	Z2	572851 R	361,00
	VFz 64,0 (PR-3B) ⁴⁾	Z5	572815 R	641,00
	VFz 76,1 (PR-3B) ⁴⁾	Z5	572816 R	641,00
	VFz 88,9 (PR-3B) ⁴⁾	Z5	572817 R	680,00
	VFz 108,0 (PR-3B) ⁴⁾	Z5	572818 R	680,00
	V 12 S (PR-2B)	Z8	574748 R	131,20
	V 15 S (PR-2B)	Z8	574752 R	131,20
	V 18 S (PR-2B)	Z8	574756 R	131,20
	V 22 S (PR-2B)	Z8	574758 R	131,20
	V 28 S (PR-2B)	Z8	574760 R	131,20
	V 35 S (PR-2B)	Z8	574762 R	131,20
Viega Profipress	V 12		570107	159,90
	V 14 ¹³⁾		570132	159,90
	V 15		570115	159,90
	V 16 ¹³⁾		570137	159,90
	V 18		570125	159,90
	V 22		570135	159,90
	V 28		570145	159,90
	V 35		570155	159,90
	V 42		570165	373,00
	V 42 (PR-2B)	Z2	572850 R	334,00
	V 54		570175	383,00
	V 54 (PR-2B)	Z2	572851 R	361,00
	VFz 64,0 (PR-3B) ⁴⁾	Z5	572815 R	641,00
	VFz 66,7 (PR-3B)	Z5	572846 R	641,00
	VFz 76,1 (PR-3B) ⁴⁾	Z5	572816 R	641,00
Viega Profipress G	VFz 88,9 (PR-3B) ⁴⁾	Z5	572817 R	680,00
	VFz 108,0 (PR-3B) ⁴⁾	Z5	572818 R	680,00
	V 12 S (PR-2B)	Z8	574748 R	131,20
	V 14 S (PR-2B) ¹³⁾	Z8	574750 R	131,20
	V 15 S (PR-2B)	Z8	574752 R	131,20
	V 16 S (PR-2B) ¹³⁾	Z8	574754 R	131,20
	V 18 S (PR-2B)	Z8	574756 R	131,20
	V 22 S (PR-2B)	Z8	574758 R	131,20
	V 28 S (PR-2B)	Z8	574760 R	131,20
	V 35 S (PR-2B)	Z8	574762 R	131,20
Viega Profipress S	V 12		570107	159,90
	V 15		570115	159,90
	V 18		570125	159,90
	V 22		570135	159,90
	V 35		570145	159,90
	V 35 S (PR-2B)		570155	159,90
	V 12 S (PR-2B)	Z8	574748 R	131,20
	V 15 S (PR-2B)	Z8	574752 R	131,20
	V 18 S (PR-2B)	Z8	574756 R	131,20
	V 22 S (PR-2B)	Z8	574758 R	131,20
	V 28 S (PR-2B)	Z8	574760 R	131,20
	V 35 S (PR-2B)	Z8	574762 R	131,20

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 227. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 227. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 230.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC, see page 238.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

¹³⁾ Only pressing tongs/S pressing rings (PR-2B) from designation "125" (1st quarter of 2025), "225" (2nd quarter of 2025) etc. can be used. The designation is stamped on every pressing jaw.

The suitability of REMS pressing tools for pressfitting systems: Date 13.10.2025. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 288 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
Viega Profipress Therm	V 12		570107	159,90
	V 15		570115	159,90
	V 18		570125	159,90
	V 22		570135	159,90
	V 12 S (PR-2B)	Z8	574748 R	131,20
	V 15 S (PR-2B)	Z8	574752 R	131,20
Viega ProPress (ASTM) ^(a)	V 18 S (PR-2B)	Z8	574756 R	131,20
	V 22 S (PR-2B)	Z8	574758 R	131,20
	VUS ½" (OD 15,9 mm)		571770	192,90
	VUS ¾" (OD 22,2 mm)		571775	192,90
	VUS 1" (OD 28,6 mm)		571780	192,90
	VUS 1¼" (OD 34,9 mm)		571785	192,90
XL-C/XL-S	VUS 1½" (OD 41,3 mm)		571790	373,00
	VUS 2" (OD 54,0 mm)		571795	383,00
	VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z5	572819 R	641,00
	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820 R	641,00
	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821 R	680,00
Viega ProPress 304 FKM (ASTM) ^(a)	VUS ½" (OD 15,9 mm)		571770	192,90
	VUS ¾" (OD 22,2 mm)		571775	192,90
	VUS 1" (OD 28,6 mm)		571780	192,90
	VUS 1¼" (OD 34,9 mm)		571785	192,90
	VUS 1½" (OD 41,3 mm)		571790	373,00
	VUS 2" (OD 54,0 mm)		571795	383,00
XL-C/XL-S	VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z5	572819 R	641,00
	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820 R	641,00
	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821 R	680,00
Viega ProPress 316 (ASTM) ^(a)	VUS ½" (OD 15,9 mm)		571770	192,90
	VUS ¾" (OD 22,2 mm)		571775	192,90
	VUS 1" (OD 28,6 mm)		571780	192,90
	VUS 1¼" (OD 34,9 mm)		571785	192,90
	VUS 1½" (OD 41,3 mm)		571790	373,00
	VUS 2" (OD 54,0 mm)		571795	383,00
XL-C/XL-S	VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z5	572819 R	641,00
	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820 R	641,00
	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821 R	680,00
Viega Propress WATER System AUS	VAU 15 (OD 12,7 mm)		572687	164,90
	VAU 20 (OD 19,1 mm)		572689	164,90
	VAU 25 (OD 25,4 mm)		572691	164,90
	VAU 32 (OD 31,8 mm)		572693	174,00
	VAU 40 (OD 38,1 mm)		572695	257,90
	VAU 50 (OD 50,8 mm)		572697	457,00
	VAU 15 S (PR-2B) (OD 12,7 mm)	Z8	574804 R	135,30
	VAU 20 S (PR-2B)** (OD 19,1 mm)	Z8	574806 R	135,30
Viega PropressG GAS System AUS	VAU 25 S (PR-2B)** (OD 25,4 mm)	Z8	574808 R	135,30
	VAU 32 S (PR-2B) (OD 31,8 mm)	Z8	574856 R	142,70
	VAU 15 (OD 12,7 mm)		572687	164,90
	VAU 20 (OD 19,1 mm)		572689	164,90
Viega Raxinox	VAU 25 (OD 25,4 mm)		572691	164,90
	VAU 32 (OD 31,8 mm)		572693	174,00
	VAU 40 (OD 38,1 mm)		572695	257,90
	VAU 50 (OD 50,8 mm)		572697	457,00
	VRX 16		571750	202,00
Viega Raxofix	VRX 20		571752	202,00
	VRX 16		571750	202,00
	VRX 20		571752	202,00
	VRX 25		571754	222,30
	VRX 32		571756	222,30
	VRX 40		571758	309,00
	VRX 50		571760	362,00
Viega Sanfix ⁽²⁾	VRX 63		571797	699,00
	VP 16/17 ⁽³⁾		570910	191,90
	VP 20 ⁽³⁾		570915	191,90
	VP 25 ⁽³⁾		570920	191,90
	VP 32		570925	212,20
	VP 40 (PZ-4G)		570970	511,00
	VPz 50 (PZ-S)		572350	669,00
Viega Sanfix Fosta ⁽³⁾	VPz 63 (PZ-S)		572355	669,00
	VP 16/17 ⁽³⁾		570910	191,90
	VP 20 ⁽³⁾		570915	191,90
	VP 25 ⁽³⁾		570920	191,90
	VP 32		570925	212,20
	VP 40 (PZ-4G)		570970	511,00
	VPz 50 (PZ-S)		572350	669,00
Viega Sanpress	VPz 63 (PZ-S)		572355	669,00
	V 12		570107	159,90
	V 15		570115	159,90
	V 18		570125	159,90
	V 22		570135	159,90
	V 28		570145	159,90
	V 35		570155	159,90
Viega Sanpress Inox	V 42		570165	373,00
	V 42 (PR-2B)	Z2	572850 R	334,00
	V 54		570175	383,00
	V 54 (PR-2B)	Z2	572851 R	361,00
	VR 76,1 (PR-3B) ⁽⁴⁾	Z5	572822 R	641,00
	VR 88,9 (PR-3B) ⁽⁴⁾	Z5	572823 R	680,00
	VR 108,0 (PR-3B) ⁽⁴⁾	Z5	572824 R	680,00
	V 12 S (PR-2B)	Z8	574748 R	131,20
	V 15 S (PR-2B)	Z8	574752 R	131,20
	V 18 S (PR-2B)	Z8	574756 R	131,20
	V 22 S (PR-2B)	Z8	574758 R	131,20
	V 28 S (PR-2B)	Z8	574760 R	131,20
	V 35 S (PR-2B)	Z8	574762 R	131,20
	V 15		570115	159,90
	V 18		570125	159,90
	V 22		570135	159,90
	Viega Sanpress	V 28		570145
V 35			570155	159,90
V 42			570165	373,00
V 42 (PR-2B)		Z2	572850 R	334,00
V 54			570175	383,00
V 54 (PR-2B)		Z2	572851 R	361,00
Vfz 64,0 (PR-3B) ⁽⁴⁾		Z5	572815 R	641,00
Vfz 76,1 (PR-3B) ⁽⁴⁾		Z5	572816 R	641,00
Vfz 88,9 (PR-3B) ⁽⁴⁾		Z5	572817 R	680,00
Vfz 108,0 (PR-3B) ⁽⁴⁾		Z5	572818 R	680,00
V 15 S (PR-2B)		Z8	574752 R	131,20
V 18 S (PR-2B)		Z8	574756 R	131,20
V 22 S (PR-2B)		Z8	574758 R	131,20
V 28 S (PR-2B)		Z8	574760 R	131,20
V 35 S (PR-2B)		Z8	574762 R	131,20
V 15			570115	159,90
V 18			570125	159,90
V 22		570135	159,90	
Viega Sanpress	V 28		570145	159,90
	V 35		570155	159,90
	V 42		570165	373,00
	V 42 (PR-2B)	Z2	572850 R	334,00
	V 54		570175	383,00
	V 54 (PR-2B)	Z2	572851 R	361,00
	Vfz 64,0 (PR-3B) ⁽⁴⁾	Z5	572815 R	641,00
	Vfz 76,1 (PR-3B) ⁽⁴⁾	Z5	572816 R	641,00
	Vfz 88,9 (PR-3B) ⁽⁴⁾	Z5	572817 R	680,00
	Vfz 108,0 (PR-3B) ⁽⁴⁾	Z5	572818 R	680,00
	V 15 S (PR-2B)	Z8	574752 R	131,20
	V 18 S (PR-2B)	Z8	574756 R	131,20
	V 22 S (PR-2B)	Z8	574758 R	131,20
	V 28 S (PR-2B)	Z8	574760 R	131,20
	V 35 S (PR-2B)	Z8	574762 R	131,20
	V 15		570115	159,90
	V 18		570125	159,90
V 22		570135	159,90	
Viega Sanpress	V 28		570145	159,90
	V 35		570155	159,90
	V 42		570165	373,00
	V 42 (PR-2B)	Z2	572850 R	334,00
	V 54		570175	383,00
	V 54 (PR-2B)	Z2	572851 R	361,00
	Vfz 64,0 (PR-3B) ⁽⁴⁾	Z5	572815 R	641,00
	Vfz 76,1 (PR-3B) ⁽⁴⁾	Z5	572816 R	641,00
	Vfz 88,9 (PR-3B) ⁽⁴⁾	Z5	572817 R	680,00
	Vfz 108,0 (PR-3B) ⁽⁴⁾	Z5	572818 R	680,00
	V 15 S (PR-2B)	Z8	574752 R	131,20
	V 18 S (PR-2B)	Z8	574756 R	131,20
	V 22 S (PR-2B)	Z8	574758 R	131,20
	V 28 S (PR-2B)	Z8	574760 R	131,20
	V 35 S (PR-2B)	Z8	574762 R	131,20
	V 15		570115	159,90
	V 18		570125	159,90
V 22		570135	159,90	
Viega Sanpress	V 28		570145	159,90
	V 35		570155	159,90
	V 42		570165	373,00
	V 42 (PR-2B)	Z2	572850 R	334,00
	V 54		570175	383,00
	V 54 (PR-2B)	Z2	572851 R	361,00
	Vfz 64,0 (PR-3B) ⁽⁴⁾	Z5	572815 R	641,00
	Vfz 76,1 (PR-3B) ⁽⁴⁾	Z5	572816 R	641,00
	Vfz 88,9 (PR-3B) ⁽⁴⁾	Z5	572817 R	680,00
	Vfz 108,0 (PR-3B) ⁽⁴⁾	Z5	572818 R	680,00
	V 15 S (PR-2B)	Z8	574752 R	131,20
	V 18 S (PR-2B)	Z8	574756 R	131,20
	V 22 S (PR-2B)	Z8	574758 R	131,20
	V 28 S (PR-2B)	Z8	574760 R	131,20
	V 35 S (PR-2B)	Z8	574762 R	131,20
	V 15		570115	159,90
	V 18		570125	159,90
V 22		570135	159,90	
Viega Sanpress	V 28		570145	159,90
	V 35		570155	159,90
	V 42		570165	373,00
	V 42 (PR-2B)	Z2	572850 R	334,00
	V 54		570175	383,00
	V 54 (PR-2B)	Z2	572851 R	361,00
	Vfz 64,0 (PR-3B) ⁽⁴⁾	Z5	572815 R	641,00
	Vfz 76,1 (PR-3B) ⁽⁴⁾	Z5	572816 R	641,00
	Vfz 88,9 (PR-3B) ⁽⁴⁾	Z5	572817 R	680,00
	Vfz 108,0 (PR-3B) ⁽⁴⁾	Z5	572818 R	680,00
	V 15 S (PR-2B)	Z8	574752 R	131,20
	V 18 S (PR-2B)	Z8	574756 R	131,20
	V 22 S (PR-2B)	Z8	574758 R	131,20
	V 28 S (PR-2B)	Z8	574760 R	131,20
	V 35 S (PR-2B)	Z8	574762 R	131,20
	V 15		570115	159,90
	V 18		570125	159,90
V 22		570135	159,90	
Viega Sanpress	V 28		570145	159,90
	V 35		570155	159,90
	V 42		570165	373,00
	V 42 (PR-2B)	Z2	572850 R	334,00
	V 54		570175	383,00
	V 54 (PR-2B)	Z2	572851 R	361,00
	Vfz 64,0 (PR-3B) ⁽⁴⁾	Z5	572815 R	641,00
	Vfz 76,1 (PR-3B) ⁽⁴⁾	Z5	572816 R	641,00
	Vfz 88,9 (PR-3B) ⁽⁴⁾	Z5	572817 R	680,00
	Vfz 108,0 (PR-3B) ⁽⁴⁾	Z5	572818 R	680,00
	V 15 S (PR-2B)	Z8	574752 R	131,20
	V 18 S (PR-2B)	Z8	574756 R	131,20
	V 22 S (PR-2B)	Z8	574758 R	131,20
	V 28 S (PR-2B)	Z8	574760 R	131,20
	V 35 S (PR-2B)	Z8	574762 R	131,20
	V 15		570115	159,90
	V 18		570125	159,90
V 22		570135	159,90	
Viega Sanpress	V 28		570145	159,90
	V 35		570155	159,90
	V 42		570165	373,00
	V 42 (PR-2B)	Z2	572850 R	334,00
	V 54		570175	383,00
	V 54 (PR-2B)	Z2	572851 R	361,00
	Vfz 64,0 (PR-3B) ⁽⁴⁾	Z5	572815 R	641,00
	Vfz 76,1 (PR-3B) ⁽⁴⁾	Z5	572816 R	641,00
	Vfz 88,9 (PR-3B) ⁽⁴⁾	Z5	572817 R	680,00
	Vfz 108,0 (PR-3B) ⁽⁴⁾	Z5	572818 R	680,00
	V 15 S (PR-2B)	Z8	574752 R	131,20
	V 18 S (PR-2B)	Z8	574756 R	131,20
	V 22 S (PR-2B)	Z8	574758 R	131,20
	V 28 S (PR-2B)	Z8	574760 R	131,20
	V 35 S (PR-2B)	Z8	574762 R	131,20
	V 15		570115	159,90
	V 18		570125	159,90
V 22		570135	159,90	
Viega Sanpress	V 28		570145	159,90
	V 35		570155	159,90
	V 42		570165	373,00
	V 42 (PR-2B)	Z2	572850 R	334,00
	V 54		570175	383,00
	V 54 (PR-2B)	Z2	572851 R	361,00
	Vfz 64,0 (PR-3B) ⁽⁴⁾	Z5	572815 R	641,00
	Vfz 76,1 (PR-3B) ⁽⁴⁾	Z5	572816 R	641,00
	Vfz 88,9 (PR-3B) ⁽⁴⁾	Z5	572817 R	680,00
	Vfz 108,0 (PR-3B) ⁽⁴⁾	Z5	572818 R	680,00
	V 15 S (PR-2B)	Z8	574752 R	131,20
	V 18 S (PR-2B)	Z8	574756 R	131,20
	V 22 S (PR-2B)	Z8	574758 R	131,20
	V 28 S (PR-2B)	Z8	574760 R	131,20
	V 35 S (PR-2B)	Z8	574762 R	131,20
	V 15		570115	159,90
	V 18		570125	159,90
V 22		570135	159,90	
Viega Sanpress	V 28		570145	159,90
	V 35		570155	159,90
	V 42		570165	373,00
	V 42 (PR-2B)	Z2	572850 R	334,00
	V 54		570175	383,00
	V 54 (PR-2B)	Z2	572851 R	361,00
	Vfz 64,0 (PR-3B) ⁽⁴⁾	Z5	572815 R	641,00
	Vfz 76,1 (PR-3B) ⁽⁴⁾	Z5	572816 R	641,00
	Vfz 88,9 (PR-3B) ⁽⁴⁾	Z5	572817 R	680,00
	Vfz 108,0 (PR-3B) ⁽⁴⁾	Z5	572818 R	680,00
	V 15 S (PR-2B)	Z8	574752 R	131,20
	V 18 S (PR-2B)	Z8	574756 R	131,20
	V 22 S (PR-2B)	Z8	574758 R	131,20
	V 28 S (PR-2B)	Z8	574760 R	131,20
	V 35 S (PR-2B)	Z8	574762 R	131,20
	V 15		570115	159,90
	V 18		570125	159,90
V 22		570135	159,90	
Viega Sanpress	V 28		570145	159,90
	V 35		570155	159,90
	V 42		570165	373,00
	V 42 (PR-			

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
WEECON PRESS-C-Stahl	M 15		570110	159,90
	M 18		570120	159,90
	M 22		570130	159,90
	M 28		570140	159,90
	M 35		570150	159,90
	M 42 (PZ-4G)		570160	515,00
	M 54 (PZ-4G)		570170	515,00
	M 42 (PR-3S)	Z2	572706 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00
	M 76,1 XL (PR-3S)	Z6 XL ¹³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	M 88,9 G XL (PR-3S)	Z6 XL ¹³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
	M 108,0 G XL (PR-3S)	Z6 XL ¹³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
	M 15 S (PR-2B)	Z8	574738 R	131,20
	M 18 S (PR-2B)	Z8	574740 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20
WEECON PRESS-Edelstahl	M 15		570110	159,90
	M 18		570120	159,90
	M 22		570130	159,90
	M 28		570140	159,90
	M 35		570150	159,90
	M 42 (PZ-4G)		570160	515,00
	M 54 (PZ-4G)		570170	515,00
	M 42 (PR-3S)	Z2	572706 R	696,00
	M 54 (PR-3S)	Z2	572708 R	696,00
	M 76,1 XL (PR-3S)	Z6 XL ¹³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.213,00
	M 88,9 G XL (PR-3S)	Z6 XL ¹³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.416,00
	M 108,0 G XL (PR-3S)	Z6 XL ¹³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.416,00
	M 15 S (PR-2B)	Z8	574738 R	131,20
	M 18 S (PR-2B)	Z8	574740 R	131,20
	M 22 S (PR-2B)	Z8	574742 R	131,20
	M 28 S (PR-2B)	Z8	574744 R	131,20
	M 35 S (PR-2B)	Z8	574746 R	131,20
WEECON PRESSSS-Kupfer	V 15		570115	159,90
	V 18		570125	159,90
	V 22		570135	159,90
	V 28		570145	159,90
	V 35		570155	159,90
	V 42		570165	373,00
	V 42 (PR-2B)	Z2	572850 R	334,00
	V 54		570175	383,00
	V 54 (PR-2B)	Z2	572851 R	361,00
	V 15 S (PR-2B)	Z8	574752 R	131,20
	V 18 S (PR-2B)	Z8	574756 R	131,20
	V 22 S (PR-2B)	Z8	574758 R	131,20
	V 28 S (PR-2B)	Z8	574760 R	131,20
WEM	U 16*		570765	180,70
WIELAND-WERKE cuprotherm CTX ²⁾	TH 14 ²⁾		570455	192,90
	TH 16 ²⁾		570460	192,90
WKS-Press	TH 14*		570455	192,90
	TH 16*		570460	192,90
	TH 17*		570462	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	TH 40		570485	255,80
WÜRTH Würth	TH 16*		570460	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
	HE 32		571900	230,50
	HEz 40		571904	334,00

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
X				
XtraConnect	F 16*		570717	183,80
	F 20*		570727	183,80
	F 26*		570730	199,00
	F 32		570735	199,00
	F 16 S (PR-2B)**	Z8	574728 R	150,80
	F 20 S (PR-2B)**	Z8	574730 R	150,80
	F 26 S (PR-2B)**	Z8	574732 R	163,20
	F 32 S (PR-2B)	Z8	574734 R	163,20
	H 16*		570320	173,60
	H 20*		570350	173,60
	H 26*		570370	173,60
	H 32		570380	173,60
	TH 16*		570460	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 32 S (PR-2B)	Z8	574798 R	158,20
(DN 26)	U 16*		570765	180,70
	U 20*		570775	180,70
	U 25*		570780	180,70
	U 32		570785	211,20
	VP 16*		570910	191,90
	VP 20*		570915	191,90
	VP 32		570925	212,20
Z				
ZEWO THERM Zewo Press Premium	TH 12*		570452	192,90
	TH 16*		570460	192,90
	TH 17*		570462	192,90
	TH 18*		570465	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
	TH 32		570480	192,90
	TH 40		570485	255,80
	TH 50 (PZ-S)		572400	669,00
	TH 63 (PZ-S)		572405	669,00
	TH 12 S (PR-2B)**	Z8	574776 R	158,20
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 17 S (PR-2B)**	Z8	574784 R	158,20
	TH 18 S (PR-2B)**	Z8	574786 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
ZEWO THERM Zewo Press PPSU	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 32 S (PR-2B)	Z8	574798 R	158,20
	TH 16*		570460	192,90
	TH 20*		570470	192,90
	TH 26*		570475	192,90
ZURN INDUSTRIES	TH 32		570480	192,90
	TH 16 S (PR-2B)**	Z8	574782 R	158,20
	TH 20 S (PR-2B)**	Z8	574788 R	158,20
	TH 26 S (PR-2B)**	Z8	574794 R	158,20
	TH 32 S (PR-2B)	Z8	574798 R	158,20
ZURN PEX	US ¾**		571450	219,30
	US ½**		571455	219,30
	US ¾**		571460	219,30
	US 1**		571465	219,30
	US 1 ¼**		571470	219,30
	US 1 ½**		571475	219,30
	US 2"		571477	295,40

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 227. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 227. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 230.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC, see page 238.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

¹³⁾ Only pressing tongs/S pressing rings (PR-2B) from designation "125" (1st quarter of 2025), "225" (2nd quarter of 2025) etc. can be used. The designation is stamped on every pressing jaw.

The suitability of REMS pressing tools for pressfitting systems: Date 13.10.2025. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 288 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs Set

Accessories for REMS radial presses 32 kN and suitable radial presses of other makes with 32 kN thrust force



Info



Supply format

REMS pressing tongs Set. REMS pressing tongs (PZ-2B) with 2 swivellable monoblock pressing jaws. REMS pressing tongs (PZ-4G) with two pivoted, parallel aligned pressing segments for linear pressing of midsize dimensions. Highly durable, made of tenacious, specially hardened special steel. The pressing contours are system-specific and correspond to the pressing contours of the respective press fitting systems. Thus perfect system-conformity, safe press jointing. Driven by REMS radial presses 32 kN and suitable radial presses of other makes with 32 kN thrust force. All pressing tongs marked with * have an optional connection for manual drive through the radial press REMS Eco-Press. In L-Boxx system case or in sturdy steel case.

Description	Art.-No.	€
REMS pressing tongs Set in L-Boxx system case		
Set ACz 12 + 16 + 20*	571180R	752,00
Set B 16 + 20 + 26	571174R	801,90
Set BMP ¼ + ⅜ + ½ + ⅝"	571184R	912,60
Set BMP ¼ + ⅜ + ½ + ⅝ + ¾ + ⅞ + 1 + 1 ⅙"	571185R	1.676,20
Set F 16 + 20 + 26*	571172R	715,60
Set F 16 + 20 + 26 + 32	571194R	914,60
Set G 16 + 20 + 26*	571173R	739,90
Set H 16 + 20 + 26*	571177R	669,80
Set HA 16 + 20 + 26*	571178R	825,80
Set M 15 + 18 + 22 + 28	571165R	788,60
Set M 15 + 18 + 22 + 28 + 35	571161R	948,50
Set M 15 + 22 + 28 + 35	571163R	788,60
Set RFz 12 + 16 + 20*	571179R	752,00
Set RFz 16 + 20 + 25	571175R	752,00
Set RFz 16 + 20 + 25 + 32	571191R	953,00
Set RN 16 + 20 + 25/26	571176R	691,10
Set TH 16 + 20 + 26*	571169R	727,70
Set TH 16 + 20 + 26 + 32	571188R	920,60
Set U 16 + 20 + 25*	571170R	691,10
Set U 16 + 20 + 25 + 32	571192R	902,30
Set U 16 + 20 + 26 + 32	571189R	932,80
Set UP 16 + 20 + 25	571171R	691,10
Set UP 16 + 20 + 25 + 32	571190R	902,30
Set V 14 + 16 + 22 + 28	571167R	788,60
Set V 15 + 18 + 22 + 28	571166R	788,60
Set V 15 + 18 + 22 + 28 + 35	571162R	948,50
Set V 15 + 22 + 28 + 35	571164R	788,60
Set VG 14 + VG 16 + V 22 + V 28	571168R	788,60
Set VMPz ½ + ¾ + 1"	571182R	815,90
Set VMPz ⅝ + ½ + ¾ + 1"	571183R	1.038,20
Set VP 16 + 20 + 25	571187R	724,70
Set VRX 16 + 20 + 25	571186R	775,30
Set VRX 16 + 20 + 25 + 32	571193R	997,60
REMS pressing tongs Set in sturdy steel case		
Set M 42 + 54 (PZ-4G)	571158R	1.133,00
Set V 42 + 54	571157R	859,00

REMS pressing rings S Set

Accessories for REMS radial presses 32 kN and suitable radial presses of other makes with 32 kN thrust force



Info



Supply format

REMS pressing rings S Set Z8. REMS pressing rings S (PR-2B), continuously swivellable, with 2 pressing jaws, for secure engagement of the pressing jaws in places of difficult access. Highly durable, made of tenacious, specially hardened special steel. The pressing contours are system-specific and correspond to the pressing contours of the respective press fitting systems. Thus perfect system-conformity, safe press jointing. Adapter tongs Z8 for driving by REMS radial presses 32 kN and suitable radial presses of other makes with a thrust force of 32 kN. **Can also be driven by the REMS Eco-Press manual radial press.

Description	Art.-No.	€
REMS pressing rings S Set Z8 in sturdy steel case		
Set F 16 + 20 + 26**	574621R	720,80
Set M 15 + 18 + 22	574615R	649,60
Set M 15 + 22 + 28	574619R	649,60
Set TH 16 + 20 + 26**	574623R	730,60
Set U 16 + 20 + 25**	574635R	700,60
Set U 16 + 20 + 26**	574637R	725,60
Set V 15 + 18 + 22	574613R	649,60
Set V 15 + 22 + 28	574617R	649,60
REMS pressing rings S Set Z8 in L-Boxx system case		
Set BMP 6 + 8 + 10 + 12 + 15 + 16 + 18 + 22 + 28	574625R	1.711,40
Set BMP ¼ + ⅜ + ½ + ⅝ + ¾ + ⅞	574633R	1.241,60
Set M 12 + 15 + 18 + 22 + 28 + 35	574627R	1.089,20
Set V 12 + 15 + 18 + 22 + 28 + 35	574629R	1.089,20
Set V 12 + 14 + 15 + 16 + 18 + 22 + 28 + 35	574631R	1.351,60

REMS pressing rings Set

Accessories for REMS radial presses 32 kN and suitable radial presses of other makes with 32 kN thrust force



Info

Supply format

REMS pressing rings Set. REMS pressing rings (PR-3S) with 3 pressing segments, 2 swivel guided, for large dimension complex pressings. Ideal pressing through radially controlled movement of pressing segments. Highly durable, made of tenacious, specially hardened special steel. The pressing contours are system-specific and correspond to the pressing contours of the respective press fitting systems. Thus perfect system-conformity, safe press jointing. Adapter tongs Z2 for driving by REMS radial presses 32 kN and suitable radial presses of other makes with a thrust force of 32 kN. In L-Boxx system case.

Description	Art.-No.	€
Set M 42 + 54 + Z2	572062R	1.696,00

Supply format

REMS pressing rings Set. REMS pressing rings (PR-2B) with 2 pressing jaws, for secure engagement of the pressing jaws in tight spaces, for midsize dimensions. Highly durable, made of tenacious, specially hardened special steel. The pressing contours are system-specific and correspond to the pressing contours of the respective press fitting systems. Thus perfect system-conformity, safe press jointing. Adapter tongs Z2 for driving by REMS radial presses 32 kN and suitable radial presses of other makes with a thrust force of 32 kN. In sturdy steel case.

Description	Art.-No.	€
Set V 42 + 54 + Z2	572061R	908,70

REMS pressing rings XL Set

Accessories for REMS Akku-Press XL 45 kN 22 V ACC



Info

Supply format

REMS pressing rings XL Set. REMS pressing rings XL (PR-3B) with 3 pressing segments, 2 swivel guided, for large dimension complex pressings. Ideal pressing through radially controlled movement of pressing segments. Highly durable, made of tenacious, specially hardened special steel. The pressing contours are system-specific and correspond to the pressing contours of the respective press fitting systems. Thus perfect system-conformity, safe press jointing. Adapter tongs Z7 XL 45 kN required. Driven by REMS Akku-Press XL 45 kN 22 V ACC. In L-Boxx system case.

Description	Art.-No.	€
Set VMPz 2 ½ + 3+ 4"	571181R	2.097,00